arXiv: xxxxxx, 2015
Volume 00, Number 0, Pages 000–000

arXiv:1512.02960v1 [cs.CG] 9 Dec 2015

ENSEMBLES OF CYCLES PROGRAMMED IN GiNaC

VLADIMIR V. KISIL

Abstract. This library manipulates ensembles of cycles (quadrics), which are interrelated through certain geometric relations (to be orthogonal, to be tangent, etc.). The code operates with numeric and symbolic data of cycles in spaces of arbitrary dimensionality and metrics with any signatures. In the two-dimensional case illustrations and animations can be produced.

Contents

1. Introduction 2
2. Lie Spheres Geometry and the **cycle** Library 2
2.1. Lie spheres geometry and SFSC construction 3
2.2. Clifford algebras, Möbius transformations, and Cycles 3
3. Ensembles of Interrelated Cycles and the **figure** Library 4
3.1. Connecting quadrics and cycles 4
3.2. Figures as families of cycles—functional approach 5
4. Mathematical Usage of the Library 6
5. To Do List 7
Acknowledgement 8
References 8
Appendix A. Examples of Usage 9
A.1. Hello, Cycle! 9
A.2. Animated cycle 10
A.3. An illustration of the modular group action 11
A.4. The nine-points theorem—conformal version 12
A.5. Proving the theorem: Symbolic computations 16
A.6. Numerical relations 18
A.7. An example of calculations in three dimensions 20
Appendix B. Public Methods in the **figure** class 21
B.1. Creation and re-setting of **figure**, changing *metric* 21
B.2. Adding elements to figure 22
B.3. Modification, deletion and searches of nodes 22
B.4. Check relations and measure parameters 23
B.5. Accessing elements of the figure 24
B.6. Drawing and printing 25
B.7. Saving and openning 26
Appendix C. Public methods in **cycle_relation** 27
Appendix D. Addtional utilities 29
Appendix E. Figure Library Header File 29
E.1. **cycle_data** class declaration 30
E.2. **cycle_node** class declaration 31
E.3. **cycle_relation** class declaration 33
E.4. **subfigure** class declaration 35
E.5. **figure** class declaration 36
E.6. `Asymptote` customization 39
Appendix F. Implementation of Classes 39
F.1. Implementation of **cycle_data** class 40
F.2. Implementation of **cycle_relation** class 46
F.3. Implementation of **subfigure** class 52
F.4. Implementation of **cycle_node** class 54
F.5. Implementation of **figure** class 60
F.6. Functions defining cycle relations 94
F.7. Additional functions 98

Date: December 10, 2015 (v2.3).
2010 *Mathematics Subject Classification.* Primary 51B25; Secondary 51N25, 68U05, 11E88, 68W30.
On leave from Odessa University.

Appendix G. Change Log 101
Appendix H. License 101
Appendix I. Index of Identifiers 102

1. Introduction

This library manipulates ensembles of cycles (quadrics), which interrelate through certain geometric conditions. The code is build on top of the library which manipulates individual cycles [16, 17, 19] within the GiNaC [1] computer algebra system. The core of the library is capable to work in spaces of any dimensionlity and arbitrary (elliptic, parabolic, or hyperbolic) metric. However, drawing routines are limited (at present) to two-dimensional spaces (with any metric).

The paper outline is as follows. In Section 2 we sketch the mathematical foundation—that is the Lie spheres geometry—of the package consisting of the previous library **cycle** [17] and the present library **figure**. In Sec. 3 we describe the architecture of the present library **figure**. Sec. 4 provides some examples of mathematical usage of the library. We conclude by a brief list of some further tasks in Sec. 5.

All coding-related material is enclosed as appendices. App. A contains examples of the library usage starting from the very simple ones. A systematic list of callable methods is given in Apps B–D. Any of Sec. 2 or Apps A–B can serve as an entry point for a reader with respective preferences and background. Actual code of the library is collected in Apps E–F.

2. Lie Spheres Geometry and the **cycle** Library

We briefly outline mathematical formalism which is realised in the library. We do not aim to present the complete theory, instead we provide a minimal description with a sufficient amount of references to further sources. The library naturally splits into two components: the routines handling individual cycles, which were already introduced elsewhere [17], and the new component implemented in this work, which handles families of interrelated cycles.

2.1. **Lie spheres geometry and SFSC construction.** Lie sphere geometry in $\mathbb{R}^n$ starts from an observation that points can be treated as spheres of zero radius and planes are the limiting case of spheres with radii diverging to infinity. Oriented spheres, planes and points are called together *cycles*. Then, the second crucial step is to treat cycles not as subsets of $\mathbb{R}^n$ but rather as points of some projective space of higher dimensionality, see [2, Ch. 3; 3; 9].

To distinguish two spaces we will call $\mathbb{R}^n$ as the *point space* and the higher dimension space, where cycles are represented by points,—the *cycle space*. Next important observation is that geometrical relations between cycles as subsets of the point space can be expressed in term of some indefinite metric on the cycle space. Therefore, if an indefinite metric shall be considered anyway, there is no reason to be limited to spheres in Euclidean space $\mathbb{R}^n$ only. The same approach shall be adopted for quadrics in pseudo-Euclidean space $\mathbb{R}^{pqr}$ of an arbitrary signature $p+q+r=n$, including r nilpotent elements, cf. (1) below.

A useful addition to Lie spheres geometry is provided by the Schwerdtfeger–Fillmore–Springer–Cnops construction (SFSCc) [5, § 4.1; 8; 15, § 4.2; 18; 19, § 4.2; 23, § 18; 25, § 1.1]. It is a correspondence between the cycles (as points of the cycle space) and certain 2×2-matrices defined in (3) below. The main advantages of SFSCc are:

(i) The correspondence between cycles and matrices respects the projective structure of the cycle space.
(ii) The correspondence is Möbius covariant.
(iii) The indefinite metric on the cycle space can be expressed through natural operations on the respective matrices.

The last observation is that for restricted groups of Möbius transformations the metric of the cycle space may not be completely determined by the metric of the point space, see [19, § 4.2] for an example in two-dimensional space.

We turn now to the explicit definitions.

2.2. **Clifford algebras, Möbius transformations, and Cycles.** We describe here the mathematics behind the the first library called **cycle**, which implements fundamental geometrical relations between quadrics in the space $\mathbb{R}^{pqr}$ with the dimensionality $n=p+q+r$ and metric $x_1^2+\ldots+x_p^2-x_{p+1}^2-\ldots-x_{p+q}^2$.

The Clifford algebra $\mathcal{C}\ell(p,q,r)$ is the associative unital algebra over $\mathbb{R}$ generated by the elements $e_1,\ldots,e_n$ satisfying the following relation:

$$e_ie_j=-e_je_i\,,\quad \text{and}\quad e_i^2=\begin{cases}-1, & \text{if } 1\le i\le p;\\ 1, & \text{if } p+1\le i\le p+q;\\ 0, & \text{if } p+q+1\le i\le p+q+r.\end{cases} \tag{1}$$

It is common [5, 6, 23] to consider mainly Clifford algebras $\mathcal{C}\ell(n)=\mathcal{C}\ell(n,0,0)$ of the Euclidean space or the algebra $\mathcal{C}\ell(p,q)=\mathcal{C}\ell(p,q,0)$ of the pseudo-Euclidean spaces. However, Clifford algebras $\mathcal{C}\ell(p,q,r)$, $r>0$ with nilpotent generators $e_i^2=0$ correspond to interesting geometry [18, 19, 26] and physics [11–13, 20, 21] as well. Yet, the geometry with idempotent units in spaces with dimensionality $n>2$ is still not sufficiently elaborated.

An element of $\mathcal{C}\ell(p,q,r)$ having the form $x=x_1e_1+\ldots+x_ne_n$ can be associated with the vector $(x_1,\ldots,x_n)\in\mathbb{R}^{pqr}$. The *reversion* $a\mapsto a^*$ in $\mathcal{C}\ell(p,q,r)$ [5, (1.19(ii))] is defined on vectors by $x^*=x$ and extended to other elements by the relation $(ab)^*=b^*a^*$. Similarly the *conjugation* is defined on vectors by $\bar{x}=-x$ and the relation $\overline{ab}=\bar{b}\bar{a}$. We also use the notation $|a|^2=a\bar{a}$ for any product a of vectors. An important observation is that any non-zero $x\in\mathbb{R}^{n00}$ has a multiplicative inverse: $x^{-1}=\frac{\bar{x}}{|x|^2}$. For a 2×2-matrix M with Clifford entries we define, cf. [5, (4.7)]

$$\bar{M}=\begin{pmatrix}d^* & -b^*\\ -c^* & a^*\end{pmatrix}\qquad\text{and}\qquad M^*=\begin{pmatrix}\bar{d} & \bar{b}\\ \bar{c} & \bar{a}\end{pmatrix}. \tag{2}$$

Then $M\bar{M}=\delta I$ for the *pseudodeterminant* $\delta:=ad^*-bc^*$.

Quadrics in $\mathbb{R}^{pq}$—which we continue to call cycles—can be associated to 2×2 matrices through the SFSC construction [5, (4.12); 8; 19, § 4.4]:

$$k\bar{x}x-l\bar{x}-x\bar{l}+m=0\quad\leftrightarrow\quad C=\begin{pmatrix}l & m\\ k & \bar{l}\end{pmatrix}, \tag{3}$$

where $k,m\in\mathbb{R}$ and $l\in\mathbb{R}^{pq}$. For brevity we also encode a cycle by its coefficients (k,l,m). A justification of (3) is provided by the identity:

$$\begin{pmatrix}1 & \bar{x}\end{pmatrix}\begin{pmatrix}l & m\\ k & \bar{l}\end{pmatrix}\begin{pmatrix}x\\ 1\end{pmatrix}=kx\bar{x}-l\bar{x}-x\bar{l}+m,\qquad\text{since } \bar{x}=-x \text{ for } x\in\mathbb{R}^{pq}.$$

The identification is also Möbius-covariant in the sense that the transformation associated with the matrix $M=\begin{pmatrix}a & b\\ c & d\end{pmatrix}$ sends a cycle C to the cycle MCM^* [5, (4.16)]. We define the Möbius-invariant inner product of cycles C_1 and C_2 by the identity

$$\langle C_1,C_2\rangle=\Re\,\mathrm{tr}(C_1C_2)\,, \tag{4}$$

where $\Re$ denotes the scalar part of a Clifford number. This definition in term of matrices immediately implies that the inner product is Möbius-invariant. The explicit expression in terms of components of cycles $C_1=(k_1,l_1,m_1)$ and $C_2=(k_2,l_2,m_2)$ is also useful sometimes:

$$\langle C_1,C_2\rangle=l_1l_2+\bar{l}_1\bar{l}_2+m_1k_2+m_2k_1\,. \tag{5}$$

As usual, the relation $\langle C_1, C_2\rangle = 0$ is called the *orthogonality* of cycles C_1 and C_2. In most cases it corresponds to orthogonality of quadrics in the point space. More generally, most of Möbius-invariant relations between quadrics may be expressed in terms Möbius-invariant inner product (4). For the full description of methods on individual cycles, which are implemented in the library **cycle**, see the respective documentation [17].

3. Ensembles of Interrelated Cycles and the **figure** Library

The library **figure** has an ability to store and resolve system of geometric relations between cycles. We explain below some mathematical foundations, which greatly simplify this task.

3.1. **Connecting quadrics and cycles.** We need a vocabulary, which translates geometric properties of quadrics on the point space to corresponding relations in the cycle space. The key ingredient is the cycle product (4)–(5), which is linear in cycles parameters. However, certain conditions, e.g. tangency of cycles, involve polynomials of cycle products and thus are non-linear. For a successful algorithmic implementation, the following observation is important: *all non-linear conditions below can be linearised if the additional quadratic condition of normalisation type is imposed*:

$$\langle C, C\rangle = \pm 1. \tag{6}$$

This observation in the context of the Appolonius problem was already made in [9]. Conceptually the present work has a lot of common with the above mentioned paper of Fillmore and Springer, however a reader need to be warned that our implementation is totally different (and, interestingly, is more closer to another paper [8] of Fillmore and Springer).

Here is the full list of used relations between cycles.

(i) A quadric is flat (i.e. is a hyperplane), that is, its equation is linear. Then, either of two equivalent conditions can be used:
  (a) k component of the cycle vector is zero;
  (b) the cycle is orthogonal $\langle C_1, C_\infty\rangle = 0$ to the "zero-radius cycle at infinity" $C_\infty = (0, 0, 1)$.

(ii) A quadric on the plane represent a line in Lobachevsky-type geometry if it is orthogonal $\left\langle C_1, C_{\mathbb{R}}\right\rangle = 0$ to to the real line cycle C_R. A similar condition is meaningful in higher dimensions as well.

(iii) A quadric C represents a point, that is, it has zero radius at given metric of the point space. Then, the determinant of the corresponding SFSC matrix is zero or, equivalently, the cycle is self-orthogonal (isotropic): $\langle C, C\rangle = 0$. Naturally, such a cycle cannot be normalised to the form (6).

(iv) Two quadrics are orthogonal in the point space $\mathbb{R}^{pq}$. Then, the vectors representing cycles are orthogonal in the sense of the inner product (4).

(v) Two cycles C and $\tilde{C}$ are tangent. Then we have the following quadratic condition:

$$\left\langle C, \tilde{C}\right\rangle^2 = \langle C, C\rangle \left\langle \tilde{C}, \tilde{C}\right\rangle. \tag{7}$$

With the assumption, that the cycle C is normalised by the condition (6), we may re-state this condition in the relation, which is linear to components of the cycle C:

$$\left\langle C, \tilde{C}\right\rangle = \pm\sqrt{\left\langle \tilde{C}, \tilde{C}\right\rangle}. \tag{8}$$

Different signs here represent internal and outer touch.

(vi) Inversive distance θ of two (non-isotropic) cycles is defined by the formula:

$$\left\langle C, \tilde{C}\right\rangle = \theta\sqrt{\langle C, C\rangle}\sqrt{\left\langle \tilde{C}, \tilde{C}\right\rangle} \tag{9}$$

In particular, the above discussed orthogonality corresponds to $\theta = 0$ and the tangency to $\theta = \pm 1$. For intersecting spheres θ provides the cosine of the intersecting angle. For other metrics, the geometric interpretation of inversive distance shall be modified accordingly.

If we are looking for a cycle C with a given inversive distance θ to a given cycle $\tilde{C}$, then the normalisation (6) again turns the defining relation (9) into a linear with respect to parameters of the unknown cycle C.

(vii) A generalisation of Steiner power d of two cycles is defined as, cf. [9, § 1.1]:

$$d = \left\langle C, \tilde{C}\right\rangle + \sqrt{\langle C, C\rangle}\sqrt{\left\langle \tilde{C}, \tilde{C}\right\rangle}, \tag{10}$$

where both cycles C and $\tilde{C}$ are k-normalised, that is the coefficient in front the quadratic term in (3) is 1. Geometrically, the generalised Steiner power for spheres provides the square of tangential distance. However, this relation is again non-linear for the cycle C.

If we replace C by the cycle $C_1 = \frac{1}{\sqrt{\langle C, C\rangle}}C$ satisfying to (6), the identity becomes:

$$d \cdot k = \left\langle C_1, \tilde{C}\right\rangle + \sqrt{\left\langle \tilde{C}, \tilde{C}\right\rangle}, \tag{11}$$

where $k = \frac{1}{\sqrt{\langle C,C\rangle}}$ is the coefficient in front of the quadratic term of C_1. The last identity is linear in terms of the coefficients of C_1.

Summing up: if an unknown cycle is connected to already given cycles by any combination of the above relations, then all conditions can be expressed as a system of linear equations for coefficients of the unknown cycle and at most one quadratic equation (6).

3.2. **Figures as families of cycles—functional approach.** The **figure** library realises *functional programming* approach to ensembles of cycles. More specifically, an object from the **class figure** stores defining relations, which link new cycles to the previously introduced ones. This also may be treated as classical geometric compass-and-straightedge constructions, where new lines or circles are drawn through already existing elements. If requested, an explicit evaluations of cycles' parameters from this data may be attempted.

To avoid "chicken or the egg" dilemma all cycles are stored in a hierarchical structure of generations, numbered by integers. The basic principles are:

(i) Any explicitly defined cycle (i.e., a cycle which is not related to any previously known cycle) is placed into generation-0;

(ii) Any new cycle defined by relations to *previous* cycles from generations k_1, k_2, ..., k_n is placed to the generation k calculated as:

$$k = \max(k_1, k_2, \ldots, k_n) + 1. \tag{12}$$

This rule does not forbid a cycle to have a relation to itself, e.g. isotropy (self-orthogonality) condition $\langle C, C\rangle = 0$, which specifies point-like cycles, cf. 3.1(iii) in the previous subsection. In fact, this is the only allowed type of relations to cycles in the same (not even speaking about younger) generations.

There are the following alterations of the above rules:

(i) From the beginning, every figure has two pre-defined cycles: the real line (hyperplane) $C_{\mathbb{R}}$, and the zero radius cycle at infinity $C_\infty = (0, 0, 1)$. These cycles are required for relations 3.1(i) and 3.1(ii) from the previous subsection. As predefined cycles, $C_{\mathbb{R}}$ and C_∞ are placed in negative-numbered generations defined by the macros *REAL_LINE_GEN* and *INFINITY_GEN*.

(ii) If a point is added to generation-0 of a figure, then it is represented by a zero-radius cycle with its centre at the given point. Particular parameter of such cycle dependent on the used metric, thus this cycle is not considered as explicitly defined. Thereafter, the cycle shall have some parents at a negative-numbered generation defined by the macro *GHOST_GEN*.

A figure can be in two different modes: *freeze* or *unfreeze*, the second is default. In the *unfreeze* mode an addition of a new cycle by its relation prompts an evaluation of its parameters. If the evaluation was successful then the obtained parameters are stored and will be used in further calculations for all children of the cycle. Since many relations (see the previous Subsection) are connected to quadratic equation (6), the solutions may come in pairs. Furthermore, if the number or nature of conditions is not sufficient to define the cycle uniquely (up to natural quadratic multiplicity), then the cycle will depend on a number of free variable.

There is a macro-like tool, which is called **subfigure**. Such a **subfigure** is a **figure** itself, such that its inner hierarchy of generations and relations is not visible from the current **figure**. Instead, some cycles (of any generations) of the current **figure** are used as predefined cycles of generation-0 of **subfigure**. Then only one dependent cycle of **subfigure**, which is known as result, is returned back to the current **figure**. The generation of the result is calculated from generations of input cycles by the same formula (12).

There is a possibility to test certain conditions ("are two cycles orthogonal?") or measure certain quantities ("what is their intersection angle?") for already defined cycles. In particular, such methods can be used to prove geometrical statements according to the Cartesian programme to replace the synthetic geometry by purely algebraic manipulations.

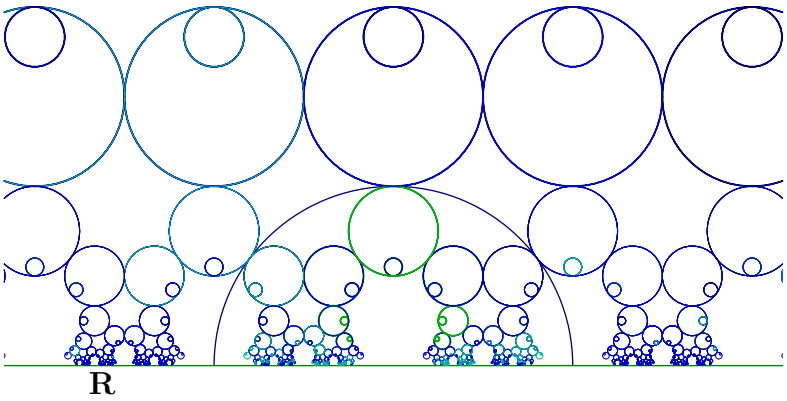

FIGURE 1. Action of the modular group on the upper half-plane.

4. Mathematical Usage of the Library

The developed libraries have several different uses:

- It is easy to produce high-quality illustrations, which are fully-accurate in mathematical sence. The user is not responsible for evaluation of cycles' parameters, all computations are done by the library as soon as the figure is defined in term of few geometrical relations. This is especially helpful for complicated images which may contain thousands of interrelated cycles. See Escher-like Fig. 1 which shows images of two circles under the modular group action, cf. A.3.
- The package can be used for computer experiments in Lie cycles geometry. There is a possibility to create an arrangement of cycles depending on one or several parameters. Then, for particular values of those parameters certain conditions, e.g. concurrency of cycles, may be numerically tested or graphically visualised. A possibility to create animations with gradual change of the parameters especially convenient for the later.
- Since the library is based on GiNaC system, which provides a symbolic calculation engine, there is a possibility to make fully automatic proofs of various statements in Lie cycle geometry.

Computer experiments are especially valuable for Lie geometry of indefinite or nilpotent metrics since our intuition is not elaborated there in contrast to the Euclidean space. Some advances in the two-dimensional space were achieved recently [19], however further developments in higher dimensions are still awaiting their researchers.

As an example of automated proof accomplished by the **figure** library for the first time, we present hyperbolic version of nine-point theorem, cf. Fig. 2(a):

Theorem 1 (Nine-point cycle)**.** *Let ABC be an arbitrary triangle with the orthocenter (the points of intersection of three altitudes) H, then the following nine points belongs to the same cycle, which may be a circle or a hyperbola:*

(i) *Foots of three altitudes, that is points of pair-wise intersections AB and CH, AC and BH, BC and AH.*
(ii) *Midpoints of sides AB, BC and CA.*
(iii) *Midpoints of intervals AH, BH and CH.*

There are many further interesting properties, e.g. nine-point circle is externally tangent to that triangle three excircles and internally tangent to its incircle as it seen from Fig. 2(a).

To adopt the statement for cycles geometry we need to find a Möbius invariant meaning of the midpoint A_m of an interval BC, because the equality of distances BA_m and A_mC is not Möbius invariant. The definition in cycles geometry can be done by either of the following equivalent relations:

- The midpoint A_m of an interval BC is defined by the cross-ratio $\frac{BA_m}{CA_m} : \frac{BI}{CI} = 1$, where I is the point at infinity.
- We construct the midpoint A_m of an interval BC as the intersection of the interval and the line orthogonal to BC and to the cycle, which uses BC as its diameter. The later condition means that the cycle passes both points B and C and is orthogonal to the line BC.

The both procedures are meaningful if we replace the point at infinity I by an arbitrary fixed point F of the plane. In the second case all lines will be replaced by cycles passing F, for example the line through B and C shall be replaced by a cycyle through B, C and F. If we similarly replace "lines" by "cycles passing F" in Thm. 1 it turns into a valid Möbius-invariant version, cf. Fig. 2(b). Some additional properties, e.g. the tangency of the nine-points circle to the ex-/in-circles, are preserved in the new version as well. Furthermore, we can illustrate the connection between two versions of the theorem by an animation, where the infinity is transformed to a finite point F by a continuous one-parameter group of Möbius transformations.

It is natural to test the nine-point theorem in the hyperbolic and the parabolic spaces. Fortunately, it is very easy under the given implementation: we only need to change the defining metric of the point space, this can be done for an already defined figure, see A.4. The corresponding figures Fig. 2(c) and (d) suggest that the hyperbolic version of the theorem is still true in the plain and even Möbius invariant forms. We shall clarify that the hyperbolic version

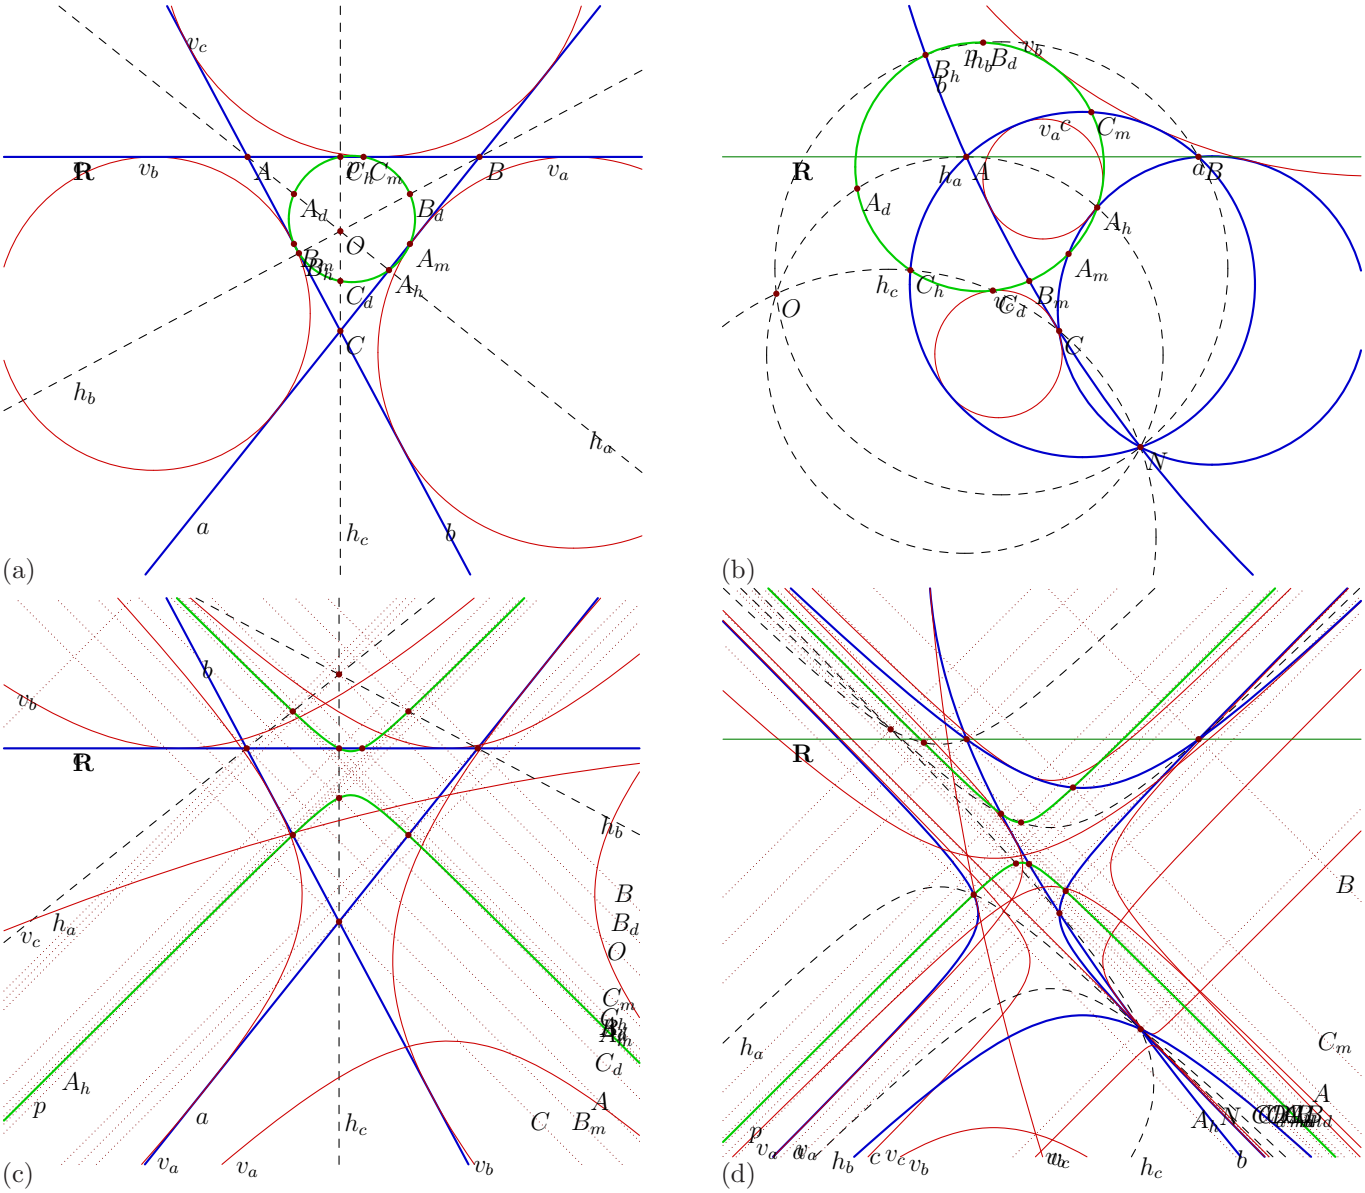

FIGURE 2. The illustration of the conformal nine-points theorem. The left column is the statement for a triangle with straight sides (the point N is at infinity), the right column is its conformal version (the point N is at the finite part). The first row show the elliptic point space, the second row—the hyperbolic point space. Thus, the top-left pictures shows the traditional theorem, three other pictures—its different modifications.

of the Thm. 1 specialises the nine-point conic of a complete quadrilateral [4, 7]: in addition to the existence of this conic, the our theorem specifies its type for this particular arrangement as equilateral hyperbola with the vertical axis of symmetry.

The computational power of the package is sufficient not only to hint that the new theorem is true but also to make a complete proof. To this end we define an ensemble of cycles with exactly same interrelations, but populate the generation-0 with points A, B and C with symbolic coordinates, that is, objects of the GiNaC **class realsymbol**. Thus, the entire figure defined from them will be completely general. Then, we may define the hyperbola passing three bases of altitudes and check by the symbolic computations that this hyperbola passes another six "midpoints" as well, see A.5.

In the parabolic space the nine-point Thm. 1 is not preserved in this manner. It is already observed [19], that the degeneracy of parabolic metric in the point space requires certain revision of traditional definitions. The parabolic variation of nine-point theorem may prompt some further considerations as well. An expanded discussion of various aspects of the nine-point construction shall be the subject of a separate paper.

5. To Do List

The library is still under active development. Along with continuous bug fixing there is an intention to extend both functionality and usability. Here are several nearest tasks planned so far:

- Addition of a method which will apply a Möbius transformation of the entire figure.

- Provide drawing facilities for cycles in three dimensions.
- Creation of Graphical User Interface which will open the library to users without programming skills.

Being an open-source project the library is open for contributions and suggestions of other developers and users.

Acknowledgement

I am grateful to Prof. Jay P. Fillmore for stimulating discussion, which enriched this library.

References

[1] Christian Bauer, Alexander Frink, Richard Kreckel, and Jens Vollinga. *GiNaC is Not a CAS*, 2001. URL: http://www.ginac.de/. ↑2
[2] Walter Benz. A fundamental theorem for dimension-free Möbius sphere geometries. *Aequationes Math.*, **76** (1–2):191–196, 2008. ↑3
[3] Thomas E. Cecil. *Lie sphere geometry: With applications to submanifolds*. Universitext. Springer, New York, Second, 2008. ↑3
[4] Zvonko Cerin and Gian Mario Gianella. On improvements of the butterfly theorem. *Far East J. Math. Sci. (FJMS)*, **20** (1):69–85, 2006. ↑7
[5] Jan Cnops. *An introduction to Dirac operators on manifolds*. Progress in Mathematical Physics, vol. 24. Birkhäuser Boston Inc., Boston, MA, 2002. ↑3
[6] R. Delanghe, F. Sommen, and V. Souček. *Clifford algebra and spinor-valued functions. A function theory for the Dirac operator*. Mathematics and its Applications, vol. 53. Kluwer Academic Publishers Group, Dordrecht, 1992. Related REDUCE software by F. Brackx and D. Constales, With 1 IBM-PC floppy disk (3.5 inch). ↑3
[7] Michael DeVilliers. The nine-point conic: a rediscovery and proof by computer. *International Journal of Mathematical Education in Science and Technology*, **37** (1):7–14, 2006. ↑7
[8] Jay P. Fillmore and A. Springer. Möbius groups over general fields using Clifford algebras associated with spheres. *Internat. J. Theoret. Phys.*, **29** (3):225–246, 1990. ↑3, 4
[9] Jay P. Fillmore and Arthur Springer. Determining circles and spheres satisfying conditions which generalize tangency, 2000. preprint, http://www.math.ucsd.edu/~fillmore/papers/2000LGalgorithm.pdf. ↑3, 4, 18, 19, 20, 73
[10] GNU. *General Public License (GPL)*. Free Software Foundation, Inc., Boston, USA, version 3, 2007. URL: http://www.gnu.org/licenses/gpl.html. ↑101
[11] N. A. Gromov. Possible quantum kinematics. II. Nonminimal case. *J. Math. Phys.*, **51** (8):083515, 12, 2010. ↑3
[12] N. A. Gromov and V. V. Kuratov. Possible quantum kinematics. *J. Math. Phys.*, **47** (1):013502, 9, 2006. ↑3
[13] N.A. Gromov. *Контракции классических и квантовых групп. [contractions of classic and quantum groups]*. Moskva: Fizmatlit, 2012. ↑3
[14] Andy Hammerlindl, John Bowman, and Tom Prince. *Asymptote—powerful descriptive vector graphics language for technical drawing, inspired by MetaPost*, 2004. URL: http://asymptote.sourceforge.net/. ↑13, 21, 25
[15] A. A. Kirillov. *A tale of two fractals*. Springer, New York, 2013. Draft: http://www.math.upenn.edu/~kirillov/MATH480-F07/tf.pdf. ↑3
[16] Vladimir V. Kisil. Erlangen program at large–0: Starting with the group $SL_2(\mathbf{R})$. *Notices Amer. Math. Soc.*, **54** (11):1458–1465, 2007. arXiv:math/0607387, On-line. Zbl1137.22006. ↑2, 9, 13, 14
[17] ———. Schwerdtfeger–Fillmore-Springer-Cnops construction implemented in GiNaC. *Adv. Appl. Clifford Algebr.*, **17** (1):59–70, 2007. On-line. Updated full text, source files, and live ISO image: arXiv:cs.MS/0512073. Project page http://moebinv.sourceforge.net/. Zbl05134765. ↑2, 4
[18] ———. Erlangen program at large–1: Geometry of invariants. *SIGMA, Symmetry Integrability Geom. Methods Appl.*, **6** (076):45, 2010. arXiv:math.CV/0512416. MR2011i:30044. Zbl1218.30136. ↑3, 11
[19] ———. *Geometry of Möbius transformations: Elliptic, parabolic and hyperbolic actions of* $SL_2(\mathbf{R})$. Imperial College Press, London, 2012. Includes a live DVD. Zbl1254.30001. ↑2, 3, 6, 7, 9, 13, 14, 21, 23, 25, 27, 38, 73, 95
[20] ———. Is commutativity of observables the main feature, which separate classical mechanics from quantum?. *Известия Коми научного центра УрО РАН [Izvestiya Komi nauchnogo centra UrO RAN]*, **3** (11):4–9, 2012. arXiv:1204.1858. ↑3
[21] ———. Induced representations and hypercomplex numbers. *Adv. Appl. Clifford Algebras*, **23** (2):417–440, 2013. arXiv:0909.4464. Zbl1269.30052. ↑3
[22] ———. Ensembles of cycles programmed in GiNaC, 2014. http://moebinv.sourceforge.net/. ↑21
[23] Ian R. Porteous. *Clifford algebras and the classical groups*. Cambridge Studies in Advanced Mathematics, vol. 50. Cambridge University Press, Cambridge, 1995. ↑3
[24] Norman Ramsey. Literate programming simplified. *IEEE Software*, **11** (5):97–105, 1994. Noweb — A Simple, Extensible Tool for Literate Programming. URL: http://www.eecs.harvard.edu/~nr/noweb/. ↑21
[25] Hans Schwerdtfeger. *Geometry of complex numbers: Circle geometry, Moebius transformation, non-Euclidean geometry*. Dover Books on Advanced Mathematics. Dover Publications Inc., New York, 1979. A corrected reprinting of the 1962 edition. ↑3
[26] I. M. Yaglom. *A simple non-Euclidean geometry and its physical basis*. Heidelberg Science Library. Springer-Verlag, New York, 1979. Translated from the Russian by Abe Shenitzer, with the editorial assistance of Basil Gordon. ↑3

Appendix A. Examples of Usage

This section presents several examples, which may be used for quick start. We begin with very elementary one, but almost all aspects of the library usage will be illustrated by the end of this section. See the beginning of Section B for installation advise.

9a ⟨starting chunk 9a⟩≡

A.1. **Hello, Cycle!**

This is a minimalist example showing how to obtain a simple drawing of cycles in non-Euclidean geometry.

```
9b ⟨hello-cycle.cpp 9b⟩≡                                              9d ▷
     ⟨license 101⟩
     #include "figure.h"
     ⟨using all namespaces 9c⟩
     int main(){
```

Defines:
`main`, never used.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

We use the following **namespace**s.

```
9c ⟨using all namespaces 9c⟩≡                                  (9–12 17a 18a 20a)
     using namespace std;
     using namespace GiNaC;
     using namespace MoebInv;
```

Defines:
`MoebInv`, used in chunks 30c, 39c, and 40b.

We declare the figure F which will be constructed with the default elliptic metric in two dimensions.

```
9d ⟨hello-cycle.cpp 9b⟩+≡                                      ◁9b 9e ▷
       figure F;
```

Defines:
`figure`, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

Next we define a couple of points A and B. Every point is added to F by giving its explicit coordinates as a **lst** and a string, which will be used to label the point. The returned value is a GiNaC expression of **symbol** class, which will be used as a key of the respective point. All points are added to the zero generation.

```
9e ⟨hello-cycle.cpp 9b⟩+≡                                      ◁9d 9f ▷
       ex A=F.add_point(lst(-1,.5),"A");
       ex B=F.add_point(lst(1,1.5),"B");
```

Defines:
`add_point`, used in chunks 10b, 13d, and 66.
Uses `ex` 40c.

Now we add a "line" in the Lobachevsky half-plane. It passes both points A and B and is orthogonal to the real line. The real line and the point at infinity were automatically added to F at its initialisation. The real line is accessible as $F.get_real_line()$ method in **figure** class. A cycle passes a point if it is orthogonal to the cycle defined by this point. Thus, the line is defined through a list of three orthogonalities [16; 19, Defn. 6.1] (other pre-defined relations between cycles are listed in Section C). We also supply a string to label this cycle. The returned valued is a **symbol**, which is a key for this cycle.

```
9f ⟨hello-cycle.cpp 9b⟩+≡                                      ◁9e 9g ▷
       ex a=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(B),is_orthogonal(F.get_real_line())),"a");
```

Defines:
`add_cycle_rel`, used in chunks 10–12, 14, 15, 18–20, 69, 70a, 99, and 100a.
`get_real_line`, used in chunk 10b.
Uses `ex` 40c and `is_orthogonal` 13e 27a.

Now, we draw our figure to the PostScript file, it is shown at Figure 3.

```
9g ⟨hello-cycle.cpp 9b⟩+≡                                          ◁9f
       F.asy_write(300,-3,3,-3,3,"lobachevsky-line");
         return 0;
     }
```

Defines:
`asy_write`, used in chunks 12d, 16, and 19c.

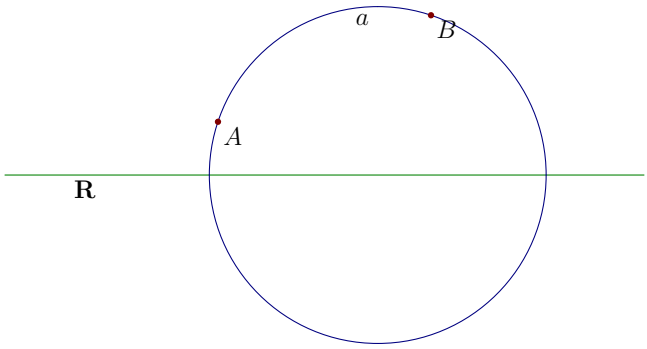

FIGURE 3. Lobachevky line.

A.2. **Animated cycle.** We use the similar construction to make an animation. It is preferable to *freeze* a figure with a symbolic parameter in order to avoid useless but expensive symbolic computations. It will be automatically *unfreeze* by *asy_animate* method.

10a ⟨hello-cycle-anim.cpp 10a⟩≡ 10b ▷

```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
    figure F=figure().freeze();
    symbol t("t");
```

Defines:
`freeze`, never used.
`main`, never used.
`unfreeze`, used in chunk 87d.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

This time the point A on the figure depends from the parameter t. The straight line b is defined as a cycle passing (orthogonal to) the point at infinity. It is accessible by *get_infinity* method.

10b ⟨hello-cycle-anim.cpp 10a⟩+≡ ◁ 10a 10c ▷

```
    ex A=F.add_point(lst(-1*t,.5*t+.5),"A");
    ex B=F.add_point(lst(1,1.5),"B");
    ex a=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(B),is_orthogonal(F.get_real_line())),"a");
    ex b=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(B),is_orthogonal(F.get_infinity())),"b");
```

Defines:
`get_infinity`, used in chunk 19b.
Uses `add_cycle_rel` 9f 13e 22c, `add_point` 9e 13b 22a, `ex` 40c, `get_real_line` 9f 37d, and `is_orthogonal` 13e 27a.

Now we define the set of values for the parameter t which will be used for substitution into the figure.

10c ⟨hello-cycle-anim.cpp 10a⟩+≡ ◁ 10b 10d ▷

```
    lst val;
    for (int i=0; i<40; ++i)
        val.append(t==numeric(i+2,30));
```

Uses `numeric` 12f.

Finally the animation is created similarly to the static picture.

10d ⟨hello-cycle-anim.cpp 10a⟩+≡ ◁ 10c

```
    F.asy_animate(val,500,-2.2,3,-2,2,"lobachevsky-anim","mng");
    return 0;
}
```

Defines:
`asy_animate`, never used.

A.3. **An illustration of the modular group action.** The library allows to build figures out of cycles which are obtained from each other by means of Möbius transformations. We are going to illustrate this by the action of the modular group $\mathrm{SL}_2(\mathbb{Z})$ on a single circle. We repeatedly apply Möbius transformations $T=\begin{pmatrix}1 & 1\\ 0 & 1\end{pmatrix}$ for translations and $S=\begin{pmatrix}0 & -1\\ 1 & 0\end{pmatrix}$ for the inversion in the unit circle.

Here is the standard start of a programme with some additional variables being initialised.

11a ⟨modular-group.cpp 11a⟩≡ 11b▷
```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
    char buffer[50];
    int steps=3, trans=3, i;
    figure F;
```
Defines:
`main`, never used.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

We will use the metric associated to the figure, it can be extracted by *get_point_metric* method.

11b ⟨modular-group.cpp 11a⟩+≡ ◁11a 11c▷
```
    ex e=F.get_point_metric();
```
Defines:
`get_point_metric`, used in chunk 62c.
Uses `ex` 40c.

Firstly, we add to the figure an initial cycle and, then, add new generations of its shifts and reflections.

11c ⟨modular-group.cpp 11a⟩+≡ ◁11b 12b▷
```
    ex a=F.add_cycle(cycle2D(lst(0,numeric(3,2)),e,numeric(1,4)),"a","~");
    ex c=F.add_cycle(cycle2D(lst(0,numeric(11,6)),e,numeric(1,36)),"c","~");
    for (i=0; i<steps;++i) {
        ⟨shifting the previous generation 11d⟩
```
Uses `add_cycle` 13c 22b, `ex` 40c, and `numeric` 12f.

We want to shift all cycles in the previous generation. Their key are grasped by *get_all_keys* method.

11d ⟨shifting the previous generation 11d⟩≡ (11c 12c) 11e▷
```
        lst L=ex_to<lst>(F.get_all_keys(2*i,2*i));
```
Defines:
`get_all_keys`, used in chunks 12b and 83c.

Each cycle with the collected key is shifting horizontally by an integer t in range $[-trans,trans]$. This done by *moebius_transform* relations and it is our responsibility to produce proper Clifford-valued entries to the matrix, see [18, § 2.1] for an advise.

11e ⟨shifting the previous generation 11d⟩+≡ (11c 12c) ◁11d 12a▷
```
        for (const auto& k: L) {
            for (int t=-trans; t<=trans;++t) {
                sprintf (buffer, "%s-%dt%d",ex_to<symbol>(k).get_name().c_str(),i,t);
                if (t!=0 ∨ i≡0 ) {
                    ex b=F.add_cycle_rel(moebius_transform(k,true,
                                    lst(dirac_ONE(),t*e.subs(e.op(1).op(0)≡0),0,dirac_ONE())),buffer,"~");
```
Defines:
`moebius_transform`, never used.
Uses `add_cycle_rel` 9f 13e 22c, `ex` 40c, `k` 38g, `op` 37f, and `subs` 37f.

We want the colour of a cycle reflect its generation, smaller cycles also need to be drawn by a finer pen. This can be set for each cycle by *set_asy_style* method.

12a ⟨shifting the previous generation 11d⟩+≡ (11c 12c) ◁11e

```
        sprintf(buffer, "rgb(0,0,%.2f)+%.3f",1-1÷(i+1.),1÷(i+1.5));
        F.set_asy_style(b,buffer);
      }
    }
  }
```

Defines:
rgb, used in chunks 12b, 14, 15, 18, 19b, 25, and 26a.
set_asy_style, used in chunks 12b, 14, 15, 18, and 19b.

Similarly, we collect all key from the previous generation cycles and make their reflection in the unit circle. This tame we keep things simple and are using *sl2_transform* relation, all Clifford algebra adjustments are taken by the library. The drawing style is setup accordingly.

12b ⟨modular-group.cpp 11a⟩+≡ ◁11c 12c▷

```
  lst L1=ex_to<lst>(F.get_all_keys(2*i+1,2*i+1));
  for (const auto& k: L1) {
    sprintf(buffer, "%ss",ex_to<symbol>(k).get_name().c_str());
    ex b=F.add_cycle_rel(sl2_transform(k,true,lst(0,-1,1,0)),buffer,"~");
    sprintf(buffer, "rgb(0,0.7,%.2f)+%.3f",1-1÷(i+1.),1÷(i+1.5));
    F.set_asy_style(b,buffer);
  }
}
```

Defines:
sl2_transform, never used.
Uses add_cycle_rel 9f 13e 22c, ex 40c, get_all_keys 11d 23b, k 38g, rgb 12a 13f, and set_asy_style 12a 13f 26d.

12c ⟨modular-group.cpp 11a⟩+≡ ◁12b 12d▷

```
  ⟨shifting the previous generation 11d⟩
```

12d ⟨modular-group.cpp 11a⟩+≡ ◁12c

```
  ex u=F.add_cycle(cycle2D(lst(0,0),e,numeric(1)),"u","~");
  F.asy_write(300,-2.17,2.17,0,2,"modular-group");
  return 0;
}
```

Uses add_cycle 13c 22b, asy_write 9g 15f 25c 25c 86d, ex 40c, and numeric 12f.

A.4. **The nine-points theorem—conformal version.** Here we present further usage of the library by an aesthetically attractive example.
The start of our file is minimalistic, we definitely need to include the header of **figure** library.

12e ⟨nine-points-thm.cpp 12e⟩≡ (16f) 15c▷

```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
  ⟨initial data for drawing 12f⟩
  ⟨build mediosribed cycle 12g⟩
```

Defines:
main, never used.
Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

We define exact coordinates of points which will be used for our picture.

12f ⟨initial data for drawing 12f⟩≡ (12e)

```
  numeric x1(-10,10), y1(0,1), x2(10,10), y2(0,1), x3(-1,5), y3(-3,2), x4(1,2), y4(-5,2);
  int sign=-1;
```

Defines:
numeric, used in chunks 10–13, 16, 18, 20b, 28g, 29a, 46a, 61, 63b, 64e, 67a, 71, 73c, 76–78, 82b, 86a, and 95–97.

We declare the figure F which will be constructed.

12g ⟨build mediosribed cycle 12g⟩≡ (12e 17a) 13a▷

```
  figure F(lst(-1,sign));
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

We will need several "midpoints" in our constructions, the corresponding figure *midpoint_constructor* is readily available from the library.

13a ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁12g 13b▷
```
figure SF=ex_to<figure>(midpoint_constructor());
```
Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d and midpoint_constructor 29d 99b.

Next we define vertices of the "triangle" A, B, C and the point N which will be an image if infinity. Every point is added to F by giving its explicit coordinates and a string, which will used to label it. The returned value is a GiNaC expression of **symbol** class which will be used as the key of a respective point. All points are added to the zero generation.

13b ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13a 13c▷
```
ex A=F.add_point(lst(x1,y1),"A");
ex B=F.add_point(lst(x2, y2),"B");
ex C=F.add_point(lst(x3,y3),"C");
```
Defines:
add_point, used in chunks 10b, 13d, and 66.
Uses ex 40c.

There is the special point in the construction, which play the role of infinity. We first put this as cycle at infinity to make picture simple.

13c ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13b 13d▷
```
ex N=F.add_cycle(cycle_data(0,lst(0,0),1),"N");
```
Defines:
add_cycle, used in chunks 11c, 12d, 18b, 20b, 67d, 68a, and 99b.
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
Uses ex 40c.

This is an alternative selection of point with N being at the centre of the triangle.

13d ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13c 13e▷
```
//Fully symmetric data
// ex A=F.add_point(lst(-numeric(10,10),numeric(0,1)),"A")
// ex B=F.add_point(lst(numeric(10,10),numeric(0,1)),"B")
// ex C=F.add_point(lst(numeric(0,4),-numeric(1732050807,1000000000)),"C")
// ex N=F.add_point(lst(numeric(0,4),-numeric(577350269,1000000000)),"N")
```
Uses add_point 9e 13b 22a, ex 40c, and numeric 12f.

Now we add "sides" of the triangle, that is cycles passing two vertices and N. A cycle passes a point if it is orthogonal to the cycle defined by this point. Thus, each side is defined through a list of three orthogonalities [16; 19, Defn. 6.1]. We also supply a string to label this side. The returned valued is a **symbol** which is a key for this cycle.

13e ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13d 13f▷
```
ex a=F.add_cycle_rel(lst(is_orthogonal(B),is_orthogonal(C),is_orthogonal(N)),"a");
ex b=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(C),is_orthogonal(N)),"b");
ex c=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(B),is_orthogonal(N)),"c");
```
Defines:
add_cycle_rel, used in chunks 10–12, 14, 15, 18–20, 69, 70a, 99, and 100a.
is_orthogonal, used in chunks 9f, 10b, 14, 18d, 19b, 35e, and 94c.
Uses ex 40c.

We define the custom `Asymptote` [14] drawing style for sides of the triangle: the dark blue (*rgb* colour (0,0,0.8)) and line thickness 1pt.

13f ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13e 14a▷
```
F.set_asy_style(a,"rgb(0,0,.8)+1");
F.set_asy_style(b,"rgb(0,0,.8)+1");
F.set_asy_style(c,"rgb(0,0,.8)+1");
```
Defines:
rgb, used in chunks 12b, 14, 15, 18, 19b, 25, and 26a.
set_asy_style, used in chunks 12b, 14, 15, 18, and 19b.

Now we drop "altitudes" in our triangle, that is again provided through three orthogonality relations. They will be draw as dashed lines.

14a ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁13f 14b▷
```
ex ha=F.add_cycle_rel(lst(is_orthogonal(A),is_orthogonal(N),is_orthogonal(a)),"h_a");
F.set_asy_style(ha,"dashed");
ex hb=F.add_cycle_rel(lst(is_orthogonal(B),is_orthogonal(N),is_orthogonal(b)),"h_b");
F.set_asy_style(hb,"dashed");
ex hc=F.add_cycle_rel(lst(is_orthogonal(C),is_orthogonal(N),is_orthogonal(c)),"h_c");
F.set_asy_style(hc,"dashed");
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, is_orthogonal 13e 27a, and set_asy_style 12a 13f 26d.

We need the base of altitude *ha*, which is the intersection points of the side *a* and respective altitude *ha*. A point can be can be characterised as a cycle which is orthogonal to itself [16; 19, Defn. 5.13]. To define a relation of a cycle to itself we first need to define a symbol *A1* and then add a cycle with the key *A1* and the relation *is_orthogonal* to *A1*. Finally, there are two such points: the base of altitude and *N*. To exclude the second one we add the relation *is_adifferent* ("almost different") to *N*.

14b ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14a 14c▷
```
ex A1=symbol("A_h");
F.add_cycle_rel(lst(is_orthogonal(a),is_orthogonal(ha),is_orthogonal(A1),is_adifferent(N)),A1);
```

Defines:
is_adifferent, used in chunk 14.
Uses add_cycle_rel 9f 13e 22c, ex 40c, and is_orthogonal 13e 27a.

Two other bases of altitude is defined in a similar manner.

14c ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14b 14d▷
```
ex B1=symbol("B_h");
F.add_cycle_rel(lst(is_orthogonal(b),is_orthogonal(hb),is_adifferent(N),is_orthogonal(B1)),B1);
ex C1=symbol("C_h");
F.add_cycle_rel(lst(is_adifferent(N),is_orthogonal(c),is_orthogonal(hc),is_orthogonal(C1)),C1);
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, is_adifferent 14b 27d, and is_orthogonal 13e 27a.

We add the cycle passing all three bases of altitudes.

14d ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14c 14e▷
```
ex p=F.add_cycle_rel(lst(is_orthogonal(A1),is_orthogonal(B1),is_orthogonal(C1)),"p");
F.set_asy_style(p,"rgb(0,.8,0)+1");
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, is_orthogonal 13e 27a, rgb 12a 13f, and set_asy_style 12a 13f 26d.

We build "midpoint" of the arc of *a* between *B* and *C*. To this end we use subfigure *SF* and supply the list of parameters *B*, *C* and *N* ("infinity") which are required by *SF*.

14e ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14d 14f▷
```
ex A2=F.add_subfigure(SF,lst(B,C,N),"A_m");
```

Defines:
add_subfigure, used in chunks 14f, 15a, and 70.
Uses ex 40c.

Similarly we build other two "mispoints", they all will belong to the cycle *p*.

14f ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14e 14g▷
```
ex B2=F.add_subfigure(SF,lst(C,A,N),"B_m");
ex C2=F.add_subfigure(SF,lst(A,B,N),"C_m");
```

Uses add_subfigure 14e 22d and ex 40c.

O is the intersection point of altitudes *ha* and *hb*, again it is defined as a cycle with key *O* orthogonal to itself.

14g ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14f 15a▷
```
ex O=symbol("O");
F.add_cycle_rel(lst(is_orthogonal(ha),is_orthogonal(hb),is_orthogonal(O),is_adifferent(N)),O);
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, is_adifferent 14b 27d, and is_orthogonal 13e 27a.

We build three more "midpoints" which belong to p as well.

15a ⟨build medioscribed cycle 12g⟩+≡ (12e 17a) ◁14g

```
ex A3=F.add_subfigure(SF,lst(O,A,N),"A_d");
ex B3=F.add_subfigure(SF,lst(B,O,N),"B_d");
ex C3=F.add_subfigure(SF,lst(C,O,N),"C_d");

⟨check the theorem 15b⟩
```

Uses add_subfigure 14e 22d and ex 40c.

Now we want to check that the six additional points all belong to the build cycle p. The list of pre-defined conditions which may be checked is listed in Section B.4.

15b ⟨check the theorem 15b⟩≡ (15 16)

```
cout << "Midpoint BC belongs to the cycle: " <<  F.check_rel(p,A2,cycle_orthogonal) << endl;
cout << "Midpoint AC belongs to the cycle: " <<  F.check_rel(p,B2,cycle_orthogonal) << endl;
cout << "Midpoint AB belongs to the cycle: " <<  F.check_rel(p,C2,cycle_orthogonal) << endl;
cout << "Midpoint OA belongs to the cycle: " << F.check_rel(p,A3,cycle_orthogonal) << endl;
cout << "Midpoint OB belongs to the cycle: " <<  F.check_rel(p,B3,cycle_orthogonal) << endl;
cout << "Midpoint OC belongs to the cycle: " <<  F.check_rel(p,C3,cycle_orthogonal) << endl;
```

Defines:
check_rel, used in chunk 15e.
Uses cycle_orthogonal 23d 94c.

We inscribe the cycle va into the triangle through the relation $is_tangent_i$ (that is "tangent from inside") and $is_tangent_$ (that is "tangent from outside")to sides of the triangle. We also provide custom Asymptote drawing style: dar red colour and line thickness 0.5pt.

15c ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁12e 15d▷

```
ex va=F.add_cycle_rel(lst(is_tangent_o(a),is_tangent_i(b),is_tangent_i(c)),"v_a");
F.set_asy_style(va,"rgb(0.8,0,0)+.5");
```

Defines:
is_tangent_i, used in chunks 15d and 19b.
is_tangent_o, used in chunk 15d.
Uses add_cycle_rel 9f 13e 22c, ex 40c, rgb 12a 13f, and set_asy_style 12a 13f 26d.

Similarly we define two other tangent cycles: touching two sides from inside and the third from outside (the relation $is_tangent_o$). We also define custom Asymptote styles for the new cycles.

15d ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁15c 15f▷

```
ex vb=F.add_cycle_rel(lst(is_tangent_i(a),is_tangent_o(b),is_tangent_i(c)),"v_b");
F.set_asy_style(vb,"rgb(0.8,0,0)+.5");
ex vc=F.add_cycle_rel(lst(is_tangent_i(a),is_tangent_i(b),is_tangent_o(c)),"v_c");
F.set_asy_style(vc,"rgb(0.8,0,0)+.5");
⟨check that cycles are tangent 15e⟩
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, is_tangent_i 15c 28b, is_tangent_o 15c 28b, rgb 12a 13f, and set_asy_style 12a 13f 26d.

We also want to check the touching property between cycles:

15e ⟨check that cycles are tangent 15e⟩≡ (15 16)

```
cout << "p and va are tangent: " <<  F.check_rel(p,va,check_tangent).evalf() << endl;
cout << "p and vb are tangent: " <<  F.check_rel(p,vb,check_tangent).evalf() << endl;
cout << "p and vc are tangent: " <<  F.check_rel(p,vc,check_tangent).evalf() << endl;
```

Uses check_rel 15b 23c 92b, check_tangent 23f 95b, and evalf 37f.

Now, we draw our figure to the PostScript file, it is shown at Figure 2.

15f ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁15d 16a▷

```
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm-plain");
F.asy_write(600,-3.1,2.4,-3.6,1.3,"nine-points-thm-plain","png");
```

Defines:
asy_write, used in chunks 12d, 16, and 19c.

We also can modify a cycle at zero level by *move_point*. This time we restore the initial value of N as a debug check: this is a transition from a pre-defined **cycle** given above to a point (which is a calculated object due to the internal representation).

16a ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁15f 16b▷

```
F.move_point(N,lst(numeric(1,2),-numeric(5,2)));
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm");
F.asy_write(600,-3.1,2.4,-3.6,1.3,"nine-points-thm", "png");
⟨check the theorem 15b⟩
⟨check that cycles are tangent 15e⟩
```

Defines:
move_point, used in chunks 16, 71a, and 72a.
Uses asy_write 9g 15f 25c 25c 86d and numeric 12f.

And now we use *move_point* to change coordinates of the point (without a change of its type).

16b ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁16a 16c▷

```
F.move_point(N,lst(numeric(4,2),-numeric(5,2)));
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm2");
⟨check the theorem 15b⟩
⟨check that cycles are tangent 15e⟩
```

Uses asy_write 9g 15f 25c 25c 86d, move_point 16a 22e, and numeric 12f.

Then, we move the cycle N to represent the point at infinity (0,**lst**(0,0),1), thus the drawing becomes the classical Nine Points Theorem in Euclidean geometry.

16c ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁16b 16d▷

```
F.move_cycle(N, cycle_data(0,lst(0,0),1));
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm1");
⟨check the theorem 15b⟩
⟨check that cycles are tangent 15e⟩
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
move_cycle, used in chunk 16d.
Uses asy_write 9g 15f 25c 25c 86d.

We can draw the same figures in the hyperbolic metric as well. The checks show that the nine-point theorem is still valid!

16d ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁16c 16e▷

```
F.move_cycle(N, cycle_data(0,lst(0,0),1));
F.set_metric(diag_matrix(lst(-1,1)));
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm-plain-hyp");
⟨check the theorem 15b⟩
⟨check that cycles are tangent 15e⟩
F.move_point(N,lst(numeric(1,2),-numeric(5,2)));
F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm-hyp");
F.asy_write(600,-3.1,2.4,-3.6,1.3,"nine-points-thm-hyp","png");
⟨check the theorem 15b⟩
⟨check that cycles are tangent 15e⟩
//F.set_metric(diag_matrix(lst(-1,0)));
//F.asy_write(300,-3.1,2.4,-3.6,1.3,"nine-points-thm-par");
```

Uses asy_write 9g 15f 25c 25c 86d, cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, move_cycle 16c 22f 68c, move_point 16a 22e, numeric 12f, and set_metric 21b.

We produce an illustration of *SF* in the canonical position. Everything is done now.

16e ⟨nine-points-thm.cpp 12e⟩+≡ (16f) ◁16d

```
  return 0;
}
```

16f ⟨* 16f⟩≡
⟨nine-points-thm.cpp 12e⟩

A.5. **Proving the theorem: Symbolic computations.**

17a ⟨nine-points-thm-symb.cpp 17a⟩≡ 17d ▷

```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
    cout ≪ "Prooving the theorem, this shall take a long time..."
        ≪ endl;
    ⟨initial data for proof 17b⟩
    ⟨build medioscribed cycle 12g⟩
```

Defines:
`main`, never used.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

We define variables from **realsymbol** class to be used in symbolic computations.

17b ⟨initial data for proof 17b⟩≡ (17a) 17c ▷

```
realsymbol x1("x1"), y1("y1"), x2("x2"), y2("y2"), x3("x3"), y3("y3"), x4("x4"), y4("y4");
```

Defines:
`realsymbol`, used in chunks 18d, 20c, 61, 64, 65, and 79c.

We also define the sign for the hyperbolic metric. The proof will work in the elliptic (conformal Euclidean) space as well, however we have synthetic poofs in this case. Symbolic computations in the hyperbolic space are mathematically sufficient for demonstration, but Figure 2 from the previous subsection is physiologically more convincing on the individual level. A synthetic proof for hyperbolic space would be interesting to obtain as well.

17c ⟨initial data for proof 17b⟩+≡ (17a) ◁ 17b

```
int sign=1;
```

We got the output, which make a full demonstration that the theorem holds in the hyperbolic space as well:

```
Midpoint BC belongs to the cycle {0==0}
Midpoint AC belongs to the cycle {0==0}
Midpoint AB belongs to the cycle {0==0}
Midpoint OA belongs to the cycle {0==0}
Midpoint OB belongs to the cycle {0==0}
Midpoint OC belongs to the cycle {0==0}
```

But be prepared, that that will take a long time (about 6 hours of CPU time of my slow PC).

17d ⟨nine-points-thm-symb.cpp 17a⟩+≡ ◁ 17a

```
    return 0;
}
```

A.6. **Numerical relations.** To illustrate the usage of relations with numerical parameters we are solving the following problem from [9, Problem A]:

Find the cycles having (all three conditions):

- tangential distance 7 from the circle
$$(u-7)^2+(v-1)^2=2^2;$$
- angle $\arccos\frac{4}{5}$ with the circle
$$(u-5)^2+(v-3)^2=5^2;$$
- centres lying on the line
$$\frac{5}{13}u+\frac{12}{13}v=0.$$

The statement of the problem uses orientation of cycles. Geometrically it is given by the inward or outward direction of the normal. In our library the orientation represented by the direction of the vector in the projective space, it changes to the opposite if the vector is multiplied by -1.
The start of of our code is similar to the previous one.

18a ⟨fillmore-springer-example.cpp 18a⟩≡ 18b ▷
```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
  ex sign=-numeric(1);
  varidx nu(symbol("nu", "\\nu"), 2);
  ex e = clifford_unit(nu, diag_matrix(lst(-numeric(1),sign)));
  figure F(e);
```

Defines:
main, never used.
Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and numeric 12f.

Now we define three circles given in the problem statement above.

18b ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁18a 18c ▷
```
  ex A=F.add_cycle(cycle(lst(numeric(7),numeric(1)),e,numeric(4)),"A");
  ex B=F.add_cycle(cycle(lst(numeric(5),numeric(3)),e,numeric(25)),"B");
  ex C=F.add_cycle(cycle(numeric(0),lst(numeric(5,13),numeric(12,13)),0,e),"C");
```

Uses add_cycle 13c 22b, ex 40c, and numeric 12f.

All given data will be drawn in black inc.

18c ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁18b 18d ▷
```
  F.set_asy_style(A,"rgb(0,0,0)");
  F.set_asy_style(B,"rgb(0,0,0)");
  F.set_asy_style(C,"rgb(0,0,0)");
```

Uses rgb 12a 13f and set_asy_style 12a 13f 26d.

The solution D is a circle defined by the three above conditions. The solution will be drawn in red.

18d ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁18c 19a ▷
```
  realsymbol D("D"), T("T");
  F.add_cycle_rel(lst(tangential_distance(A,true,numeric(7)), // The tangential distance to A is 7
                      make_angle(B,true,numeric(4,5)), // The angle with B is arccos(4/5)
                      is_orthogonal(C), // If the centre is on C, then C and D are orthogonal
                  is_real_cycle(D)), D); // We require D be a real circle, as there are two imaginary solutions as well
  F.set_asy_style(D,"rgb(0.7,0,0)");
```

Defines:
is_real_cycle, never used.
make_angle, never used.
tangential_distance, never used.
Uses add_cycle_rel 9f 13e 22c, is_orthogonal 13e 27a, numeric 12f, realsymbol 17b, rgb 12a 13f, and set_asy_style 12a 13f 26d.

The output tells parameters of two solutions:

```
Solutions: {(-1.0, [0,0]~D, 0.99999999999999999734),
(-0.006944444444444444444, [-0.089285714285714285705,0.037202380952380952383]~D, -1.0)}
```

Here, as in **cycle** library, the set of four numbers $(k,[l,n],m)$ represent the circle equation $k(u^2+v^2)-2lu-2nv+m=0$.

19a ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁18d 19b▷

```
cout ≪ "Solutions: "≪ F.get_cycle(D).evalf() ≪ endl;
```

Uses evalf 37f and get_cycle 24g 24h.

To visualise the tangential distances we may add the joint tangent lines to the figure. Some solutions are lines with imaginary coefficients, to avoid them we use *only_reals* condition. The tangents will be drawn in blue inc.

19b ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁19a 19c▷

```
F.add_cycle_rel(lst(is_tangent_i(D),is_tangent_i(A),is_orthogonal(F.get_infinity()),only_reals(T)),T);
F.set_asy_style(T,"rgb(0,0,0.7)");
```

Defines:
only_reals, never used.
Uses add_cycle_rel 9f 13e 22c, get_infinity 10b 37d, is_orthogonal 13e 27a, is_tangent_i 15c 28b, rgb 12a 13f, and set_asy_style 12a 13f 26d.

Finally we draw the picture, see Fig. 4, which shall be compared with [9, Fig. 1].

19c ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁19b 19d▷

```
F.asy_write(400,-4,20,-12.5,9,"fillmore-springer-example");
```

Uses asy_write 9g 15f 25c 25c 86d.

Out of curiosity we may want to know that is square of tangents intervals which are separate circles A, D. The output is:

```
Sq. cross tangent distance: {41.000000000000000003,-7.571428571428571435}
```

Thus one solution does have such tangents with length $\sqrt{41}$, and for the second solution such tangents are imaginary since the square is negative. This happens because one solution D intersects A.

19d ⟨fillmore-springer-example.cpp 18a⟩+≡ ◁19c

```
    cout ≪ "Sq. cross tangent distance: " ≪ F.measure(D,A,sq_cross_t_distance_is).evalf() ≪ endl;
    return 0;
}
```

Defines:
measure, never used.
sq_cross_t_distance_is, never used.
Uses evalf 37f.

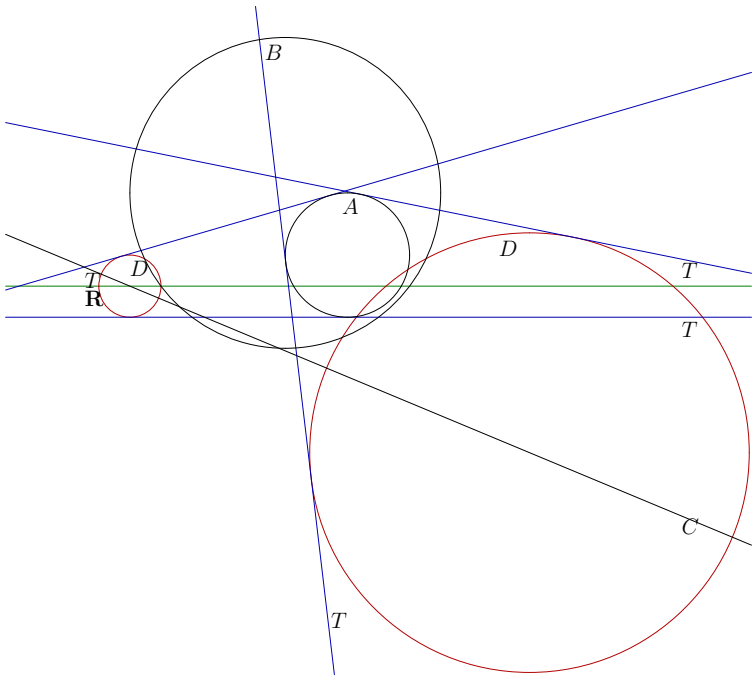

FIGURE 4. The illustration to Fillmore–Springer example, cf. [9, Fig. 1].

A.7. **An example of calculations in three dimensions.** The most of the library functionality (except graphical methods) is literally preserved for quadrics in arbitrary dimensions. We demonstrate this on the following stereometric problem of Apollonius type, cf. [9, § 8]. Let four spheres of equal radii R have centres at four points $(1,1,1)$, $(-1,-1,1)$, $(-1,1,-1)$, $(1,-1,-1)$. These points are vertices of a regular tetrahedron and are every other vertices of a cube with the diagonal $2\sqrt{3}$.

There are two obvious spheres with the centre at the origin $(0,0,0)$ touching all four given spheres, they have radii $R+\sqrt{3}$ and $\sqrt{3}-R$. Are there any others?

We start from the standard initiation and define the metric of three dimensional Euclidean space.

20a ⟨3D-figure-example.cpp 20a⟩≡ 20b ▷

```
⟨license 101⟩
#include "figure.h"
⟨using all namespaces 9c⟩
int main(){
    ex e3D = clifford_unit(varidx(symbol("lam"), 3), diag_matrix(lst(-1,-1,-1))); // Metric for 3D space
    possymbol R("R");
    figure F(e3D);
```

Defines:
`main`, never used.
Uses `ex` 40c and `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

Then we put four given spheres to the figure. They are defined by their centres and square of radii.

20b ⟨3D-figure-example.cpp 20a⟩+≡ ◁20a 20c ▷

```
    /* Numerical radii */
    ÷* ex P1=F.add_cycle(cycle(lst(1,1,1), e3D, numeric(3,4)), "P1");
    ex P2=F.add_cycle(cycle(lst(-1,-1,1), e3D, numeric(3,4)), "P2");
    ex P3=F.add_cycle(cycle(lst(1,-1,-1), e3D, numeric(3,4)), "P3");
    ex P4=F.add_cycle(cycle(lst(-1,1,-1), e3D, numeric(3,4)), "P4");
    *÷
    ex P1=F.add_cycle(cycle(lst(1,1,1), e3D, pow(R,2)), "P1");
    ex P2=F.add_cycle(cycle(lst(-1,-1,1), e3D, pow(R,2)), "P2");
    ex P3=F.add_cycle(cycle(lst(1,-1,-1), e3D, pow(R,2)), "P3");
    ex P4=F.add_cycle(cycle(lst(-1,1,-1), e3D, pow(R,2)), "P4");
```

Uses `add_cycle` 13c 22b, `ex` 40c, and `numeric` 12f.

Then we introduce the unknown cycle by the four tangency conditions to given spheres. We also put two conditions to rule out non-geometric solutions: *is_real_cycle* checks that the radius is real, *only_reals* requires that all coefficients are real.

20c ⟨3D-figure-example.cpp 20a⟩+≡ ◁20b 20d ▷

```
    realsymbol N3("N3");
    F.add_cycle_rel(lst(is_tangent(P1), is_tangent(P2), is_tangent(P3),is_tangent(P4)
                        /* Tests below forbid all spheres with symbolic parameters */
                        //, only_reals(N3), is_real_cycle(N3)
                        ), N3);
```

Defines:
`is_real_cycle`, never used.
`is_tangent`, never used.
`only_reals`, never used.
Uses `add_cycle_rel` 9f 13e 22c and `realsymbol` 17b.

Then we output the solutions and their radii.

20d ⟨3D-figure-example.cpp 20a⟩+≡ ◁20c

```
    lst L=ex_to<lst>(F.get_cycle(N3));
    cout << L.nops() << " spheres found" << endl;
    for (unsigned int i=0; i< L.nops(); ++i)
        cout << "Cycle: " << L.op(i).normal()
         << ", radius sq: " << (ex_to<cycle>(L.op(i)).det()).normal()
         <<endl;
    return 0;
}
```

Uses `get_cycle` 24g 24h, `nops` 37f, and `op` 37f.

For the numerical value $R = \frac{\sqrt{3}}{2}$, the program found 16 different solutions which satisfy to *is_real_cycle* and *only_reals* conditions. If we omit these conditions then additional 16 imaginary spheres will be producing (32 in total).

For the symbolic radii R again 32 different spheres are found. The condition *only_reals* leaves only two obvious spheres, discussed at the beginning of the subsection. This happens because for some value of R coefficient of other spheres may turn to be complex. Finally, if we use the condition *is_real_cycle*, then no sphere passes it—the square of its radius may become negative for some R.

Appendix B. Public Methods in the **figure** class

This section lists all methods, which may be of interest to an end-user. An advanced user may find further advise in Appendix E, which outlines the library header file. Methods presented here are grouped by their purpose.

The source (interleaved with documentation in a `noweb` file) can be found at SourceForge project page [22] as Git tree. The code is written using `noweb` literate programming tool [24]. The code uses some C++11 features, e.g. regeps and *std*::*function*. Drawing procedures delegate to `Asymptote` [14].

The stable realises and full documentation are in Files section of the project. A release archive contain all C++ files extracted from the `noweb` source, thus only the standard C++ compiler is necessary to use them.

Furthermore, a live CD with the compiled library, examples and all required tools is distributed as an ISO image. You may find a link to the ISO image at the start of this Web page:

http://www.maths.leeds.ac.uk/~kisilv/courses/using_sw.html

It also explains how to use the live CD image either to boot your computer or inside a Virtual Machine.

B.1. **Creation and re-setting of figure, changing** *metric*. Here are methods to initialise **figure** and manipulate its basic property.

This is the simplest constructor of an initial figure with the (point) metric *Mp*. By default, any figure contains the *real_line* and *infinity*. Parameter *M*, may be same as for definition of *clifford_unit* in GiNaC, that is, be represented by a square **matrix**, **clifford** or **indexed** class object. If the metric *Mp* is not provided, then the default elliptic metric in two dimensions is used, it is given by the matrix $\begin{pmatrix} -1 & 0 \\ 0 & -1 \end{pmatrix}$.

An advanced user may wish to specify a different metric for point and cycle spaces, see [19, § 4.2] for the discussion. By default, if the metric in the point space is $\begin{pmatrix} -1 & 0 \\ 0 & \sigma \end{pmatrix}$ then the metric of cycle space is:

$$\begin{pmatrix} -1 & 0 \\ 0 & -\chi(-\sigma) \end{pmatrix}, \qquad \text{where} \quad \chi(t) = \begin{cases} 1, & t \geq 0; \\ -1, & t < 0. \end{cases} \tag{13}$$

is the *Heaviside function* $\chi(\sigma)$ In other word, by default for elliptic and parabolic point space the cycle space has the same metric and for the parabolic point space the cycle space is elliptic. If a user want a different combination then the following constructor need to be used, see also *set_metric*() below

21a ⟨public methods in figure class 21a⟩≡ (37c) 21b▷
```
figure(const ex & Mp, const ex & Mc=0);
```
Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c.

The metrics set in the above constructor can be changed at any stage, and all cycles will be re-calculated in the figure accordingly. The parameter *Mp* can be the same type of object as in the first constructor **figure**(**const ex** &). The first form change the point space metric and derive respective cycle space metric as described above. In the second form both metrics are provided explicitly.

21b ⟨public methods in figure class 21a⟩+≡ (37c) ◁21a 21c▷
```
void set_metric(const ex & Mp, const ex & Mc=0);
```
Defines:
set_metric, used in chunks 16d, 82a, and 83a.
Uses ex 40c.

This constructor can be used to create a figure with the pre-defined collection *N* of cycles.

21c ⟨public methods in figure class 21a⟩+≡ (37c) ◁21b 21d▷
```
figure(const ex & Mp, const ex & Mc, const exhashmap<cycle_node> & N);
```
Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and ex 40c.

Remove all **cycle_node** from the figure. Only the *point_metric*, *cycle_metric*, *real_line* and *infinity* are preserved.

21d ⟨public methods in figure class 21a⟩+≡ (37c) ◁21c 22a▷
```
void reset_figure();
```
Defines:
reset_figure, used in chunk 83e.

B.2. **Adding elements to figure.** This method add points to the figure. A point is represented as cycles with radius 0 (with respect to the cycle metric) and coordinates $x = (x_1, \dots, x_n)$ of their centre (represented by a **lst** of the suitable length). The procedure returns a symbol, which can be used later to refer this point. In the first form parameters *name* and (optional) *TeXname* provide respective string to name this new symbol. In the second form the whole symbol *key* is provided (and it will be returned by the procedure).

22a ⟨public methods in figure class 21a⟩+≡ (37c) ◁21d 22b▷
```
ex add_point(const ex & x, string name, string TeXname="");
ex add_point(const ex & x, const ex & key);
```
Defines:
`add_point`, used in chunks 10b, 13d, and 66.
`key`, used in chunks 22, 26–29, 33e, 36–38, 66–73, 80–83, and 98a.
`name`, used in chunks 22, 23a, 25c, 26a, 64e, 66–70, 82a, 84d, 86–88, and 94a.
`TeXname`, used in chunks 22, 66c, 68–70, and 94a.
Uses `ex` 40c.

This method add a cycle at zero generation without parents. The returned value and parameters *name*, *TeXname* and *key* are as in the previous methods *add_point*().

22b ⟨public methods in figure class 21a⟩+≡ (37c) ◁22a 22c▷
```
ex add_cycle(const ex & C, string name, string TeXname="");
ex add_cycle(const ex & C, const ex & key);
```
Defines:
`add_cycle`, used in chunks 11c, 12d, 18b, 20b, 67d, 68a, and 99b.
Uses `ex` 40c, `key` 22a, `name` 22a, and `TeXname` 22a.

Add a new node by a set *rel* of relations. The returned value and parameters *name*, *TeXname* and *key* are as in methods *add_point*().

22c ⟨public methods in figure class 21a⟩+≡ (37c) ◁22b 22d▷
```
ex add_cycle_rel(const lst & rel, string name, string TeXname="");
ex add_cycle_rel(const lst & rel, const ex & key);
ex add_cycle_rel(const ex & rel, string name, string TeXname="");
ex add_cycle_rel(const ex & rel, const ex & key);
```
Defines:
`add_cycle_rel`, used in chunks 10–12, 14, 15, 18–20, 69, 70a, 99, and 100a.
Uses `ex` 40c, `key` 22a, `name` 22a, and `TeXname` 22a.

Add a new cycle as the result of certain subfigure F. The list L provides nodes from the present figure, which shall be substituted to the zero generation of F. See *midpoint_constructor*() for an example, how subfigure shall be defined, The returned value and parameters *name*, *TeXname* and *key* are as in methods *add_point*().

22d ⟨public methods in figure class 21a⟩+≡ (37c) ◁22c 22e▷
```
ex add_subfigure(const ex & F, const lst & L, string name, string TeXname="");
ex add_subfigure(const ex & F, const lst & L, const ex & key);
```
Defines:
`add_subfigure`, used in chunks 14f, 15a, and 70.
Uses `ex` 40c, `key` 22a, `name` 22a, and `TeXname` 22a.

B.3. **Modification, deletion and searches of nodes.** This method modifies a node created by *add_point*() by moving the centre to new coordinates $x = (x_1, \dots, x_n)$ (represented by a **lst** of the suitable length).

22e ⟨public methods in figure class 21a⟩+≡ (37c) ◁22d 22f▷
```
void move_point(const ex & key, const ex & x);
```
Defines:
`move_point`, used in chunks 16, 71a, and 72a.
Uses `ex` 40c and `key` 22a.

This method replaced a node referred by *key* with the value of a cycle C. This can be applied to a node without parents only.

22f ⟨public methods in figure class 21a⟩+≡ (37c) ◁22e 22g▷
```
void move_cycle(const ex & key, const ex & C);
```
Defines:
`move_cycle`, used in chunk 16d.
Uses `ex` 40c and `key` 22a.

Remove a node given *key* and all its children and grand children in all generations

22g ⟨public methods in figure class 21a⟩+≡ (37c) ◁22f 23a▷
```
void remove_cycle_node(const ex & key);
```
Defines:
`remove_cycle_node`, used in chunk 72c.
Uses `ex` 40c and `key` 22a.

Return the label for **cycle_node** with the first matching name. If the name is not found, the zero expression is returned.

23a ⟨public methods in figure class 21a⟩+≡ (37c) ◁22g 23b▷
ex *get_cycle_label*(*string name*) **const**;

Defines:
`get_cycle_label`, used in chunks 82a and 84d.
Uses `ex` 40c and `name` 22a.

Finally, we provide the method to obtain the **lst** of keys for all nodes in generations between *mingen* and *maxgen* inclusively. The default value *GHOST_GEN* of *maxgen* removes the check of the upper bound. Thus, the call of the method with the default values produce the list of all key except the ghost generation.

23b ⟨public methods in figure class 21a⟩+≡ (37c) ◁23a 23c▷
ex *get_all_keys*(**const int** *mingen* = *GHOST_GEN*+1, **const int** *maxgen* = *GHOST_GEN*) **const**;

Defines:
`get_all_keys`, used in chunks 12b and 83c.
Uses `ex` 40c and `GHOST_GEN` 30d 30d.

B.4. **Check relations and measure parameters.** To prove theorems we need to measure (*measure*) some quantities or to check (*check_rel*) if two cycles from the figure are in a certain relation to each other, which were not explicitly defined by the construction.

B.4.1. *Checking relations.* A relation which may holds or not may be checked by the following method. It returns a **lst** of *GiNaC*::**relational**s, which present the relation between all pairs of cycles in the nodes with *key1* and *key2*.

23c ⟨public methods in figure class 21a⟩+≡ (37c) ◁23b 24d▷
ex *check_rel*(**const ex** & *key1*, **const ex** & *key2*, *PCR rel*, **bool** *use_cycle_metric*=**true**, **const ex** & *parameter*=0) **const**;

Defines:
`check_rel`, used in chunk 15e.
Uses `ex` 40c and `PCR` 33d.

The available cycles properties to check are as follows. Most of these properties are also behind the cycle relations described in C.
Orthogonality of cycles given by [19, § 6.1]:

$$\left\langle C, \tilde{C} \right\rangle = 0. \tag{14}$$

For circles it coincides with usual orthogonality, for other situations see [19, Ch. 6] for detailed analysis.

23d ⟨relations to check 23d⟩≡ (34d) 23e▷
ex *cycle_orthogonal*(**const ex** & *C1*, **const ex** & *C2*, **const ex** & *pr*=0);

Defines:
`cycle_orthogonal`, used in chunks 15b, 27a, 46b, 48, 49a, 51a, 67a, 99, and 100a.
Uses `ex` 40c.

Focal orthogonality of cycles [19, § 6.6]:

$$\left\langle \tilde{C}C\tilde{C}, \mathbb{R} \right\rangle = 0. \tag{15}$$

23e ⟨relations to check 23d⟩+≡ (34d) ◁23d 23f▷
ex *cycle_f_orthogonal*(**const ex** & *C1*, **const ex** & *C2*, **const ex** & *pr*=0);

Defines:
`cycle_f_orthogonal`, used in chunks 27b, 48, 49a, and 51a.
Uses `ex` 40c.

Tangent condition between two cycles which shall be used for checks. This relation is not suitable for construction, use *is_tangent* and the likes from Section C for this.

23f ⟨relations to check 23d⟩+≡ (34d) ◁23e 23g▷
ex *check_tangent*(**const ex** & *C1*, **const ex** & *C2*, **const ex** & *pr*=0);

Defines:
`check_tangent`, used in chunk 15e.
Uses `ex` 40c.

Check two cycles are different.

23g ⟨relations to check 23d⟩+≡ (34d) ◁23f 24a▷
ex *cycle_different*(**const ex** & *C1*, **const ex** & *C2*, **const ex** & *pr*=0);

Defines:
`cycle_different`, used in chunks 27c, 48, 49a, 51a, and 67a.
Uses `ex` 40c.

Check two cycles are almost different, counting possible rounding errors.

24a ⟨relations to check 23d⟩+≡ (34d) ◁23g 24b▷
```
ex cycle_adifferent(const ex & C1, const ex & C2, const ex & pr=0);
```
Defines:
cycle_adifferent, used in chunks 27d, 48, 49a, 51a, and 100a.
Uses ex 40c.

Check that the cycle product with other cycle (or itself) is non-positive.

24b ⟨relations to check 23d⟩+≡ (34d) ◁24a 24c▷
```
ex product_sign(const ex & C1, const ex & C2, const ex & pr=1);
```
Defines:
product_sign, used in chunks 27, 48, 49a, and 51a.
Uses ex 40c.

We may want to exclude cycles with imaginary coefficients, this condition check it.

24c ⟨relations to check 23d⟩+≡ (34d) ◁24b
```
ex coefficients_are_real(const ex & C1, const ex & C2, const ex & pr=1);
```
Defines:
coefficients_are_real, used in chunks 27g, 48, 49a, and 51a.
Uses ex 40c.

B.4.2. *Measuring quantites.* A quantity between two cycles may be measured by this method

24d ⟨public methods in figure class 21a⟩+≡ (37c) ◁23c 24e▷
```
ex measure(const ex & key1, const ex & key2, PCR rel, bool use_cycle_metric=true, const ex & parameter=0) const;
```
Defines:
measure, never used.
Uses ex 40c and PCR 33d.

B.5. **Accessing elements of the figure.** We can obtain *point_metric* and *cycle_metric* form a figure by the following methods.

24e ⟨public methods in figure class 21a⟩+≡ (37c) ◁24d 24f▷
```
inline ex get_point_metric() const { return point_metric; }
inline ex get_cycle_metric() const { return cycle_metric; }
```
Defines:
get_cycle_metric, used in chunk 62c.
get_point_metric, used in chunk 62c.
Uses cycle_metric 38d, ex 40c, and point_metric 38d.

Sometimes, we need to check the dimensionality of the figure, which is essentially the dimensionality of the metric.

24f ⟨public methods in figure class 21a⟩+≡ (37c) ◁24e 24g▷
```
inline ex get_dim() const { return ex_to<varidx>(point_metric.op(1)).get_dim(); }
```
Defines:
get_dim(), used in chunks 31a, 41b, 44–46, 61–64, 66d, 67a, 71a, 73c, 82, 83, 85b, 97b, and 98b.
Uses ex 40c, op 37f, and point_metric 38d.

All **cycle** associated with a key k can be obtained through the following method. The optional parameter tell which metric to use: either *point_metric* or *cycle_metric*. The method returns a list of cycles associated to the key k.

24g ⟨public methods in figure class 21a⟩+≡ (37c) ◁24f 24h▷
```
inline ex get_cycle(const ex & k, bool use_point_metric=true) const {
    return get_cycle(k,use_point_metric?point_metric:cycle_metric);}
```
Defines:
get_cycle, used in chunks 19a, 20d, 31a, 32d, 43c, 50c, 56d, 82a, 83d, 85c, 92c, and 93b.
Uses cycle_metric 38d, ex 40c, k 38g, and point_metric 38d.

In fact, we can use a similar method to get **cycle** with any permitted expression as a metric.

24h ⟨public methods in figure class 21a⟩+≡ (37c) ◁24g 25a▷
```
ex get_cycle(const ex & k, const ex & metric) const;
```
Defines:
get_cycle, used in chunks 19a, 20d, 31a, 32d, 43c, 50c, 56d, 82a, 83d, 85c, 92c, and 93b.
Uses ex 40c and k 38g.

Sometimes we need to apply a function to all **cycle**s which compose the **figure**. Here we define the type for such a function.

24i ⟨defining types 24i⟩≡ (30c) 33d▷
```
using PEVAL = std::function<ex(const ex &, const ex &)>;
```
Uses ex 40c.

This is the method to apply a function *func* to all particular **cycle**s which compose the **figure**. It returns a **lst** of **lst**s. Each sub-list has three elements: the returned value of *func*, the key of the respective **cycle_node** and the number of **cycle** in the respective node. The parameter *use_cycle_metric* tells which metric shall be used: either cycle space or point space, see [19, § 4.2].

25a ⟨public methods in figure class 21a⟩+≡ (37c) ◁24h 25b▷

```
ex apply(PEVAL func, bool use_cycle_metric=true, const ex & param = 0) const;
```

Defines:
`apply`, never used.
Uses `ex` 40c.

B.6. **Drawing and printing.** There is a collections of methods which help to visualise a figure. We use `Asymptote` to produce PostScript files.
The next method returns `Asymptote` [14] string which draws the entire figure. The drawing is controlled by two *style* and *lstring*. Initial parameters have the same meaning as in **cycle2D**::*asy_draw*(). Explicitly, the drawing is done within the rectangle with the lower left vertex (*xmin*, *ymin*) and upper right (*xmax*, *ymax*). The style of drawing is controlled by *default_asy* and *default_label*, see *asy_cycle_color*() and *label_pos*() for ideas. By default the *real_line* is drawn and the comments in the file are presented, this can be amended through *with_realline* and *with_header* parameters respectively. The default number of points per arc is reasonable in most cases, however user can override this with supplying a value to *points_per_arc*. The result is written to the stream *ost*.

25b ⟨public methods in figure class 21a⟩+≡ (37c) ◁25a 25c▷

```
void asy_draw(ostream & ost =std::cout, ostream & err=std::cerr, const string picture="",
              const ex & xmin = -5, const ex & xmax = 5,
              const ex & ymin = -5, const ex & ymax = 5,
              asy_style style=default_asy, label_string lstring=default_label,
              bool with_realline=true, bool with_header = true,
              int points_per_arc = 0, const string imaginary_options="rgb(0,.9,0)+4pt") const;
```

Defines:
`asy_draw`, used in chunks 85–87.
Uses `ex` 40c and `rgb` 12a 13f.

This method creates a temporary file with `Asymptote` commands to draw the figure, then calls the `Asymptote` to produce the graphic file, the temporary file is deleted afterwards. The parameters are the same as above in *asy_draw*(). The last parameter *rm_asy_file* tells if the `Asymptote` file shall be removed. User may keep it and fine-tune the result manually.

25c ⟨public methods in figure class 21a⟩+≡ (37c) ◁25b 26a▷

```
void asy_write(int size=300, const ex & xmin = -5, const ex & xmax = 5,
               const ex & ymin = -5, const ex & ymax = 5,
               string name="figure-view-tmp", string format="eps",
               asy_style style=default_asy, label_string lstring=default_label,
               bool with_realline=true, bool with_header = true,
           int points_per_arc = 0, const string imaginary_options="rgb(0,.9,0)+4pt", bool rm_asy_file=true) const;
```

Defines:
`asy_write`, used in chunks 12d, 16, and 19c.
Uses `ex` 40c, `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, `name` 22a, and `rgb` 12a 13f.

This a method to produce an animation. The figure may depend from some parameters, for example of **symbol** class. The first argument *val* is a **lst**, which contains expressions for substitutions into the figure. That is, elements of *val* can be any expression suitable to use as the first parameter of *subs* method in GiNaC. For example, they may be **relational**s (e.g. $t{=}1.5$) or **lst** of **relational**s (e.g. **lst**($t{=}1.5$,$s{=}2.1$). The method make the substitution the each element of **lst** into the figure and uses the resulting `Asymptote` drawings as a sequence of shots for the animations. The output *format* may be either predefined `"pdf"`, `"gif"`, `"mng"` or `"mp4"`, or user-specified `Asymptote` string.

The values of parameters can be put to the animation. The default bottom-left position is encoded as `"bl"` for *values_position*, other possible positions are `"br"` (bottom-right), `"tl"` (top-left) and `"tr"` (top-right). Any other string (e.g. the empty one) will preven the parameter values from printing.

The rest of parameters have the same meaning as in *asy_write*().

26a ⟨public methods in figure class 21a⟩+≡ (37c) ◁25c 26b▷

```
void asy_animate(const ex & val,
                 int size=300, const ex & xmin = -5, const ex & xmax = 5,
                 const ex & ymin = -5, const ex & ymax = 5,
                 string name="figure-animatecf-tmp", string format="pdf",
                 asy_style style=default_asy, label_string lstring=default_label,
                 bool with_realline=true, bool with_header = true,
                 int points_per_arc = 0, const string imaginary_options="rgb(0,.9,0)+4pt",
                 const string values_position="bl", bool rm_asy_file=true) const;
```

Defines:
`asy_animate`, never used.
Uses `ex` 40c, `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, `name` 22a, and `rgb` 12a 13f.

Evaluation of **cycle** within a figure with symbolic entries may took a long time. To prevent this we may use *freeze* method, and then *unfreeze* after numeric substitution is done.

26b ⟨public methods in figure class 21a⟩+≡ (37c) ◁26a 26c▷

```
inline figure freeze() const {setflag(status_flags::expanded); return *this;}
inline figure unfreeze() const {clearflag(status_flags::expanded); return *this;}
```

Defines:
`freeze`, never used.
`unfreeze`, used in chunk 87d.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

To speed-up evaluation of figures we may force float evaluation instead of exact arithmetic.

26c ⟨public methods in figure class 21a⟩+≡ (37c) ◁26b 26d▷

```
inline figure set_float_eval() {float_evaluation=true; return *this;}
inline figure set_exact_eval() {float_evaluation=false; return *this;}
```

Defines:
`set_exact_eval`, used in chunk 81d.
`set_float_eval`, used in chunk 81d.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d and `float_evaluation` 38f.

This method allows to specify a `Asymptote` drawing style for a particular node.

26d ⟨public methods in figure class 21a⟩+≡ (37c) ◁26c 26e▷

```
inline void set_asy_style(const ex & key, string opt) {nodes[key].set_asy_opt(opt);}
```

Defines:
`set_asy_style`, used in chunks 12b, 14, 15, 18, and 19b.
Uses `ex` 40c, `key` 22a, and `nodes` 38e.

To print a figure F as a list of nodes and relations between them it is enough to direct the figure to the stream:

cout $\ll$ F $\ll$*endl*;

B.7. **Saving and openning.** We can write a figure to a file as a GiNaC archive (`*.gar` file) named *file_name* at a node *fig_name*.

26e ⟨public methods in figure class 21a⟩+≡ (37c) ◁26d 26f▷

```
void save(const char* file_name, const char* fig_name="myfig") const;
```

Defines:
`save`, used in chunks 66b and 87d.

This constructor reads a figure stored in a GiNaC archive (`*.gar` file) named *file_name* at a node *fig_name*.

26f ⟨public methods in figure class 21a⟩+≡ (37c) ◁26e 37e▷

```
figure(const char* file_name, string fig_name="myfig");
```

Defines:
`figure`, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

Appendix C. Public methods in **cycle_relation**

Nodes within figure are connected by sets of relations. There is some essential relations pre-defined in the library. Users can define their own relations as well.

The following relations between cycles are predefined. Orthogonality of cycles given by [19, § 6.1]:

$$\left\langle C, \tilde{C} \right\rangle = 0. \tag{16}$$

27a ⟨predefined cycle relations 27a⟩≡ (35c) 27b▷

```
inline cycle_relation is_orthogonal(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_orthogonal, cm);}
```

Defines:
is_orthogonal, used in chunks 9f, 10b, 14, 18d, 19b, 35e, and 94c.
Uses cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

Focal orthogonality of cycles (15), see [19, § 6.6].

27b ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27a 27c▷

```
inline cycle_relation is_f_orthogonal(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_f_orthogonal, cm);}
```

Defines:
is_f_orthogonal, used in chunk 94d.
Uses cycle_f_orthogonal 23e 94d, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

We may want a cycle to be different from another. For example, if we look for intersection of two lines we want to exclude the infinity, where they are intersected anyway. Then, we may add the condition *is_different*(*F.get_infinity*()).

27c ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27b 27d▷

```
inline cycle_relation is_different(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_different, cm);}
```

Defines:
is_different, never used.
Uses cycle_different 23g 96b, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

Due to a possible rounding errors we include an approximate version of *is_different*.

27d ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27c 27e▷

```
inline cycle_relation is_adifferent(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_adifferent, cm);}
```

Defines:
is_adifferent, used in chunk 14.
Uses cycle_adifferent 24a 95a, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

This relation check if a cycle is a non-positive vector, for circles this corresponds to real (non-imaginary) circles. By default we check this in the point space metric.

27e ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27d 27f▷

```
inline cycle_relation is_real_cycle(const ex & key, bool cm=false, const ex & pr=1)
 {return cycle_relation(key, product_sign, cm, pr);}
```

Defines:
is_real_cycle, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and product_sign 24b 96c.

Effectively this is the same check but with a different name and other defaults. It may be used that both cycles are or are not separated by the light cone in the indefinite metric in space of cycles.

27f ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27e 27g▷

```
inline cycle_relation product_nonpositive(const ex & key, bool cm=true, const ex & pr=1)
 {return cycle_relation(key, product_sign, cm, pr);}
```

Defines:
product_nonpositive, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and product_sign 24b 96c.

We may want to exclude cycles with imaginary coefficients, this condition check it.

27g ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27f 28a▷

```
inline cycle_relation only_reals(const ex & key, bool cm=true, const ex & pr=0)
 {return cycle_relation(key, coefficients_are_real, cm, pr);}
```

Defines:
only_reals, never used.
Uses coefficients_are_real 24c 97b, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

This is tangency condition which shall be used to find tangent cycles.

28a ⟨predefined cycle relations 27a⟩+≡ (35c) ◁27g 28b▷
```
inline cycle_relation is_tangent(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_tangent, cm);}
```
Defines:
is_tangent, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, cycle_tangent 34e 95c, ex 40c, and key 22a.

The split version for inner and outer tangent cycles.

28b ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28a 28c▷
```
inline cycle_relation is_tangent_i(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_tangent_i, cm);}
inline cycle_relation is_tangent_o(const ex & key, bool cm=true)
                {return cycle_relation(key, cycle_tangent_o, cm);}
```
Defines:
is_tangent_i, used in chunks 15d and 19b.
is_tangent_o, used in chunk 15d.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, cycle_tangent_i 34e 96a, cycle_tangent_o 34e 95d, ex 40c, and key 22a.

The relation between cycles to "intersect with certain angle" (but the "intersection" may be imaginary). If cycles are intersecting indeed then the value of *pr* is the cosine of the angle.

28c ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28b 28d▷
```
inline cycle_relation make_angle(const ex & key, bool cm=true, const ex & angle=0)
                {return cycle_relation(key, cycle_angle, cm, angle);}
```
Defines:
make_angle, never used.
Uses cycle_angle 34e 96d, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

The next relation defines a generalisation of a Steiner power of a point for cycles.

28d ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28c 28e▷
```
inline cycle_relation cycle_power(const ex & key, bool cm=true, const ex & cpower=0)
                {return cycle_relation(key, steiner_power, cm, cpower);}
```
Defines:
cycle_power, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and steiner_power 34e 96e.

The next relation defines tangential distance between cycles.

28e ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28d 28f▷
```
inline cycle_relation tangential_distance(const ex & key, bool cm=true, const ex & distance=0)
                {return cycle_relation(key, steiner_power, cm, pow(distance,2));}
```
Defines:
tangential_distance, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and steiner_power 34e 96e.

The next relation defines cross-tangential distance between cycles.

28f ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28e 28g▷
```
inline cycle_relation cross_t_distance(const ex & key, bool cm=true, const ex & distance=0)
                {return cycle_relation(key, cycle_cross_t_distance, cm, distance);}
```
Defines:
cross_t_distance, never used.
Uses cycle_cross_t_distance 34e 97a, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and key 22a.

The next relation creates a cycle, which is a Möbius transformation of an existing cycle. The transformation is defined by a list of four entries which will make a 2×2 matrix. The default value corresponds to the identity map. User will need to use a proper Clifford algebra for the matrix to make this transformation works. In two dimensions the next method makes a relief.

28g ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28f 29a▷
```
inline cycle_relation moebius_transform(const ex & key, bool cm=true,
                                const ex & matrix=lst(numeric(1),0,0,numeric(1)))
                {return cycle_relation(key, cycle_moebius, cm, matrix);}
```
Defines:
moebius_transform, never used.
Uses cycle_moebius 35a 97e, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and numeric 12f.

This is a simplified variant of the previous transformations for two dimension figures and transformations with real entries. The corresponding check will be carried out by the library. Then, the library will convert it into the proper Clifford valued matrix.

29a ⟨predefined cycle relations 27a⟩+≡ (35c) ◁28g
```
cycle_relation sl2_transform(const ex & key, bool cm=true,
                             const ex & matrix=lst(numeric(1),0,0,numeric(1)));
```
Defines:
sl2_transform, never used.
Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, key 22a, and numeric 12f.

This is a constructor which creates a relation of the type *rel* to a node labelled by *key*. Boolean *cm* tells either to chose cycle metric or point metric for the relation. An additional parameter *p* can be supplied to the relation.

29b ⟨public methods for cycle relation 29b⟩≡ (34a)
```
cycle_relation(const ex & key, PCR rel, bool cm=true, const ex & p=0);
```
Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses ex 40c, key 22a, and PCR 33d.

There is also an additional method to define a joint relation to several parents by insertion of a **subfigure**, see *midpoint_constructor* below.

29c ⟨public methods for subfigure 29c⟩≡ (36a)
```
subfigure(const ex & F, const ex & L);
```
Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.
Uses ex 40c.

Appendix D. Addtional utilities

Here is a procedure which returns a figure, which can be used to build a conformal version of the midpoint. The methods require three points, say *v1*, *v2* and *v3*. If *v3* is infinity, then the midpoint between *v1* and *v2* can be build using the orthogonality only. Put a cycle *v4* joining *v1*, *v2* and *v3*. Then construct a cycle *v5* with the diameter *v1*–*v2*, that is passing these points and orthogonal to *v4*. Then, put the cycle *v6* which passes *v3* and is orthogonal to *v4* and *v5*. The intersection *r* of *v6* and *v4* is the midpoint of *v1*–*v2*.

29d ⟨additional functions header 29d⟩≡ (30c) 29e▷
```
ex midpoint_constructor();
```
Defines:
midpoint_constructor, used in chunk 13a.
Uses ex 40c.

This utility make pair-wise comparison of cycles in the list *L* and deletes duplicates.

29e ⟨additional functions header 29d⟩+≡ (30c) ◁29d 29f▷
```
ex unique_cycle(const ex & L);
```
Defines:
unique_cycle, used in chunk 81c.
Uses ex 40c.

The debug output may be switched on and switched off by the following methods.

29f ⟨additional functions header 29d⟩+≡ (30c) ◁29e
```
void figure_debug_on();
void figure_debug_off();
bool figure_ask_debug_status();
```
Defines:
figure_ask_debug_status, never used.
figure_debug_off, never used.
figure_debug_on, never used.

Appendix E. Figure Library Header File

Here is the header file of the library. Initially, an end-user does not need to know its structure much beyond the material presented in Sections B–C and illustrated in Section A. Here is some further topics which can be of interest as well:

- An intermediate end-user may wish to define his own **subfigure**s, see *midpoint_constructor* for a sample and Subsect. E.4.
- Furthermore, an advanced end-user may wish to define some additional **cycle_relation** to supplement already presented in Section C, in this case only knowledge of **cycle_relation** class is required, see Subsect. E.3.
- To adjust automatically created Asymptote graphics user may want to adjust the default styles, see Subsect. E.6.

30a ⟨figure.h 30a⟩≡ 30b ▷
```
⟨license 101⟩
#ifndef ___figure__
#define ___figure__
```
Defines:
___figure__, used in chunk 30c.

Some libraries we are using.

30b ⟨figure.h 30a⟩+≡ ◁30a 30c ▷
```
#include <iostream>
#include <cstdlib>
#include <cstdio>
#include <fstream>
#include <regex>
#include "cycle.h"

namespace MoebInv {
using namespace std;
using namespace GiNaC;
```
Defines:
MoebInv, used in chunks 30c, 39c, and 40b.

The overview of the header file.

30c ⟨figure.h 30a⟩+≡ ◁30b
```
⟨figure define 30d⟩
⟨defining types 24i⟩
⟨cycle data header 30e⟩
⟨cycle node header 31b⟩
⟨cycle relations 33e⟩
⟨asy styles 39a⟩
⟨figure header 36d⟩
⟨subfigure header 36a⟩
⟨additional functions header 29d⟩
} // namespace MoebInv
#endif /* defined(___figure__) */
```
Uses ___figure__ 30a and MoebInv 9c 30b.

We use negative numbered generations to save the reference objects.

30d ⟨figure define 30d⟩≡ (30c)
```
#define REAL_LINE_GEN -1
#define INFINITY_GEN -2
#define GHOST_GEN -3
```
Defines:
GHOST_GEN, used in chunks 23b, 67a, 68d, 72e, 83c, and 89a.
INFINITY_GEN, used in chunks 61c and 62d.
REAL_LINE_GEN, used in chunks 61d, 62d, and 85c.

E.1. **cycle_data class declaration.** The class to store explicit data of an individual **cycle**. An end-user does not need normally to know about it.

30e ⟨cycle data header 30e⟩≡ (30c) 30f ▷
```
class cycle_data : public basic
{
GINAC_DECLARE_REGISTERED_CLASS(cycle_data, basic)
```
Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.

The parameters of the stored **cycle**.

30f ⟨cycle data header 30e⟩+≡ (30c) ◁30e 31a ▷
```
protected:
    ex k,
    l,
    m;
```
Uses ex 40c, k 38g, l 38g, and m 38g.

Public methods in the class. However, an end-user does not normally need them.

31a ⟨cycle data header 30e⟩+≡ (30c) ◁30f
```
  public:
    cycle_data(const ex & C);
    cycle_data(const ex & k1, const ex l1, const ex &m1, bool normalize=false);
    ex get_cycle(const ex & metr) const;
    inline size_t nops() const { return 3; }
    ex op(size_t i) const;
    ex & let_op(size_t i);
    inline ex get_k() const { return k; }
    inline ex get_l() const { return l; }
    inline ex get_l(size_t i) const { return l.op(0).op(i); }
    inline ex get_m() const { return m;}
      inline int get_dim() const { return l.op(0).nops(); }
    void do_print(const print_dflt & con, unsigned level) const;
    void archive(archive_node &n) const;
    inline ex normalize() const {return cycle_data(k,l,m,true);}
    ex num_normalize() const;
    void read_archive(const archive_node &n, lst &sym_lst);
    bool is_equal(const basic & other, bool projectively) const;
    bool is_almost_equal(const basic & other, bool projectively) const;
    cycle_data subs(const ex & e, unsigned options=0) const;
    ex subs(const exmap & em, unsigned options=0) const;
    inline bool has(const ex & x) const { return (k.has(x) ∨ l.has(x) ∨ m.has(x)); }

  protected:
    return_type_t return_type_tinfo() const;
};
GINAC_DECLARE_UNARCHIVER(cycle_data);
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
Uses archive 37f, ex 40c, get_cycle 24g 24h, get_dim() 24f, is_almost_equal 98c, k 38g, l 38g, m 38g, nops 37f, op 37f, read_archive 37f, and subs 37f.

E.2. **cycle_node class declaration.** Forward declaration.

31b ⟨cycle node header 31b⟩≡ (30c) 31c▷
```
  class cycle_relation;
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b.

The class to store nodes containing data of particular cycles and relations between nodes. An end-user does not need normally to know about it.

31c ⟨cycle node header 31b⟩+≡ (30c) ◁31b 31d▷
```
  class cycle_node : public basic
  {
  GINAC_DECLARE_REGISTERED_CLASS(cycle_node, basic)
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.

Members of the class.

31d ⟨cycle node header 31b⟩+≡ (30c) ◁31c 32a▷
```
  protected:
    lst cycles; // List of cycle data entries
    int generation;
    lst children; // List of keys to cycle_nodes
    lst parents; // List of cycle_relations or a list containing a single subfigure
    string custom_asy; // Custom string for Asymptote
```

Uses subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

Constructors in the class.

32a ⟨cycle node header 31b⟩+≡ (30c) ◁31d 32b▷
```
public:
    cycle_node(const ex & C, int g=0);
    cycle_node(const ex & C, int g, const lst & par);
    cycle_node(const ex & C, int g, const lst & par, const lst & chil);
    cycle_node(const ex & C, int g, const lst & par, const lst & chil, string ca);
    cycle_node subs(const ex & e, unsigned options=0) const;
    ex subs(const exmap & m, unsigned options=0) const;
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, m 38g, and subs 37f.

Add a chid **cycle_node** to the **cycle_node**.

32b ⟨cycle node header 31b⟩+≡ (30c) ◁32a 32c▷
```
protected:
    inline void add_child(const ex & c) {children.append(c);}
```

Uses ex 40c.

Access **cycle** parameters.

32c ⟨cycle node header 31b⟩+≡ (30c) ◁32b 32d▷
```
    inline ex get_cycles() const {return cycles;}
```

Uses ex 40c.

Return the **cycle** object for every **cycle_data** stored in *cycles*.

32d ⟨cycle node header 31b⟩+≡ (30c) ◁32c 32e▷
```
    ex get_cycle(const ex & metr) const;
    inline ex get_cycle_data(int i) const {return cycles.op(i);}
```

Uses ex 40c, get_cycle 24g 24h, and op 37f.

Return the generation number.

32e ⟨cycle node header 31b⟩+≡ (30c) ◁32d 32f▷
```
    inline int get_generation() const {return generation;}
```

Return the children list

32f ⟨cycle node header 31b⟩+≡ (30c) ◁32e 32g▷
```
    inline lst get_children() const {return children;}
```

Replace the current **cycle** with a new **cycle**.

32g ⟨cycle node header 31b⟩+≡ (30c) ◁32f 32h▷
```
    void set_cycles(const ex & C);
```

Uses ex 40c.

Add one more **cycle** instance to list of *cycles*.

32h ⟨cycle node header 31b⟩+≡ (30c) ◁32g 32i▷
```
    void append_cycle(const ex & C);
    void append_cycle(const ex & k, const ex & l, const ex & m);
```

Uses ex 40c, k 38g, l 38g, and m 38g.

Return the parent list.

32i ⟨cycle node header 31b⟩+≡ (30c) ◁32h 32j▷
```
    lst get_parents() const;
```

The method returns the list of all keys to parant cycles.

32j ⟨cycle node header 31b⟩+≡ (30c) ◁32i 33a▷
```
    lst get_parent_keys() const ;
```

Remove a child of the **cycle_node**.

33a ⟨cycle node header 31b⟩+≡ (30c) ◁32j 33b▷
```
void remove_child(const ex & c);
```

Uses ex 40c.

Set Asymptote option for this particular node.

33b ⟨cycle node header 31b⟩+≡ (30c) ◁33a 33c▷
```
inline void set_asy_opt(const string opt) {custom_asy=opt;}
```

Service functions including printout the mathematical expression.

33c ⟨cycle node header 31b⟩+≡ (30c) ◁33b
```
inline size_t nops() const { return cycles.nops()+children.nops()+parents.nops(); }
ex op(size_t i) const;
ex & let_op(size_t i);
void do_print(const print_dflt & con, unsigned level) const;
void do_print_tree(const print_tree & con, unsigned level) const;
protected:
return_type_t return_type_tinfo() const;
void archive(archive_node &n) const;
void read_archive(const archive_node &n, lst &sym_lst);

friend class cycle_relation;
friend class figure;
};
GINAC_DECLARE_UNARCHIVER(cycle_node);
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses archive 37f, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, nops 37f, op 37f, and read_archive 37f.

E.3. **cycle_relation class declaration.** First, we define a type to hold cycle relations. That is a pointer to a functions with two arguments. See the definition of *cycle_orthogonal*, *cycle_different*, for samples.

33d ⟨defining types 24i⟩+≡ (30c) ◁24i
```
using PCR = std::function<ex(const ex &, const ex &, const ex &)>;
```

Defines:
PCR, used in chunks 23c, 24d, 29b, 33e, 34a, 46c, 92b, and 93a.
Uses ex 40c.

This class describes relations between **cycle_node**s. An advanced end-user may want to add some new relations similar to already provided in Section C. Note however, that archiving (saving) of user-defined relations cannot be done as they contain pointers to functions which are not portable.
Memebrs of the class.

33e ⟨cycle relations 33e⟩≡ (30c) 34a▷
```
class cycle_relation : public basic
{
GINAC_DECLARE_REGISTERED_CLASS(cycle_relation, basic)
protected:
ex parkey; // A key to a parent cycle_node in figure
PCR rel; // A pointer to function which produces the relation
ex parameter; // The value, which is supplied to rel() as the third parameter
bool use_cycle_metric; // If true uses the cycle space metric, otherwise the point space metric
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, key 22a, and PCR 33d.

Public methods in the class.

34a ⟨cycle relations 33e⟩+≡ (30c) ◁33e 34b▷
```
public:
    ⟨public methods for cycle relation 29b⟩
    inline ex get_parkey() const {return parkey;}
    inline PCR get_PCR() const {return rel;}
    inline ex get_parameter() const {return parameter;}
    inline bool cycle_metric_inuse() const {return use_cycle_metric;}
    inline ex subs(const exmap & em, unsigned options=0) const
    {return cycle_relation(parkey, rel, use_cycle_metric, parameter.subs(em,options));}
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, PCR 33d, and subs 37f.

Protected methods in the class.

34b ⟨cycle relations 33e⟩+≡ (30c) ◁34a 34c▷
```
protected:
    ex rel_to_parent(const cycle_data & C1, const ex & pmetric, const ex & cmetric,
                     const exhashmap<cycle_node> & N) const;
    return_type_t return_type_tinfo() const;
    void do_print(const print_dflt & con, unsigned level) const;
    void do_print_tree(const print_tree & con, unsigned level) const;
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, and ex 40c.

(un)Archiving of **cycle_relation** is not universal. At present it only can handle relations declared in the header file *cycle_orthogonal*, *cycle_f_orthogonal*, *cycle_adifferent*, *cycle_different*, *cycle_tangent*, *cycle_power* etc. from Subsection C.

34c ⟨cycle relations 33e⟩+≡ (30c) ◁34b 34d▷
```
    void archive(archive_node &n) const;
    void read_archive(const archive_node &n, lst &sym_lst);

    inline size_t nops() const { return 2; }
    ex op(size_t i) const;
    ex & let_op(size_t i);

  friend class cycle_node;
  friend class figure;
  };
  GINAC_DECLARE_UNARCHIVER(cycle_relation);
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses archive 37f, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, nops 37f, op 37f, and read_archive 37f.

The following functions are used as *PCR* pointers for corresponding cycle relations.

34d ⟨cycle relations 33e⟩+≡ (30c) ◁34c 34e▷
```
  ⟨relations to check 23d⟩
```

The following procedures are used to construct relations but are impractical to check.

34e ⟨cycle relations 33e⟩+≡ (30c) ◁34d 35a▷
```
  ex cycle_tangent(const ex & C1, const ex & C2, const ex & pr=0);
  ex cycle_tangent_i(const ex & C1, const ex & C2, const ex & pr=0);
  ex cycle_tangent_o(const ex & C1, const ex & C2, const ex & pr=0);
  ex cycle_angle(const ex & C1, const ex & C2, const ex & pr);
  ex steiner_power(const ex & C1, const ex & C2, const ex & pr);
  ex cycle_cross_t_distance(const ex & C1, const ex & C2, const ex & pr);
```

Defines:
cycle_angle, used in chunks 28c, 48, 49a, and 51a.
cycle_cross_t_distance, used in chunks 28f, 48, 49a, and 51a.
cycle_tangent, used in chunks 28a, 48, 49a, and 51a.
cycle_tangent_i, used in chunks 28b, 48, 49a, and 51a.
cycle_tangent_o, used in chunks 28b, 48, 49a, and 51a.
steiner_power, used in chunks 28, 48, 49a, and 51a.
Uses ex 40c.

Möbius transformations.

35a ⟨cycle relations 33e⟩+≡ (30c) ◁34e 35b▷
```
ex cycle_moebius(const ex & C1, const ex & C2, const ex & pr);
ex cycle_sl2(const ex & C1, const ex & C2, const ex & pr);
```
Defines:
cycle_moebius, used in chunks 28g, 48, 49a, and 51a.
cycle_sl2, used in chunks 48, 49a, 51a, and 98a.
Uses ex 40c.

The next functions are used to measure certain quantities between cycles.

35b ⟨cycle relations 33e⟩+≡ (30c) ◁35a 35c▷
```
ex power_is(const ex & C1, const ex & C2, const ex & pr=1);
inline ex sq_t_distance_is(const ex & C1, const ex & C2, const ex & pr=1)
 {return power_is(C1,C2,1);}
inline ex sq_cross_t_distance_is(const ex & C1, const ex & C2, const ex & pr=-1)
 {return power_is(C1,C2,-1);}
ex angle_is(const ex & C1, const ex & C2, const ex & pr=0);
```
Defines:
angle_is, never used.
power_is, never used.
sq_cross_t_distance_is, never used.
sq_t_distance_is, never used.
Uses ex 40c.

We include the list of pre-defined cycle relations.

35c ⟨cycle relations 33e⟩+≡ (30c) ◁35b 35d▷
```
⟨predefined cycle relations 27a⟩
```

We explicitly define three types of metrics on a plane: elliptic, parabolic, hyperbolic.

35d ⟨cycle relations 33e⟩+≡ (30c) ◁35c 35e▷
```
ex metric_e = clifford_unit(varidx(symbol("i"), 2), indexed(diag_matrix(lst(-1,-1)), sy_symm(),
                                                    varidx(symbol("j"), 2), varidx(symbol("k"), 2)));
ex metric_p = clifford_unit(varidx(symbol("i"), 2), indexed(diag_matrix(lst(-1,0)), sy_symm(),
                                                    varidx(symbol("j"), 2), varidx(symbol("k"), 2)));
ex metric_h = clifford_unit(varidx(symbol("i"), 2), indexed(diag_matrix(lst(-1,1)), sy_symm(),
                                                    varidx(symbol("j"), 2), varidx(symbol("k"), 2)));
```
Defines:
metric_e, used in chunk 35e.
metric_h, used in chunk 35e.
metric_p, used in chunk 35e.
Uses ex 40c and k 38g.

Orthogonality of cycles of three types independent from a metric stored in the figure.

35e ⟨cycle relations 33e⟩+≡ (30c) ◁35d
```
inline ex cycle_orthogonal_e(const ex & C1, const ex & C2, const ex & pr=0) {
    return lst((ex)lst(ex_to<cycle>(C1).is_orthogonal(ex_to<cycle>(C2), metric_e)));}

inline ex cycle_orthogonal_p(const ex & C1, const ex & C2, const ex & pr=0) {
    return lst((ex)lst(ex_to<cycle>(C1).is_orthogonal(ex_to<cycle>(C2), metric_p)));}

inline ex cycle_orthogonal_h(const ex & C1, const ex & C2, const ex & pr=0) {
    return lst((ex)lst(ex_to<cycle>(C1).is_orthogonal(ex_to<cycle>(C2), metric_h)));}
```
Defines:
cycle_orthogonal_e, never used.
cycle_orthogonal_h, never used.
cycle_orthogonal_p, never used.
Uses ex 40c, is_orthogonal 13e 27a, metric_e 35d, metric_h 35d, and metric_p 35d.

E.4. **subfigure class declaration. subfigure**] **class** *allows to encapsulate some common constructions.*

The library provides an important example [[*midpoint*. End-user may define his own **subfigure**s, they will not be handled as native ones, including (un)archiving.

In the essence **subfigure** is created from a **figure**, which were designed to be included in another figures.

36a ⟨subfigure header 36a⟩≡ (30c) 36b▷

```
class subfigure : public basic
{
    GINAC_DECLARE_REGISTERED_CLASS(subfigure, basic)
protected:
    ex subf; // A figure to be inserted
    lst parlist; // A list of key to a parent cycle_node in figure
public:
    ⟨public methods for subfigure 29c⟩
    inline ex subs(const exmap & em, unsigned options=0) const;
```

Defines:
`subfigure`, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.
Uses `cycle_node` 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, `ex` 40c, `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, `key` 22a, and `subs` 37f.

Some service methods.

36b ⟨subfigure header 36a⟩+≡ (30c) ◁36a 36c▷

```
protected:
    inline ex get_parlist() const {return parlist;}
    inline ex get_subf() const {return subf;}
    return_type_t return_type_tinfo() const;
    void do_print(const print_dflt & con, unsigned level) const;
    void do_print_tree(const print_tree & con, unsigned level) const;
```

Uses `ex` 40c.

(un)Archiving of **cycle_relation** is not universal. At present it only can handle relations declared in the header file *p_orthogonal*, *p_f_orthogonal*, *p_adifferent*, *p_different* and *p_tangent* etc. from Subsection C.

36c ⟨subfigure header 36a⟩+≡ (30c) ◁36b

```
    void archive(archive_node &n) const;
    void read_archive(const archive_node &n, lst &sym_lst);

  friend class cycle_node;
  friend class figure;
  };
  GINAC_DECLARE_UNARCHIVER(subfigure);
```

Defines:
`subfigure`, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.
Uses `archive` 37f, `cycle_node` 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and `read_archive` 37f.

E.5. **figure class declaration.** The essential interface to **figure** class was already presented in Section B, here we keep the less-used elements. An advanced end-user may be interested in **figure** class members given in § E.5.1.
We define **figure** class as a children of GiNaC **basic**.

36d ⟨figure header 36d⟩≡ (30c) 37a▷

```
class figure : public basic
{
GINAC_DECLARE_REGISTERED_CLASS(figure, basic)

  ⟨member of figure class 38c⟩
```

Defines:
`figure`, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

The method to update **cycle_node** with labelled by the *key*. Since the list of conditions may branches and has a variable length the method runs recursively with *level* parameterising the depth of nested calls.

37a ⟨figure header 36d⟩+≡ (30c) ◁36d 37b▷

```
protected:
    ex update_cycle_node(const ex & key, const lst & eq_cond=lst(),
                         const lst & neq_cond=lst(), lst res=lst(), unsigned int level=0);
    void set_cycle(const ex & key, const ex & C);
```

Defines:
set_cycle, used in chunks 68 and 82a.
update_cycle_node, used in chunks 67c, 69d, 70b, 72a, 80–82, and 84b.
Uses ex 40c and key 22a.

Evaluate a cycle through a list of conditions.

37b ⟨figure header 36d⟩+≡ (30c) ◁37a 37c▷

```
    ex evaluate_cycle(const ex & symbolic, const lst & cond) const;
```

Uses ex 40c.

We include here methods from Section B, which are of interest for an end-user.

37c ⟨figure header 36d⟩+≡ (30c) ◁37b 37d▷

```
protected:
    ⟨public methods in figure class 21a⟩
```

The following methods are public as well however may be less used.

37d ⟨figure header 36d⟩+≡ (30c) ◁37c 37g▷

```
    inline ex get_cycle_node(const ex & k) const {return nodes.find(k)→second;}
    inline ex get_real_line() const {return real_line;}
    inline ex get_infinity() const {return infinity;}
```

Defines:
get_cycle_node, never used.
get_infinity, used in chunk 19b.
get_real_line, used in chunk 10b.
Uses ex 40c, infinity 38c, k 38g, nodes 38e, and real_line 38c.

The method returning all nodes.

37e ⟨public methods in figure class 21a⟩+≡ (37c) ◁26f 37f▷

```
    inline exhashmap<cycle_node> get_nodes() const {return nodes;}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and nodes 38e.

Some standard GiNaC methods which are not very interesting for end-user, who is working within functional programming set-up.

37f ⟨public methods in figure class 21a⟩+≡ (37c) ◁37e

```
    inline size_t nops() const {return 4+nodes.size();}
    ex op(size_t i) const;
    //ex & let_op(size_t i);
    ex evalf(int level=0) const;
    figure subs(const ex & e, unsigned options=0) const;
    ex subs(const exmap & m, unsigned options=0) const;
    void archive(archive_node &n) const;
    void read_archive(const archive_node &n, lst &sym_lst);
    bool info(unsigned inf) const;
```

Defines:
archive, used in chunks 31a, 33c, 34c, 36c, 42c, 48, 49a, 53, 59c, 65c, 66b, and 90d.
evalf, used in chunks 15e, 19, 40d, 74a, 75e, 78e, 80a, 86a, 90c, 96c, and 97b.
info, used in chunks 59a, 67c, 69d, 70b, 72a, 80d, 82c, 84a, 90a, 92a, and 98a.
nops, used in chunks 20d, 31a, 33c, 34c, 43, 52, 56, 57e, 59c, 62b, 63e, 66–68, 71–77, 79d, 81, 82c, 84a, 89, 99a, and 100b.
op, used in chunks 11e, 20d, 24f, 31–34, 41b, 43a, 46a, 52a, 56a, 57e, 59a, 62–64, 67, 71c, 74–82, 86a, 89b, 90a, 92d, 93a, 97, and 98.
read_archive, used in chunks 31a, 33c, 34c, 36c, 42d, 49a, 53c, 60a, and 91b.
subs, used in chunks 11e, 31a, 32a, 34a, 36a, 41b, 45, 54a, 59, 67d, 75–79, 87d, and 90.
Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, m 38g, and nodes 38e.

Printing and returning the objects list.

37g ⟨figure header 36d⟩+≡ (30c) ◁37d 38a▷

```
protected:
    void do_print(const print_dflt & con, unsigned level) const;
    return_type_t return_type_tinfo() const;
```

Update all cycles (with all children) in the given list.

38a ⟨figure header 36d⟩+≡ (30c) ◁37g 38b▷
```
void update_node_lst(const ex & inlist);
```
Defines:
update_node_lst, used in chunks 69a, 72, 82d, and 84a.
Uses ex 40c.

Update the entire figure.

38b ⟨figure header 36d⟩+≡ (30c) ◁38a
```
    figure update_cycles();
};
GINAC_DECLARE_UNARCHIVER(figure);
```
Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
update_cycles, used in chunks 82c, 83b, and 90b.

E.5.1. *Members of* **figure** *class.* A knowledge of **figure** class members may be useful for advanced users. The real line and infinity are two cycles which are present at any figure.

38c ⟨member of figure class 38c⟩≡ (36d) 38d▷
```
protected:
 ex real_line, // the key for the real line
    infinity; // the key for cycle at infinity
```
Defines:
infinity, used in chunks 37d, 61, 62d, 65, 67a, and 89–91.
real_line, used in chunks 37d, 61–63, 65, and 89–91.
Uses ex 40c and key 22a.

We define separate metrics for the point and cycle spaces, see [19, § 4.2].

38d ⟨member of figure class 38c⟩+≡ (36d) ◁38c 38e▷
```
    ex point_metric; // The metric of the point space encoded as a clifford_unit object
    ex cycle_metric; // The metric of the cycle space encoded as a clifford_unit object
```
Defines:
cycle_metric, used in chunks 24, 61–65, 80–82, 86a, and 89–93.
point_metric, used in chunks 24, 61–63, 65a, 80–82, 85c, 86a, and 89–93.
Uses ex 40c.

This is the *hashmap* of **cycle_node** which encode the relation in the figure.

38e ⟨member of figure class 38c⟩+≡ (36d) ◁38d 38f▷
```
    exhashmap<cycle_node> nodes; // List of cycle_node, exhashmap<cycle_node> object
```
Defines:
nodes, used in chunks 26d, 37, 61, 62c, 65b, 67–73, 80–85, and 89–93.
Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

The following variable controls either we are doing exact or float evaluations of cycles parameters.

38f ⟨member of figure class 38c⟩+≡ (36d) ◁38e 38g▷
```
    bool float_evaluation=false;
```
Defines:
float_evaluation, used in chunks 26c, 74a, 75e, 80a, 81d, 90d, and 91b.

These are symbols for internal calculations, they are out of the interest we do not count them in *nops*() methods.

38g ⟨member of figure class 38c⟩+≡ (36d) ◁38f
```
    ex k, m; // realsymbols for symbolic calculations
    lst l;
```
Defines:
k, used in chunks 11e, 12b, 24, 30–32, 35d, 37d, 40–46, 57b, 61, 65, and 82b.
l, used in chunks 30–32, 40–43, 45, 46a, 51a, 52d, 57b, 59a, 61, 64, 65, 70c, and 82b.
m, used in chunks 30–32, 37f, 40–46, 51a, 57b, 61, 65, 82b, and 90.
Uses ex 40c.

E.6. `Asymptote` **customization.** The library provides a possibility to fine-tune `Asymptote` output. We provide some default styles, a user may customise them according to existing needs.

We define a type for producing colouring scheme for `Asymptote` drawing.

39a ⟨asy styles 39a⟩≡ (30c) 39b ▷
```
using asy_style=std::function<string(const ex &, const ex &, lst &)>;
//typedef string (*asy_style)(const ex &, const ex &, lst &);
inline string no_color(const ex & label, const ex & C, lst & color) {color=lst(0,0,0); return "";}
string asy_cycle_color(const ex & label, const ex & C, lst & color);
asy_style default_asy=asy_cycle_color;
```

Uses `asy_cycle_color` 93c and `ex` 40c.

Similarly we produce a default labelling style.

39b ⟨asy styles 39a⟩+≡ (30c) ◁39a
```
using label_string=std::function<string(const ex &, const ex &, const string)>;
//typedef string (*label_string)(const ex &, const ex &, const string);
string label_pos(const ex & label, const ex & C, const string draw_str);
inline string no_label(const ex & label, const ex & C, const string draw_str) {return "";}
//label_string default_label=*no_label;
label_string default_label=label_pos;
```

Uses `ex` 40c and `label_pos` 94a.

Appendix F. Implementation of Classes

39c ⟨figure.cpp 39c⟩≡ 39d ▷
```
⟨license 101⟩
#include "figure.h"

namespace MoebInv {
using namespace std;
using namespace GiNaC;

unsigned do_not_update_subfigure = 0x0100;
```

Defines:
`do_not_update_subfigure`, used in chunks 54a and 90b.
Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d and `MoebInv` 9c 30b.

This can de defined **false** to prevent some diagnostic output to *std*::*cerr*.

39d ⟨figure.cpp 39c⟩+≡ ◁39c 40a ▷
```
bool FIGURE_DEBUG=true;
```

Defines:
`FIGURE_DEBUG`, used in chunks 58a, 65–69, 71–73, 83d, 86, 89a, and 100c.

We use GiNaC implementation macros for our classes.

40a ⟨figure.cpp 39c⟩+≡ ◁39d 40b▷

```
GINAC_IMPLEMENT_REGISTERED_CLASS_OPT(cycle_data, basic,
                                     print_func<print_dflt>(&cycle_data::do_print))

GINAC_IMPLEMENT_REGISTERED_CLASS_OPT(cycle_relation, basic,
                                     print_func<print_dflt>(&cycle_relation::do_print).
print_func<print_tree>(&cycle_relation::do_print_tree))

GINAC_IMPLEMENT_REGISTERED_CLASS_OPT(subfigure, basic,
                                     print_func<print_dflt>(&subfigure::do_print))

GINAC_IMPLEMENT_REGISTERED_CLASS_OPT(cycle_node, basic,
                                     print_func<print_dflt>(&cycle_node::do_print).
print_func<print_tree>(&cycle_relation::do_print_tree))

GINAC_IMPLEMENT_REGISTERED_CLASS_OPT(figure, basic,
                                     print_func<print_dflt>(&figure::do_print))
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

This is the outline of the code.

40b ⟨figure.cpp 39c⟩+≡ ◁40a

```
⟨auxillary function 40c⟩
⟨add cycle relations 94c⟩
⟨cycle data class 40e⟩
⟨cycle relation class 46b⟩
⟨subfigure class 52c⟩
⟨cycle node class 54b⟩
⟨figure class 61a⟩
⟨addional functions 98c⟩
} // namespace MoebInv
```

Uses MoebInv 9c 30b.

Exact solving of quadratic equations is not always practical, thus we relay on some rounding methods. If the outcome is not good for you increase the precision with *GiNaC*::*Digits*.

40c ⟨auxillary function 40c⟩≡ (40b) 40d▷

```
const ex epsilon=GiNaC::pow(10,-Digits÷2);
```

Defines:
epsilon, used in chunks 40d and 96c.
ex, used in chunks 9–15, 18, 20–41, 43–46, 48–76, 78c, 80b, 83–87, and 89–100.

an auxillary function to find small numbers

40d ⟨auxillary function 40c⟩+≡ (40b) ◁40c

```
bool is_less_than_epsilon(const ex & x)
{
        return ( x.is_zero() ∨ abs(x).evalf() < epsilon ) ;
}
```

Defines:
is_less_than_epsilon, used in chunks 45, 46a, 76, 78c, 79a, 81c, 86a, 93c, and 96–99.
Uses epsilon 40c, evalf 37f, and ex 40c.

F.1. Implementation of cycle_data class. Constructors

40e ⟨cycle data class 40e⟩≡ (40b) 41a▷

```
cycle_data::cycle_data() : k(), l(), m()
{
    ;
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, k 38g, l 38g, and m 38g.

Constructors

41a ⟨cycle data class 40e⟩+≡ (40b) ◁40e 41b▷

```
cycle_data::cycle_data(const ex & C)
{
    if (is_a<cycle>(C)) {
        cycle C_new=ex_to<cycle>(C).normalize();
        k=C_new.get_k();
        l=C_new.get_l();
        m=C_new.get_m();
    } else if (is_a<cycle_data>(C))
        *this=ex_to<cycle_data>(C);
    else
        throw(std::invalid_argument("cycle_data(): accept only cycle or cycle_data"
                                    " as the parameter"));

}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, and m 38g.

Constructors

41b ⟨cycle data class 40e⟩+≡ (40b) ◁41a 41c▷

```
cycle_data::cycle_data(const ex & k1, const ex l1, const ex &m1, bool normalize) : k(k1), l(l1), m(m1)
{
    if (normalize) {
        ex ratio = 0;
        if (¬k.is_zero()) // First non-zero coefficient among k, m, l_0, l_1, ... is set to 1
            ratio = k;
        else if (¬m.is_zero())
            ratio = m;
        else {
            for (int i=0; i<get_dim(); i++)
                if (¬l.subs(l.op(1) ≡ i).is_zero()) {
                    ratio = l.subs(l.op(1) ≡ i);
                    break;
                }
        }

        if (¬ratio.is_zero()) {
            k=k÷ratio;
            l=indexed((l.op(0)÷ratio).evalm().normal(), l.op(1));
            m=(m÷ratio).normal();
        }
    }
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, get_dim() 24f, k 38g, l 38g, m 38g, op 37f, and subs 37f.

41c ⟨cycle data class 40e⟩+≡ (40b) ◁41b 42a▷

```
return_type_t cycle_data::return_type_tinfo() const
{
    return make_return_type_t<cycle_data>();
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e.

42a ⟨cycle data class 40e⟩+≡ (40b) ◁41c 42b▷
```
int cycle_data::compare_same_type(const basic &other) const
{
        GINAC_ASSERT(is_a<cycle_data>(other));
        return inherited::compare_same_type(other);
}
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.

42b ⟨cycle data class 40e⟩+≡ (40b) ◁42a 42c▷
```
void cycle_data::do_print(const print_dflt & con, unsigned level) const
{
    con.s << "("; \
    k.print(con, level);
    con.s << ", ";
    l.print(con, level);
    con.s << ", ";
    m.print(con, level);
    con.s << ")";
}
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
Uses k 38g, l 38g, and m 38g.

42c ⟨cycle data class 40e⟩+≡ (40b) ◁42b 42d▷
```
void cycle_data::archive(archive_node &n) const
{
    inherited::archive(n);
    n.add_ex("k-val", k);
    n.add_ex("l-val", l);
    n.add_ex("m-val", m);
}
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
Uses archive 37f, k 38g, l 38g, and m 38g.

42d ⟨cycle data class 40e⟩+≡ (40b) ◁42c 42e▷
```
void cycle_data::read_archive(const archive_node &n, lst &sym_lst)
{
    inherited::read_archive(n, sym_lst);
    n.find_ex("k-val", k, sym_lst);
    n.find_ex("l-val", l, sym_lst);
    n.find_ex("m-val", m, sym_lst);
}
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.
Uses k 38g, l 38g, m 38g, and read_archive 37f.

42e ⟨cycle data class 40e⟩+≡ (40b) ◁42d 43a▷
```
GINAC_BIND_UNARCHIVER(cycle_data);
```

Defines:
cycle_data, used in chunks 16d, 34b, 40, 41, 43–46, 50a, 55–58, 61, 67, 69–71, 73d, 75c, 79c, 81b, 82b, 95a, 99b, and 100b.

43a ⟨cycle data class 40e⟩+≡ (40b) ◁42e 43b▷

```
ex cycle_data::op(size_t i) const
{
 GINAC_ASSERT(i<nops());
   switch(i) {
   case 0:
      return k;
   case 1:
      return l;
   case 2:
      return m;
   default:
      throw(std::invalid_argument("cycle_data::op(): requested operand out of the range (3)"));
   }
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, m 38g, nops 37f, and op 37f.

43b ⟨cycle data class 40e⟩+≡ (40b) ◁43a 43c▷

```
ex & cycle_data::let_op(size_t i)
{
   ensure_if_modifiable();
   GINAC_ASSERT(i<nops());
   switch(i) {
   case 0:
      return k;
   case 1:
      return l;
   case 2:
      return m;
   default:
    throw(std::invalid_argument("cycle_data::let_op(): requested operand out of the range (3)"));
   }
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, m 38g, and nops 37f.

43c ⟨cycle data class 40e⟩+≡ (40b) ◁43b 44a▷

```
ex cycle_data::get_cycle(const ex & metr) const
{
   return cycle(k,l,m,metr);
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, get_cycle 24g 24h, k 38g, l 38g, and m 38g.

44a ⟨cycle data class 40e⟩+≡ (40b) ◁43c 44b▷

```
bool cycle_data::is_equal(const basic & other, bool projectively) const
{
    if (not is_a<cycle_data>(other))
        return false;
    const cycle_data o = ex_to<cycle_data>(other);
    ex factor=0, ofactor=0;

    if (projectively) {
        // Check that coefficients are scalar multiples of other
        if (not ((m*o.get_k()-o.get_m()*k).normal().is_zero()))
            return false;
        // Set up coefficients for proportionality
        if (get_k().normal().is_zero()) {
            factor=get_m();
            ofactor=o.get_m();
        } else {
            factor=get_k();
            ofactor=o.get_k();
        }

    } else
        // Check the exact equality of coefficients
        if (not ((get_k()-o.get_k()).normal().is_zero()
                 ∧ (get_m()-o.get_m()).normal().is_zero()))
            return false;
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, and m 38g.

Now we iterate through the coefficients of l.

44b ⟨cycle data class 40e⟩+≡ (40b) ◁44a 45a▷

```
    for (int i=0; i<get_dim(); i++)
        if (projectively) {
            // search the the first non-zero coefficient
            if (factor.is_zero()) {
                factor=get_l(i);
                ofactor=o.get_l(i);
            } else
                if (¬ (get_l(i)*ofactor-o.get_l(i)*factor).normal().is_zero())
                    return false;
        } else
            if (¬ (get_l(i)-o.get_l(i)).normal().is_zero())
                return false;

    return true;
}
```

Uses get_dim() 24f.

45a ⟨cycle data class 40e⟩+≡ (40b) ◁44b 45b▷
```
bool cycle_data::is_almost_equal(const basic & other, bool projectively) const
{
    if (not is_a<cycle_data>(other))
        return false;
    const cycle_data o = ex_to<cycle_data>(other);
    ex factor=0, ofactor=0;

    if (projectively) {
        // Check that coefficients are scalar multiples of other
        if (¬ (is_less_than_epsilon(m*o.get_k()-o.get_m()*k)))
            return false;
        // Set up coefficients for proportionality
        if (is_less_than_epsilon(get_k())) {
            factor=get_m();
            ofactor=o.get_m();
        } else {
            factor=get_k();
            ofactor=o.get_k();
        }

    } else
        // Check the exact equality of coefficients
        if (¬ (is_less_than_epsilon((get_k()-o.get_k()))
                ∧ is_less_than_epsilon(get_m()-o.get_m())))
            return false;
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, is_almost_equal 98c, is_less_than_epsilon 40d, k 38g, and m 38g.

Now we iterate through the coefficients of l.

45b ⟨cycle data class 40e⟩+≡ (40b) ◁45a 45c▷
```
    for (int i=0; i<get_dim(); i++)
        if (projectively) {
            // search the the first non-zero coefficient
            if (factor.is_zero()) {
                factor=get_l(i);
                ofactor=o.get_l(i);
            } else
                if (¬ is_less_than_epsilon(get_l(i)*ofactor-o.get_l(i)*factor))
                    return false;
        } else
            if (¬ is_less_than_epsilon(get_l(i)-o.get_l(i)))
                return false;

    return true;
}
```

Uses get_dim() 24f and is_less_than_epsilon 40d.

45c ⟨cycle data class 40e⟩+≡ (40b) ◁45b 45d▷
```
cycle_data cycle_data::subs(const ex & e, unsigned options) const
{
    return cycle_data(k.subs(e,options),l.subs(e,options),m.subs(e,options),false);
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, m 38g, and subs 37f.

45d ⟨cycle data class 40e⟩+≡ (40b) ◁45c 46a▷
```
ex cycle_data::subs(const exmap & em, unsigned options) const
{
    return cycle_data(k.subs(em,options),l.subs(em,options),m.subs(em,options),false);
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, m 38g, and subs 37f.

46a ⟨cycle data class 40e⟩+≡ (40b) ◁45d
```
ex cycle_data::num_normalize() const
{
    if (¬ (is_a<numeric>(k) ∧ is_a<numeric>(m)
          ∧ is_a<numeric>(l.op(0).op(0)) ∧ is_a<numeric>(l.op(0).op(1))))
        return cycle_data(k,l,m,true);

    numeric k1=ex_to<numeric>(k),
        m1=ex_to<numeric>(m);
    numeric r=max(abs(k1),abs(m1));
    for (int i=0; i<get_dim(); ++i)
        r=max(r,abs(ex_to<numeric>(l.op(0).op(i))));

    if (is_less_than_epsilon(r))
        return cycle_data(k,l,m,true);
    k1÷=r; k1=(is_less_than_epsilon(k1)?0:k1);
    m1÷=r; m1=(is_less_than_epsilon(m1)?0:m1);
    lst l0;
    for (int i=0; i<get_dim(); ++i) {
        numeric li= ex_to<numeric>(l.op(0).op(i))÷r;
        l0.append(is_less_than_epsilon(li)?0:li);
    }

    return cycle_data(k1,indexed(matrix(1, get_dim(), l0), l.op(1)),m1);
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, get_dim() 24f, is_less_than_epsilon 40d, k 38g, l 38g, m 38g, numeric 12f, and op 37f.

F.2. Implementation of cycle_relation class.

46b ⟨cycle relation class 46b⟩≡ (40b) 46c▷
```
cycle_relation::cycle_relation() : parkey(), parameter()
{
  rel = cycle_orthogonal;
  use_cycle_metric = true;
}
```

Uses cycle_orthogonal 23d 94c and cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b.

46c ⟨cycle relation class 46b⟩+≡ (40b) ◁46b 46d▷
```
cycle_relation::cycle_relation(const ex & k, PCR r, bool cm, const ex & p) {
    parkey = k;
    rel = r;
    use_cycle_metric = cm;
    parameter=p;
}
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, k 38g, and PCR 33d.

46d ⟨cycle relation class 46b⟩+≡ (40b) ◁46c 47▷
```
return_type_t cycle_relation::return_type_tinfo() const
{
    return make_return_type_t<cycle_relation>();
}
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b.

47 ⟨cycle relation class 46b⟩+≡ (40b) ◁46d 48▷

```
int cycle_relation::compare_same_type(const basic &other) const
{
        GINAC_ASSERT(is_a<cycle_relation>(other));
        return inherited::compare_same_type(other);
        ÷∗
  const cycle_relation &o = static_cast<const cycle_relation &>(other);
    if ((parkey ≡ o.parkey) ∧ (&rel ≡ &o.rel))
        return 0;
    else if ((parkey < o.parkey) ∨ (&rel < &o.rel))
        return -1;
    else
    return 1;∗÷
}
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.

(un)Archiving of **cycle_relation** is not universal. At present it only can handle relations declared in the header file: *cycle_orthogonal*, *cycle_f_orthogonal*, *cycle_adifferent*, *cycle_different* and *cycle_tangent*.

48 ⟨cycle relation class 46b⟩+≡ (40b) ◁47 49a▷

```
void cycle_relation::archive(archive_node &n) const
{
    inherited::archive(n);
    n.add_ex("cr-parkey", parkey);
    n.add_bool("use_cycle_metric", use_cycle_metric);
    n.add_ex("parameter", parameter);
    ex (*const* ptr)(const ex &, const ex &, const ex &)
        = rel.target<ex(*)(const ex&, const ex &,const ex&)>();
    if (ptr ∧ *ptr ≡ cycle_orthogonal)
        n.add_string("relation", "orthogonal");
    else if (ptr ∧ *ptr ≡ cycle_f_orthogonal)
        n.add_string("relation", "f_orthogonal");
    else if (ptr ∧ *ptr ≡ cycle_different)
        n.add_string("relation", "different");
    else if (ptr ∧ *ptr ≡ cycle_adifferent)
        n.add_string("relation", "adifferent");
    else if (ptr ∧ *ptr ≡ cycle_tangent)
        n.add_string("relation", "tangent");
    else if (ptr ∧ *ptr ≡ cycle_tangent_i)
        n.add_string("relation", "tangent_i");
    else if (ptr ∧ *ptr ≡ cycle_tangent_o)
        n.add_string("relation", "tangent_o");
    else if (ptr ∧ *ptr ≡ cycle_angle)
        n.add_string("relation", "angle");
    else if (ptr ∧ *ptr ≡ steiner_power)
        n.add_string("relation", "steiner_power");
    else if (ptr ∧ *ptr ≡ cycle_cross_t_distance)
        n.add_string("relation", "cross_distance");
    else if (ptr ∧ *ptr ≡ product_sign)
        n.add_string("relation", "product_sign");
    else if (ptr ∧ *ptr ≡ coefficients_are_real)
        n.add_string("relation", "are_real");
    else if (ptr ∧ *ptr ≡ cycle_moebius)
        n.add_string("relation", "moebius");
    else if (ptr ∧ *ptr ≡ cycle_sl2)
        n.add_string("relation", "sl2");
    else
      throw(std::invalid_argument("cycle_relation::archive(): archiving of this relation is not"
                                  " implemented"));
}
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses archive 37f, coefficients_are_real 24c 97b, cycle_adifferent 24a 95a, cycle_angle 34e 96d, cycle_cross_t_distance 34e 97a, cycle_different 23g 96b, cycle_f_orthogonal 23e 94d, cycle_moebius 35a 97e, cycle_orthogonal 23d 94c, cycle_sl2 35a 98b, cycle_tangent 34e 95c, cycle_tangent_i 34e 96a, cycle_tangent_o 34e 95d, ex 40c, product_sign 24b 96c, and steiner_power 34e 96e.

49a ⟨cycle relation class 46b⟩+≡ (40b) ◁48 49b▷

```
void cycle_relation::read_archive(const archive_node &n, lst &sym_lst)
{
    ex e;
    inherited::read_archive(n, sym_lst);
    n.find_ex("cr-parkey", e, sym_lst);
    if (is_a<symbol>(e))
        parkey=e;
    else
        throw(std::invalid_argument("cycle_relation::read_archive(): read a non-symbol as"
                                    " a parkey from the archive"));
    n.find_ex("parameter", parameter, sym_lst);
    n.find_bool("use_cycle_metric", use_cycle_metric);
    string relation;
    n.find_string("relation", relation);
    if (relation == "orthogonal")
        rel = cycle_orthogonal;
    else if (relation == "f_orthogonal")
        rel = cycle_f_orthogonal;
    else if (relation == "different")
        rel = cycle_different;
    else if (relation == "adifferent")
        rel = cycle_adifferent;
    else if (relation == "tangent")
        rel = cycle_tangent;
    else if (relation == "tangent_i")
        rel = cycle_tangent_i;
    else if (relation == "tangent_o")
        rel = cycle_tangent_o;
    else if (relation == "angle")
        rel = cycle_angle;
    else if (relation == "steiner_power")
        rel = steiner_power;
    else if (relation == "cross_distance")
        rel = cycle_cross_t_distance;
    else if (relation == "product_sign")
        rel = product_sign;
    else if (relation == "are_real")
        rel = coefficients_are_real;
    else if (relation == "moebius")
        rel = cycle_moebius;
    else if (relation == "sl2")
        rel = cycle_sl2;
    else
        throw(std::invalid_argument("cycle_relation::read_archive(): archive contains unknown"
                                    " relation"));
}
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses archive 37f, coefficients_are_real 24c 97b, cycle_adifferent 24a 95a, cycle_angle 34e 96d, cycle_cross_t_distance 34e 97a, cycle_different 23g 96b, cycle_f_orthogonal 23e 94d, cycle_moebius 35a 97e, cycle_orthogonal 23d 94c, cycle_sl2 35a 98b, cycle_tangent 34e 95c, cycle_tangent_i 34e 96a, cycle_tangent_o 34e 95d, ex 40c, product_sign 24b 96c, read_archive 37f, and steiner_power 34e 96e.

49b ⟨cycle relation class 46b⟩+≡ (40b) ◁49a 50a▷

```
GINAC_BIND_UNARCHIVER(cycle_relation);
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.

50a ⟨cycle relation class 46b⟩+≡ (40b) ◁49b 50b▷
```
ex cycle_relation::rel_to_parent(const cycle_data & C1, const ex & pmetric, const ex & cmetric,
                                 const exhashmap<cycle_node> & N) const
{
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, and ex 40c.

First we check if the required key exists in the cycles list. If there is no such key, we return the relation to the calling cycle itself.

50b ⟨cycle relation class 46b⟩+≡ (40b) ◁50a 50c▷
```
    exhashmap<cycle_node>::const_iterator cnode=N.find(parkey);
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

Otherwise the list of equations is constructed for the found key.

50c ⟨cycle relation class 46b⟩+≡ (40b) ◁50b 51a▷
```
    lst res,
        cycles=ex_to<lst>(cnode→second.get_cycle(use_cycle_metric? cmetric : pmetric));

    for (const auto& it : cycles) {
      lst calc=ex_to<lst>(rel(C1.get_cycle(use_cycle_metric? cmetric : pmetric), ex_to<cycle>(it), parameter));
        for (const auto& it1 : calc)
            res.append(it1);
    }
    return res;
}
```

Uses get_cycle 24g 24h.

51a ⟨cycle relation class 46b⟩+≡ (40b) ◁50c 51b▷

```
void cycle_relation::do_print(const print_dflt & con, unsigned level) const
{
    con.s ≪ parkey ≪ (use_cycle_metric? "|" : "/");
    ex (*const* ptr)(const ex &, const ex &, const ex &)
        = rel.target<ex(*)(const ex&, const ex &, const ex &)>();
    if (ptr ∧ *ptr ≡ cycle_orthogonal)
        con.s ≪ "o";
    else if (ptr ∧ *ptr ≡ cycle_f_orthogonal)
        con.s ≪ "f";
    else if (ptr ∧ *ptr ≡ cycle_different)
        con.s ≪ "d";
    else if (ptr ∧ *ptr ≡ cycle_adifferent)
        con.s ≪ "ad";
    else if (ptr ∧ *ptr ≡ cycle_tangent)
        con.s ≪ "t";
    else if (ptr ∧ *ptr ≡ cycle_tangent_i)
        con.s ≪ "ti";
    else if (ptr ∧ *ptr ≡ cycle_tangent_o)
        con.s ≪ "to";
    else if (ptr ∧ *ptr ≡ steiner_power)
        con.s ≪ "s";
    else if (ptr ∧ *ptr ≡ cycle_angle)
        con.s ≪ "a";
    else if (ptr ∧ *ptr ≡ cycle_cross_t_distance)
        con.s ≪ "c";
    else if (ptr ∧ *ptr ≡ product_sign)
        con.s ≪ "p";
    else if (ptr ∧ *ptr ≡ coefficients_are_real)
        con.s ≪ "r";
    else if (ptr ∧ *ptr ≡ cycle_moebius)
        con.s ≪ "m";
    else if (ptr ∧ *ptr ≡ cycle_sl2)
        con.s ≪ "l";
    else
        con.s ≪ "u"; // unknown type of relations
    if (¬ parameter.is_zero())
        con.s ≪ "[" ≪ parameter ≪ "]";
}
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.
Uses coefficients_are_real 24c 97b, cycle_adifferent 24a 95a, cycle_angle 34e 96d, cycle_cross_t_distance 34e 97a, cycle_different 23g 96b, cycle_f_orthogonal 23e 94d, cycle_moebius 35a 97e, cycle_orthogonal 23d 94c, cycle_sl2 35a 98b, cycle_tangent 34e 95c, cycle_tangent_i 34e 96a, cycle_tangent_o 34e 95d, ex 40c, l 38g, m 38g, product_sign 24b 96c, and steiner_power 34e 96e.

51b ⟨cycle relation class 46b⟩+≡ (40b) ◁51a 52a▷

```
void cycle_relation::do_print_tree(const print_tree & con, unsigned level) const
{
    //  inherited::do_print_tree(con,level);
    parkey.print(con,level+con.delta_indent);
    //  con.s <<  std::string(level+con.delta_indent, ' ') << (int)rel <<endl;
}
```

Defines:
cycle_relation, used in chunks 27–29, 31b, 33c, 34a, 40a, 46, 50a, 52, 57–59, 67a, 69, 70a, 80c, 81b, and 98–100.

52a ⟨cycle relation class 46b⟩+≡ (40b) ◁51b 52b▷

```
ex cycle_relation::op(size_t i) const
{
 GINAC_ASSERT(i<nops());
   switch(i) {
   case 0:
      return parkey;
   case 1:
      return parameter;
   default:
    throw(std::invalid_argument("cycle_relation::op(): requested operand out of the range (1)"));
   }
}
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, nops 37f, and op 37f.

52b ⟨cycle relation class 46b⟩+≡ (40b) ◁52a

```
ex & cycle_relation::let_op(size_t i)
{
   ensure_if_modifiable();
   GINAC_ASSERT(i<nops());
   switch(i) {
   case 0:
      return parkey;
   case 1:
      return parameter;
   default:
    throw(std::invalid_argument("cycle_relation::let_op(): requested operand out of the range (1)"));
   }
}
```

Uses cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, and nops 37f.

F.3. Implementation of subfigure class.

52c ⟨subfigure class 52c⟩≡ (40b) 52d▷

```
subfigure::subfigure() : inherited()
{
}
```

Uses subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

52d ⟨subfigure class 52c⟩+≡ (40b) ◁52c 52e▷

```
subfigure::subfigure(const ex & F, const ex & l) {
   parlist = ex_to<lst>(l);
   subf = F;
}
```

Uses ex 40c, l 38g, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

52e ⟨subfigure class 52c⟩+≡ (40b) ◁52d 53a▷

```
return_type_t subfigure::return_type_tinfo() const
{
   return make_return_type_t<subfigure>();
}
```

Uses subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

53a ⟨subfigure class 52c⟩+≡ (40b) ◁52e 53b▷
```
int subfigure::compare_same_type(const basic &other) const
{
        GINAC_ASSERT(is_a<subfigure>(other));
        return inherited::compare_same_type(other);
}
```

Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.

(un)Archiving of **subfigure** is not universal. At present it only can handle relations declared in the header file: *cycle_orthogonal* and *cycle_f_orthogonal*.

53b ⟨subfigure class 52c⟩+≡ (40b) ◁53a 53c▷
```
void subfigure::archive(archive_node &n) const
{
    inherited::archive(n);
    n.add_ex("parlist", ex_to<lst>(parlist));
    n.add_ex("subf", ex_to<figure>(subf));
}
```

Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.
Uses archive 37f and figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

53c ⟨subfigure class 52c⟩+≡ (40b) ◁53b 53d▷
```
void subfigure::read_archive(const archive_node &n, lst &sym_lst)
{
    ex e;
    inherited::read_archive(n, sym_lst);
    n.find_ex("parlist", e, sym_lst);
    if (is_a<lst>(e))
        parlist=ex_to<lst>(e);
    else
        throw(std::invalid_argument("subfigure::read_archive(): read a non-lst as a parlist from"
                                    " the archive"));
    n.find_ex("subf", e, sym_lst);
    if (is_a<figure>(e))
        subf=ex_to<figure>(e);
    else
        throw(std::invalid_argument("subfigure::read_archive(): read a non-figure as a subf from"
                                    " the archive"));
}
```

Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.
Uses archive 37f, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and read_archive 37f.

53d ⟨subfigure class 52c⟩+≡ (40b) ◁53c 53e▷
```
GINAC_BIND_UNARCHIVER(subfigure);
```

Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.

53e ⟨subfigure class 52c⟩+≡ (40b) ◁53d 54a▷
```
void subfigure::do_print(const print_dflt & con, unsigned level) const
{
    con.s << "subfig( " ;
        parlist.print(con, level+1);
        //        subf.print(con, level+1);
    con.s << ")" ;
}
```

Defines:
subfigure, used in chunks 31d, 40a, 52, 54a, 57e, 58a, 70b, 81d, and 82a.

54a ⟨subfigure class 52c⟩+≡ (40b) ◁53e
```
inline ex subfigure::subs(const exmap & em, unsigned options) const {
    return subfigure(subf.subs(em,options | do_not_update_subfigure), parlist);
}
```

Uses do_not_update_subfigure 39c, ex 40c, subfigure 29c 36a 36c 53a 53b 53c 53d 53e, and subs 37f.

F.4. **Implementation of cycle_node class.** Default constructor.

54b ⟨cycle node class 54b⟩≡ (40b) 54c▷
```
cycle_node::cycle_node()
{
    generation=0;
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

Create a **cycle_node** out of **cycle** or **cycle_node**.

54c ⟨cycle node class 54b⟩+≡ (40b) ◁54b 54e▷
```
cycle_node::cycle_node(const ex & C, int g)
{
    generation=g;
    ⟨set cycle data to the node 54d⟩
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and ex 40c.

We use this check to initialise or change cycle info of the node.

54d ⟨set cycle data to the node 54d⟩≡ (54c)
```
    if (is_a<cycle_node>(C)) {
        cycles=ex_to<lst>(ex_to<cycle_node>(C).get_cycles());
        generation = ex_to<cycle_node>(C).get_generation();
        children = ex_to<cycle_node>(C).get_children();
        parents = ex_to<cycle_node>(C).get_parents();
    } else
        ⟨check cycles is valid 55a⟩
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

54e ⟨cycle node class 54b⟩+≡ (40b) ◁54c 55c▷
```
cycle_node::cycle_node(const ex & C, int g, const lst & par)
{
    generation=g;
    ⟨check cycles is valid 55a⟩
    ⟨check parents is valid 55b⟩
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and ex 40c.

55a ⟨check cycles is valid 55a⟩≡ (54 55 57a)

```
if (is_a<lst>(C)) {
    for (const auto& it : ex_to<lst>(C))
        if ( is_a<cycle_data>(it) ∨ is_a<cycle>(it))
            cycles.append(cycle_data(it));
        else
            throw(std::invalid_argument("cycle_node::cycle_node(): "
                                        "the parameter is list of something which is not"
                                        " cycle_data"));
} else if (is_a<cycle_data>(C)) {
    cycles = lst(C);
} else if (is_a<cycle>(C)) {
    cycles=lst(cycle_data(ex_to<cycle>(C).get_k(), ex_to<cycle>(C).get_l(),
                          ex_to<cycle>(C).get_m()));
} else
    throw(std::invalid_argument("cycle_node::cycle_node(): "
                                "the first parameters must be either cycle, cycle_data,"
                                " cycle_node or list of cycle_data"));
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e and cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

55b ⟨check parents is valid 55b⟩≡ (54 55)

```
GINAC_ASSERT(is_a<lst>(par));
parents = ex_to<lst>(par);
```

55c ⟨cycle node class 54b⟩+≡ (40b) ◁54e 55d▷

```
cycle_node::cycle_node(const ex & C, int g, const lst & par, const lst & ch)
{
    generation=g;
    children=ch;
    ⟨check cycles is valid 55a⟩
    ⟨check parents is valid 55b⟩
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and ex 40c.

55d ⟨cycle node class 54b⟩+≡ (40b) ◁55c 55e▷

```
cycle_node::cycle_node(const ex & C, int g, const lst & par, const lst & ch, string ca)
{
    generation=g;
    children=ch;
    custom_asy=ca;
    ⟨check cycles is valid 55a⟩
    ⟨check parents is valid 55b⟩
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and ex 40c.

55e ⟨cycle node class 54b⟩+≡ (40b) ◁55d 56a▷

```
return_type_t cycle_node::return_type_tinfo() const
{
    return make_return_type_t<cycle_node>();
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

56a ⟨cycle node class 54b⟩+≡ (40b) ◁55e 56b▷

```
ex cycle_node::op(size_t i) const
{
    GINAC_ASSERT(i<nops());
    size_t ncyc=cycles.nops(), nchil=children.nops(), npar=parents.nops();
    if ( i < ncyc)
        return cycles.op(i);
    else if ( i < ncyc + nchil)
        return children.op(i-ncyc);
    else if ( i < ncyc + nchil + npar)
        return parents.op(i-ncyc-nchil);
    else
        throw(std::invalid_argument("cycle_node::op(): requested operand out of the range"));
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, nops 37f, and op 37f.

56b ⟨cycle node class 54b⟩+≡ (40b) ◁56a 56c▷

```
ex & cycle_node::let_op(size_t i)
{
    ensure_if_modifiable();
    GINAC_ASSERT(i<nops());
    size_t ncyc=cycles.nops(), nchil=children.nops(), npar=parents.nops();
    if ( i < ncyc)
        return cycles.let_op(i);
    else if ( i < ncyc + nchil)
        return children.let_op(i-ncyc);
    else if ( i < ncyc + nchil + npar)
        return parents.let_op(i-ncyc-nchil);
    else
        throw(std::invalid_argument("cycle_node::let_op(): requested operand out of the range"));
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, and nops 37f.

56c ⟨cycle node class 54b⟩+≡ (40b) ◁56b 56d▷

```
int cycle_node::compare_same_type(const basic &other) const
{
    GINAC_ASSERT(is_a<cycle_node>(other));
    return inherited::compare_same_type(other);
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.

If neither of parameters has multiply values we return a cycle.

56d ⟨cycle node class 54b⟩+≡ (40b) ◁56c 57a▷

```
ex cycle_node::get_cycle(const ex & metr) const
{
    lst res;
    for (const auto&  it : cycles)
        res.append(ex_to<cycle_data>(it).get_cycle(metr));
    return res;
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, and get_cycle 24g 24h.

57a ⟨cycle node class 54b⟩+≡ (40b) ◁56d 57b▷

```
void cycle_node::set_cycles(const ex & C)
{
    cycles.remove_all();
    ⟨check cycles is valid 55a⟩
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses ex 40c.

57b ⟨cycle node class 54b⟩+≡ (40b) ◁57a 57c▷

```
void cycle_node::append_cycle(const ex & k, const ex & l, const ex & m)
{
    cycles.append(cycle_data(k,l,m));
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, k 38g, l 38g, and m 38g.

57c ⟨cycle node class 54b⟩+≡ (40b) ◁57b 57d▷

```
void cycle_node::append_cycle(const ex & C)
{
    if (is_a<cycle>(C))
        cycles.append(cycle_data(ex_to<cycle>(C).get_k(), ex_to<cycle>(C).get_l(),
                                 ex_to<cycle>(C).get_m()));
    else    if (is_a<cycle_data>(C))
        cycles.append(ex_to<cycle_data>(C));
    else
        throw(std::invalid_argument("cycle_node::append_cycle(const ex &): the parameter must be"
                                    " either cycle or cycle_data"));
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e and ex 40c.

Return the list of parents—either *cycle_relations* or **subfigure**

57d ⟨cycle node class 54b⟩+≡ (40b) ◁57c 57e▷

```
lst cycle_node::get_parents() const
{
    return parents;
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c.

The method returns the list of all keys to parant cycles.

57e ⟨cycle node class 54b⟩+≡ (40b) ◁57d 58a▷

```
lst cycle_node::get_parent_keys() const
{
    lst pkeys;
    if ( (parents.nops() ≡ 1) ∧ (is_a<subfigure>(parents.op(0))) {
        pkeys=ex_to<lst>(ex_to<subfigure>(parents.op(0)).get_parlist());
    } else {
        for (const auto& it : parents)
            pkeys.append(ex_to<cycle_relation>(it).get_parkey());
    }
    return pkeys;
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, nops 37f, op 37f, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

58a ⟨cycle node class 54b⟩+≡ (40b) ◁57e 58b▷

```
void cycle_node::do_print(const print_dflt & con, unsigned level) const
{
    con.s ≪ '{';
    for (const auto& it : cycles) {
        ex_to<cycle_data>(it).do_print(con, level);
        con.s ≪ ", ";
    }
    con.s ≪ generation ≪ '}' ≪ " --> (";
    // list all children
    for (lst::const_iterator it = children.begin(); it ≠ children.end();) {
        con.s ≪ (∗it);
        ++it;
        if (it ≠ children.end())
            con.s ≪",";
    }

    // list all parents
    con.s ≪ ");  <-- (";
        if (generation > 0 ∨ FIGURE_DEBUG)
        for (lst::const_iterator it = parents.begin(); it ≠ parents.end();) {
            if (is_a<cycle_relation>(∗it))
                ex_to<cycle_relation>(∗it).do_print(con,level);
            else if (is_a<subfigure>(∗it))
                ex_to<subfigure>(∗it).do_print(con,level);
            ++it;
            if (it ≠ parents.end())
                con.s ≪",";
    }
    con.s ≪ ")" ≪ endl;
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, FIGURE_DEBUG 39d, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

58b ⟨cycle node class 54b⟩+≡ (40b) ◁58a 58c▷

```
void cycle_node::do_print_tree(const print_tree & con, unsigned level) const
{
    for (const auto& it : cycles)
        it.print(con, level);
    con.s ≪ std::string(level+con.delta_indent, ' ') ≪ "generation: "≪ generation ≪ endl;
    con.s ≪ std::string(level+con.delta_indent, ' ') ≪ "children" ≪endl;
    children.print(con,level+2∗con.delta_indent);
    con.s ≪ std::string(level+con.delta_indent, ' ') ≪ "parents" ≪endl;
    parents.print(con,level+2∗con.delta_indent);
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.

58c ⟨cycle node class 54b⟩+≡ (40b) ◁58b 59a▷

```
void cycle_node::remove_child(const ex & other)
{
    lst nchildren;
    for (const auto& it : children)
        if (it ≠ other)
            nchildren.append(it);
    children=nchildren;
}
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses ex 40c.

59a ⟨cycle node class 54b⟩+≡ (40b) ◁58c 59b▷

```
cycle_node cycle_node::subs(const ex & e, unsigned options) const
{
    exmap em;
    if (e.info(info_flags::list)) {
        lst l = ex_to<lst>(e);
        for (const auto& i : l)
            em.insert(std::make_pair(i.op(0), i.op(1)));
    } else if (is_a<relational>(e)) {
        em.insert(std::make_pair(e.op(0), e.op(1)));
    } else
     throw(std::invalid_argument("cycle::subs(): the parameter should be a relational or a lst"));

    return ex_to<cycle_node>(subs(em, options));
}
```

Uses `cycle_node` 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, `ex` 40c, `info` 37f, `l` 38g, `op` 37f, and `subs` 37f.

59b ⟨cycle node class 54b⟩+≡ (40b) ◁59a 59c▷

```
ex cycle_node::subs(const exmap & em, unsigned options) const
{
     return cycle_node(cycles.subs(em, options), generation, ex_to<lst>(parents.subs(em, options)), children, custom_asy);
}
```

Uses `cycle_node` 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, `ex` 40c, and `subs` 37f.

59c ⟨cycle node class 54b⟩+≡ (40b) ◁59b 59d▷

```
void cycle_node::archive(archive_node &n) const
{
    inherited::archive(n);
    n.add_ex("cycles", cycles);
    n.add_unsigned("children_size", children.nops());
    if (children.nops()>0)
        for (const auto& it : children)
            n.add_ex("chil", it);

    n.add_unsigned("parent_size", parents.nops());
    if (parents.nops()>0) {
        n.add_bool("has_subfigure", false);
        for (const auto& it : parents)
            n.add_ex("par", ex_to<cycle_relation>(it));
    }
```

Defines:
`cycle_node`, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses `archive` 37f, `cycle_relation` 29b 33e 34c 47 48 49a 49b 51a 51b, and `nops` 37f.

storing the generation with its sign.

59d ⟨cycle node class 54b⟩+≡ (40b) ◁59c 60a▷

```
    bool neg_generation=(generation<0);
    n.add_bool("neg_generation", neg_generation);
    if (neg_generation)
        n.add_unsigned("abs_generation", -generation);
    else
        n.add_unsigned("abs_generation", generation);
}
```

60a ⟨cycle node class 54b⟩+≡ (40b) ◁59d 60b▷

```
void cycle_node::read_archive(const archive_node &n, lst &sym_lst)
{
    inherited::read_archive(n, sym_lst);
    ex e;
    n.find_ex("cycles", e, sym_lst);
    cycles=ex_to<lst>(e);
    ex ch, par;
    unsigned int c_size;
    n.find_unsigned("children_size", c_size);

    if (c_size>0) {
        archive_node::archive_node_cit first = n.find_first("chil");
        archive_node::archive_node_cit last = n.find_last("chil");
        ++last;
        for (archive_node::archive_node_cit i=first; i ≠ last; ++i) {
            ex e;
            n.find_ex_by_loc(i, e, sym_lst);
            children.append(e);
        }
    }

    unsigned int p_size;
    n.find_unsigned("parent_size", p_size);

    if (p_size>0) {
        archive_node::archive_node_cit first = n.find_first("par");
        archive_node::archive_node_cit last = n.find_last("par");
        ++last;
        for (archive_node::archive_node_cit i=first; i ≠ last; ++i) {
            ex e;
            n.find_ex_by_loc(i, e, sym_lst);
            parents.append(e);
        }
    }
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.
Uses ex 40c and read_archive 37f.

restoring the generation with its sign

60b ⟨cycle node class 54b⟩+≡ (40b) ◁60a 60c▷

```
    bool neg_generation;
    n.find_bool("neg_generation", neg_generation);
    unsigned int abs_generation;
    n.find_unsigned("abs_generation", abs_generation);
    if (neg_generation)
        generation = -abs_generation;
    else
        generation = abs_generation;
}
```

60c ⟨cycle node class 54b⟩+≡ (40b) ◁60b

```
GINAC_BIND_UNARCHIVER(cycle_node);
```

Defines:
cycle_node, used in chunks 21c, 32–34, 36–38, 40a, 50, 54–57, 59, 61, 62c, 65a, 67, 69c, 70b, 73a, 82, 83d, 89, 90, and 92c.

F.5. **Implementation of figure class.** Since this is the main class of the library, its implementation is most evolved.

F.5.1. **figure** *conctructors.* We create a figure with two initial objects: the cycle at infinity and the real line.

61a ⟨figure class 61a⟩≡ (40b) 61e▷
```
figure::figure() : inherited(), k(realsymbol("k")), m(realsymbol("m")), l()
{
    l.append(realsymbol("l0"));
    l.append(realsymbol("l1"));
    infinity=symbol("infty","\\infty");
    real_line=symbol("R","\\mathbf{R}");
  point_metric = clifford_unit(varidx(real_line, 2), indexed(-(new tensdelta)→setflag(status_flags::dynallocated),
                                                             sy_symm(), varidx(symbol("i"), 2), varidx(symbol("j"), 2)));
  cycle_metric = clifford_unit(varidx(real_line, 2), indexed(-(new tensdelta)→setflag(status_flags::dynallocated),
                                                             sy_symm(), varidx(symbol("ic"), 2), varidx(symbol("jc"), 2)));
    ⟨set the infinity 61c⟩
    ⟨set the real line 61d⟩
}
```

Uses cycle_metric 38d, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, infinity 38c, k 38g, l 38g, m 38g, point_metric 38d, real_line 38c, and realsymbol 17b.

Dimension of the fiigure is taken and the respective vector is created.

61b ⟨initialise the dimension and vector 61b⟩≡ (61c 64g)
```
int dim=ex_to<numeric>(get_dim()).to_int();
lst l0;
for(int i=0; i<dim; ++i)
    l0.append(0);
```

Uses get_dim() 24f and numeric 12f.

61c ⟨set the infinity 61c⟩≡ (61a 64g 83e)
```
⟨initialise the dimension and vector 61b⟩
nodes[infinity] = cycle_node(cycle_data(numeric(0),indexed(matrix(1, dim, l0),
                                                           varidx(infinity, dim)),numeric(1)),INFINITY_GEN);
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, infinity 38c, INFINITY_GEN 30d 30d, nodes 38e, and numeric 12f.

61d ⟨set the real line 61d⟩≡ (61a 64g 83e)
```
l0.remove_last();
l0.append(1);
nodes[real_line] = cycle_node(cycle_data(numeric(0),indexed(matrix(1, dim, l0),
                                                           varidx(real_line, dim)),numeric(0)),REAL_LINE_GEN);
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, nodes 38e, numeric 12f, real_line 38c, and REAL_LINE_GEN 30d 30d.

This constructor may be called with several different inputs.

61e ⟨figure class 61a⟩+≡ (40b) ◁61a 62c▷
```
figure::figure(const ex & Mp, const ex & Mc) : inherited(), k(realsymbol("k")), m(realsymbol("m")), l()
{
    infinity=symbol("infty","\\infty");
    real_line=symbol("R","\\mathbf{R}");
    bool inf_missing=true, R_missing=true;
    ⟨set point metric in figure 62a⟩
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, infinity 38c, k 38g, l 38g, m 38g, real_line 38c, and realsymbol 17b.

Below are various parameters which can define a metric in the same way as it used to create a *cliffordunit* object in GiNaC.

62a ⟨set point metric in figure 62a⟩≡ (61e 83a) 62b▷

```
if (is_a<clifford>(Mp)) {
    point_metric = clifford_unit(varidx(real_line,
                                        ex_to<idx>(ex_to<clifford>(Mp).get_metric().op(1)).get_dim()),
                                 ex_to<clifford>(Mp).get_metric());
} else if (is_a<matrix>(Mp)) {
    ex D;
    if (ex_to<matrix>(Mp).rows() == ex_to<matrix>(Mp).cols())
        D=ex_to<matrix>(Mp).rows();
    else
        throw(std::invalid_argument("figure::figure(const ex &, const ex &):"
                                    " only square matrices are admitted as point metric"));
    point_metric = clifford_unit(varidx(real_line, D), indexed(Mp, sy_symm(), varidx(symbol("i"), D), varidx(symbol("j"
} else if (is_a<indexed>(Mp)) {
    point_metric = clifford_unit(varidx(real_line, ex_to<idx>(Mp.op(1)).get_dim()), Mp);
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_dim() 24f, op 37f, point_metric 38d, and real_line 38c.

If a **lst** is supplied we use as the signature of metric, entries *Mp* as the diagonal elements of the matrix.

62b ⟨set point metric in figure 62a⟩+≡ (61e 83a) ◁62a

```
} else if (is_a<lst>(Mp)) {
    point_metric=clifford_unit(varidx(real_line, Mp.nops()), indexed(diag_matrix(ex_to<lst>(Mp)), sy_symm(),
                                    varidx(symbol("i"), Mp.nops()), varidx(symbol("j"), Mp.nops())));
}
```

Uses nops 37f, point_metric 38d, and real_line 38c.

If *Mp* is a figure we effectively copy it.

62c ⟨figure class 61a⟩+≡ (40b) ◁61e 63a▷

```
else if (is_a<figure>(Mp)) {
    point_metric = ex_to<figure>(Mp).get_point_metric();
    cycle_metric = ex_to<figure>(Mp).get_cycle_metric();
    exhashmap<cycle_node> nnodes = ex_to<figure>(Mp).get_nodes();
    for (const auto& x: nnodes) {
        nodes[x.first]=x.second;
        ⟨identify infinity and real line 62d⟩
        }
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_cycle_metric 24e, get_point_metric 11b 24e, nodes 38e, and point_metric 38d.

We need to set *real_line* and *infinity* accordingly.

62d ⟨identify infinity and real line 62d⟩≡ (62c 65b)

```
if (x.second.get_generation() == REAL_LINE_GEN) {
    real_line = x.first;
    R_missing=false;
}
else if (x.second.get_generation() == INFINITY_GEN) {
    infinity = x.first;
    inf_missing=false;
}
```

Uses infinity 38c, INFINITY_GEN 30d 30d, real_line 38c, and REAL_LINE_GEN 30d 30d.

For an unknown type parameter we throw an exception.

63a ⟨figure class 61a⟩+≡ (40b) ◁62c 64a▷
```
} else
    throw(std::invalid_argument("figure::figure(const ex &, const ex &):"
                                " the first parameter shall be a figure, a lst, "
                                " a metric (can be either tensor, matrix,"
                                " Clifford unit or indexed by two indices) "));
⟨set cycle metric in figure 63b⟩
```

Uses ex 40c and figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

If a metric is not supplied or is zero then we clone the point space metric by the rule defined in equation (13).

63b ⟨set cycle metric in figure 63b⟩≡ (63a 83a) 63c▷
```
if (Mc.is_zero()) {
    ex D=get_dim();
    if (is_a<numeric>(D)) {
        lst l0;
        for(int i=0; i< ex_to<numeric>(D).to_int(); ++i)
            l0.append(-jump_fnct(-ex_to<clifford>(point_metric).get_metric(idx(i,D),idx(i,D))));
        cycle_metric = clifford_unit(varidx(real_line, D), indexed(diag_matrix(l0), sy_symm(),
                                                    varidx(symbol("ic"), D), varidx(symbol("jc"), D)));
```

Uses cycle_metric 38d, ex 40c, get_dim() 24f, numeric 12f, point_metric 38d, and real_line 38c.

If dimensionality is not integer, then the point metric is copied.

63c ⟨set cycle metric in figure 63b⟩+≡ (63a 83a) ◁63b 63d▷
```
    } else
        cycle_metric = clifford_unit(varidx(real_line, D), indexed(point_metric.op(0), sy_symm(),
                                                    varidx(symbol("ic"), D), varidx(symbol("jc"), D)));
```

Uses cycle_metric 38d, op 37f, point_metric 38d, and real_line 38c.

If the metric is supplied, we repeat the same procedure to set-up the metric of the cycle space as was done for point space.

63d ⟨set cycle metric in figure 63b⟩+≡ (63a 83a) ◁63c 63e▷
```
} else if (is_a<clifford>(Mc)) {
    cycle_metric = clifford_unit(varidx(real_line,
                                        ex_to<idx>(ex_to<clifford>(Mc).get_metric().op(1)).get_dim()),
                                 ex_to<clifford>(Mc).get_metric());
} else if (is_a<matrix>(Mc)) {
    if (ex_to<matrix>(Mp).rows() ≠ ex_to<matrix>(Mp).cols())
        throw(std::invalid_argument("figure::figure(const ex &, const ex &):"
                                    " only square matrices are admitted as cycle metric"));

  cycle_metric = clifford_unit(varidx(real_line, get_dim()), indexed(Mc, sy_symm(), varidx(symbol("ic"),
                                                                get_dim()), varidx(symbol("jc"), get_dim())));
```

Uses cycle_metric 38d, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_dim() 24f, op 37f, and real_line 38c.

63e ⟨set cycle metric in figure 63b⟩+≡ (63a 83a) ◁63d
```
} else if (is_a<indexed>(Mc)) {
    cycle_metric = clifford_unit(varidx(real_line, ex_to<idx>(Mc.op(1)).get_dim()), Mc);
} else if (is_a<lst>(Mc)) {
  cycle_metric=clifford_unit(varidx(real_line, Mc.nops()), indexed(diag_matrix(ex_to<lst>(Mc)), sy_symm(),
                    varidx(symbol("ic"), Mc.nops()), varidx(symbol("jc"), Mc.nops())));
}
```

Uses cycle_metric 38d, get_dim() 24f, nops 37f, op 37f, and real_line 38c.

The error message

64a ⟨figure class 61a⟩+≡ (40b) ◁63a 64b▷
```
else
  throw(std::invalid_argument("figure::figure(const ex &, const ex &):"
                              " the second parameter"
                              " shall be omitted, equal to zero "
                              " or be a lst, a metric (can be either tensor, matrix,"
                              " Clifford unit or indexed by two indices)"));
```

Uses ex 40c and figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

Finally we check that point and cycle metrics have the same dimensionality.

64b ⟨figure class 61a⟩+≡ (40b) ◁64a 64c▷
```
if (¬ (get_dim()-ex_to<idx>(cycle_metric.op(1)).get_dim()).is_zero())
  throw(std::invalid_argument("figure::figure(const ex &, const ex &):"
                              "the point and cycle metrics shall have "
                              "the same dimensions"));
```

Uses cycle_metric 38d, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_dim() 24f, and op 37f.

We also check that *point_metric* and *cycle_metric* has the same dimensionality.

64c ⟨figure class 61a⟩+≡ (40b) ◁64b 64f▷
```
⟨check dimensionalities point and cycle metrics 64d⟩
⟨add symbols to match dimensionality 64e⟩
```

64d ⟨check dimensionalities point and cycle metrics 64d⟩≡ (64c 83a)
```
if (¬(get_dim()-ex_to<varidx>(cycle_metric.op(1)).get_dim()).is_zero())
  throw(std::invalid_argument("Metrics for point and cycle spaces have"
                              " different dimensionalities!"));
```

Uses cycle_metric 38d, get_dim() 24f, and op 37f.

We produce enough symbols to match dimensionality.

64e ⟨add symbols to match dimensionality 64e⟩≡ (64 65)
```
int D;
if (is_a<numeric>(get_dim())) {
  D=ex_to<numeric>(get_dim()).to_int();
  char name[6];
  for(int i=0; i<D; ++i) {
    sprintf(name, "l%d", i);
    l.append(realsymbol(name));
  }
}
```

Uses get_dim() 24f, l 38g, name 22a, numeric 12f, and realsymbol 17b.

Finally, we set-up two elements which present at any figure: the real line and infinity.

64f ⟨figure class 61a⟩+≡ (40b) ◁64c 65a▷
```
  ⟨setup real line and infinity 64g⟩
}
```

Finally, we supply nodes for the real line and the cycle at infinity.

64g ⟨setup real line and infinity 64g⟩≡ (64f 65b)
```
if (inf_missing) {
  ⟨set the infinity 61c⟩
}
if (R_missing) {
  ⟨initialise the dimension and vector 61b⟩
  ⟨set the real line 61d⟩
}
```

65a ⟨figure class 61a⟩+≡ (40b) ◁64f 65b▷
```
figure::figure(const ex & Mp, const ex & Mc, const exhashmap<cycle_node> & N):
        inherited(), k(realsymbol("k")), m(realsymbol("m")), l()
{
    infinity=symbol("infty","\\infty");
    real_line=symbol("R","\\mathbf{R}");
    bool inf_missing=true, R_missing=true;
    if (is_a<clifford>(Mp) ∧ is_a<clifford>(Mc)) {
        point_metric = Mp;
        cycle_metric = Mc;
    } else
     throw(std::invalid_argument("figure::figure(const ex &, const ex &, exhashmap<cycle_node>):"
                        " the point_metric and cycle_metric should be clifford_unit. "));
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, infinity 38c, k 38g, l 38g, m 38g, point_metric 38d, real_line 38c, and realsymbol 17b.

We coming nodes of cycle to the new figure.

65b ⟨figure class 61a⟩+≡ (40b) ◁65a 65c▷
```
    for (const auto& x: N) {
        nodes[x.first]=x.second;
        ⟨identify infinity and real line 62d⟩
    }
    ⟨add symbols to match dimensionality 64e⟩
    ⟨setup real line and infinity 64g⟩
}
```

Uses nodes 38e.

This constructor reads a figure from a file given by name.

65c ⟨figure class 61a⟩+≡ (40b) ◁65b 66b▷
```
figure::figure(const char* file_name, string fig_name) : inherited(), k(realsymbol("k")), m(realsymbol("m")), l()
{
    infinity=symbol("infty","\\infty");
    real_line=symbol("R","\\mathbf{R}");
    ⟨add gar extension 66a⟩
    GiNaC::archive A;
    std::ifstream ifs(fn.c_str(),  std::ifstream::in);
    ifs ≫ A;

    ⟨add symbols to match dimensionality 64e⟩
    *this=ex_to<figure>(A.unarchive_ex(lst(infinity, real_line), fig_name));

    if (FIGURE_DEBUG) {
        fn="raw-read-"+fn;
        ofstream out1(fn.c_str());
        A.printraw(out1);
        out1.close();
        out1.flush();
    }
}
```

Uses archive 37f, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, FIGURE_DEBUG 39d, infinity 38c, k 38g, l 38g, m 38g, real_line 38c, and realsymbol 17b.

`.gar` is the standard extension for GiNaC archive files.

66a ⟨add gar extension 66a⟩≡ (65c 66b)
```
string fn=file_name;
size_t found = fn.find(".gar");
if (found ≡ std::string::npos)
    fn=fn+".gar";

cout ≪ "use filename: " ≪ fn ≪ endl;
```

This method saves the figure to a file, which can be read by the above constructor.

66b ⟨figure class 61a⟩+≡ (40b) ◁65c 66c▷
```
void figure::save(const char* file_name, const char * fig_name) const
{
    ⟨add gar extension 66a⟩
    GiNaC::archive A;
    A.archive_ex(*this, fig_name);
    ofstream out(fn.c_str());
    out ≪ A;
    out.flush();
    out.close();
    if (FIGURE_DEBUG) {
        fn="raw-save-"+fn;
        ofstream out1(fn.c_str());
        A.printraw(out1);
        out1.close();
        out1.flush();
    }
}
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses archive 37f, FIGURE_DEBUG 39d, and save 26e 26e.

F.5.2. *Addition of new cycles.* This method is merely a wrapper for the second form.

66c ⟨figure class 61a⟩+≡ (40b) ◁66b 66d▷
```
ex figure::add_point(const ex & x, string name, string TeXname)
{
    ⟨auto TeX name 70d⟩
    symbol key(name, TeXname_new);
    return add_point(x, key);
}
```

Uses add_point 9e 13b 22a, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, key 22a, name 22a, and TeXname 22a.

We start from check of parameters.

66d ⟨figure class 61a⟩+≡ (40b) ◁66c 67c▷
```
ex figure::add_point(const ex & x, const ex & key)
{
    if (not (is_a<lst>(x) and (x.nops() ≡ get_dim())))
        throw(std::invalid_argument("figure::add_point(const ex &, const ex &): "
                                    "coordinates of a point shall be a lst of the right lenght"));

    if (not is_a<symbol>(key))
        throw(std::invalid_argument("figure::add_point(const ex &, const ex &): the third"
                                    " argument need to be a point"));
    ⟨adding point with its parents 67a⟩
```

Uses add_point 9e 13b 22a, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_dim() 24f, key 22a, and nops 37f.

This part of the code is shared with *move_point*(). We create two ghost parents for a point, since the parameters of the cycle representing depend from the metric, thus it shall not be hard-coded into the node.

67a ⟨adding point with its parents 67a⟩≡ (66d 72a) 67b▷

```
int dim=x.nops();
lst l0, rels;
rels.append(cycle_relation(key,cycle_orthogonal,false));
rels.append(cycle_relation(infinity,cycle_different));

for(int i=0; i < dim; ++i)
    l0.append(numeric(0));

for(int i=0; i < dim; ++i) {
    l0[i]=numeric(1);
    char name[8];
    sprintf(name, "-(%d)", i);
    symbol mother(ex_to<symbol>(key).get_name()+name);
    nodes[mother]=cycle_node(cycle_data(numeric(0),indexed(matrix(1, dim, l0),
                                                    varidx(mother, get_dim())),numeric(2)*x.op(i)),
                             GHOST_GEN, lst(), lst(key));
    l0[i]=numeric(0);
    rels.append(cycle_relation(mother,cycle_orthogonal));
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_different 23g 96b, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, get_dim() 24f, GHOST_GEN 30d 30d, infinity 38c, key 22a, name 22a, nodes 38e, nops 37f, numeric 12f, and op 37f.

We add relations to parents which define this point. All relations are given in *cycle_metric*, only self-orthogonality is given in terms of *point_metric*. This is done in sake of the parabolic point space.

67b ⟨adding point with its parents 67a⟩+≡ (66d 72a) ◁67a

```
nodes[key]=cycle_node(cycle_data(), 0, rels);
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, key 22a, and nodes 38e.

Now, cycle date shall be generated.

67c ⟨figure class 61a⟩+≡ (40b) ◁66d 67d▷

```
if (¬ info(status_flags::expanded))
    nodes[key].set_cycles(ex_to<lst>(update_cycle_node(key)));
if (FIGURE_DEBUG)
    cerr ≪ "Add the point: " ≪ x ≪ " as the cycle: " ≪ nodes[key] ≪ endl;
return key;
}
```

Uses FIGURE_DEBUG 39d, info 37f, key 22a, nodes 38e, and update_cycle_node 37a.

Add a cycle at zero level with a prescribed data.

67d ⟨figure class 61a⟩+≡ (40b) ◁67c 68a▷

```
ex figure::add_cycle(const ex & C, const ex & key)
{
    ex lC=ex_to<cycle>(C).get_l();
    if (is_a<indexed>(lC))
        nodes[key]=cycle_node(C.subs(lC.op(1)≡key));
    else
        nodes[key]=cycle_node(C);
    if (FIGURE_DEBUG)
        cerr ≪ "Add the cycle: " ≪ nodes[key] ≪ endl;
    return key;
}
```

Uses add_cycle 13c 22b, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, FIGURE_DEBUG 39d, key 22a, nodes 38e, op 37f, and subs 37f.

Add a cycle at zero level with a prescribed data.

68a ⟨figure class 61a⟩+≡ (40b) ◁67d 68b▷
```
ex figure::add_cycle(const ex & C, string name, string TeXname)
{
    ⟨auto TeX name 70d⟩
    symbol key(name, TeXname_new);
    return add_cycle(C, key);
 }
```
Uses add_cycle 13c 22b, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, key 22a, name 22a, and TeXname 22a.

68b ⟨figure class 61a⟩+≡ (40b) ◁68a 68c▷
```
void figure::set_cycle(const ex & key, const ex & C)
{
    if (nodes.find(key) ≡ nodes.end())
        throw(std::invalid_argument("figure::set_cycle(): there is no node wi\
th the key given"));

    if (nodes[key].get_parents().nops() > 0)
        throw(std::invalid_argument("figure::set_cycle(): cannot modify data \
of a cycle with parents"));

    nodes[key].set_cycles(C);

    if (FIGURE_DEBUG)
        cerr ≪ "Replace the cycle: " ≪ nodes[key] ≪ endl;
}
```
Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c, FIGURE_DEBUG 39d, key 22a, nodes 38e, nops 37f, and set_cycle 37a.

68c ⟨figure class 61a⟩+≡ (40b) ◁68b 68d▷
```
void figure::move_cycle(const ex & key, const ex & C)
{
    if (nodes.find(key) ≡ nodes.end())
        throw(std::invalid_argument("figure::set_cycle(): there is no node with the key given"));

    if (nodes[key].get_generation() ≠ 0)
        throw(std::invalid_argument("figure::set_cycle(): cannot modify data of a cycle in"
                                    " non-zero generation"));
```
Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
move_cycle, used in chunk 16d.
Uses ex 40c, key 22a, nodes 38e, and set_cycle 37a.

If we have at zero generation with parents, then they are ghost parents of the point, so shall be deleted. We cannot do this by *remove_cycle_node* since we do not want to remove all its grand childrens.

68d ⟨figure class 61a⟩+≡ (40b) ◁68c 69a▷
```
    if (nodes[key].get_parents().nops() > 0) {
        lst par=nodes[key].get_parent_keys();
        for(const auto& it : par)
            if (nodes[it].get_generation() ≡ GHOST_GEN)
                nodes.erase(it);
            else
                nodes[it].remove_child(key);
    }
    nodes[key].parents=lst();
```
Uses GHOST_GEN 30d 30d, key 22a, nodes 38e, and nops 37f.

Now, the cycle may be set.

69a ⟨figure class 61a⟩+≡ (40b) ◁68d 69b▷
```
    nodes[key].set_cycles(C);
    update_node_lst(nodes[key].get_children());

    if (FIGURE_DEBUG)
      cerr ≪ "Replace the cycle: " ≪ nodes[key] ≪ endl;
  }
```

Uses FIGURE_DEBUG 39d, key 22a, nodes 38e, and update_node_lst 38a.

A cycle can be added by a single **cycle_relation** or a **lst** of **cycle_relation**.

69b ⟨figure class 61a⟩+≡ (40b) ◁69a 69c▷
```
  ex figure::add_cycle_rel(const ex & rel, const ex & key) {
    if (is_a<cycle_relation>(rel))
      return add_cycle_rel(lst(rel), key);
    else
      throw(std::invalid_argument("figure::add_cycle_rel: a cycle shall be added "
                                  "by a single expression, which is a cycle_relation"));
  }
```

Uses add_cycle_rel 9f 13e 22c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and key 22a.

And now we treat the list of relations.

69c ⟨figure class 61a⟩+≡ (40b) ◁69b 69d▷
```
  ex figure::add_cycle_rel(const lst & rel, const ex & key)
  {
    lst cond;
    int gen=0;

    for(const auto& it : rel) {
      if (ex_to<cycle_relation>(it).get_parkey() ≠ key)
        gen=max(gen, nodes[ex_to<cycle_relation>(it).get_parkey()].get_generation());
      nodes[ex_to<cycle_relation>(it).get_parkey()].add_child(key);
    }

    nodes[key]=cycle_node(cycle_data(),gen+1,rel);
```

Uses add_cycle_rel 9f 13e 22c, cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, key 22a, and nodes 38e.

69d ⟨figure class 61a⟩+≡ (40b) ◁69c 69e▷
```
    if (¬ info(status_flags::expanded))
      nodes[key].set_cycles(ex_to<lst>(update_cycle_node(key)));

    if (FIGURE_DEBUG)
      cerr ≪ "Add the cycle : " ≪ nodes[key] ≪ endl;

    return key;
  }
```

Uses FIGURE_DEBUG 39d, info 37f, key 22a, nodes 38e, and update_cycle_node 37a.

This version automatically supply TEX label like c_{23} to symbols with names *c23*.

69e ⟨figure class 61a⟩+≡ (40b) ◁69d 70a▷
```
  ex figure::add_cycle_rel(const lst & rel, string name, string TeXname)
  {
    ⟨auto TeX name 70d⟩
    return add_cycle_rel(rel, symbol(name, TeXname_new));
  }
```

Uses add_cycle_rel 9f 13e 22c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, name 22a, and TeXname 22a.

A similar method to add a cycle by a single relation.

70a ⟨figure class 61a⟩+≡ (40b) ◁69e 70b▷
```
ex figure::add_cycle_rel(const ex & rel, string name, string TeXname)
{
    if (is_a<cycle_relation>(rel)) {
        ⟨auto TeX name 70d⟩
        return add_cycle_rel(lst(rel), symbol(name, TeXname_new));
    } else
        throw(std::invalid_argument("figure::add_cycle_rel: a cycle shall be added "
                                    "by a single expression, which is a cycle_relation"));
}
```

Uses add_cycle_rel 9f 13e 22c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, name 22a, and TeXname 22a.

70b ⟨figure class 61a⟩+≡ (40b) ◁70a 70c▷
```
ex figure::add_subfigure(const ex & F, const lst & L, const ex & key)
{
    GINAC_ASSERT(is_a<figure>(F));
    int gen=0;

    for(const auto& it : L) {
        if (¬ it.is_equal(key))
            gen=max(gen, nodes[it].get_generation());
        nodes[it].add_child(key);
    }
    nodes[key]=cycle_node(cycle_data(),gen+1,lst(subfigure(F,L)));
    if (¬ info(status_flags::expanded))
        nodes[key].set_cycles(ex_to<lst>(update_cycle_node(key)));

    return key;
}
```

Uses add_subfigure 14e 22d, cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, info 37f, key 22a, nodes 38e, subfigure 29c 36a 36c 53a 53b 53c 53d 53e, and update_cycle_node 37a.

This is again a wrapper for the previous method with the newly defined symbol.

70c ⟨figure class 61a⟩+≡ (40b) ◁70b 71a▷
```
ex figure::add_subfigure(const ex & F, const lst & l, string name, string TeXname)
{
    ⟨auto TeX name 70d⟩
    return add_subfigure(F, l, symbol(name, TeXname_new));
}
```

Uses add_subfigure 14e 22d, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, l 38g, name 22a, and TeXname 22a.

70d ⟨auto TeX name 70d⟩≡ (66c 68–70 94a)
```
string TeXname_new;
std::regex e ("([[:alpha:]]+)([[:digit:]]+)");
std::regex e1 ("([[:alnum:]]+)_([[:alnum:]]+)");
if (TeXname ≡ "") {
    if (std::regex_match(name, e))
        TeXname_new=std::regex_replace (name,e,"$1_{$2}");
    else if (std::regex_match(name, e1))
        TeXname_new=std::regex_replace (name,e1,"$1_{$2}");
} else
    TeXname_new= TeXname;
```

Uses name 22a and TeXname 22a.

F.5.3. *Moving and removing cycles.* The method to change a zero-generation cycle to a point with given coordinates.

71a ⟨figure class 61a⟩+≡ (40b) ◁70c 71b▷

```
void figure::move_point(const ex & key, const ex & x)
{
    if (not (is_a<lst>(x) and (x.nops() ≡ get_dim())))
        throw(std::invalid_argument("figure::move_point(const ex &, const ex &): "
                                    "coordinates of a point shall be a lst of the right lenght"));

    if (nodes.find(key) ≡ nodes.end())
        throw(std::invalid_argument("figure::move_point(): there is no node with the key given"));

    if (nodes[key].get_generation() ≠ 0)
        throw(std::invalid_argument("figure::move_point(): cannot modify data of a cycle in"
                                    " non-zero generation"));

    if (FIGURE_DEBUG)
        cerr ≪ "A cycle is moved : " ≪ nodes[key] ≪ endl;
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c, FIGURE_DEBUG 39d, get_dim() 24f, key 22a, move_point 16a 22e, nodes 38e, and nops 37f.

If number of parents was "dimension plus 2", so it was a proper point, we simply need to replace the ghost parents.

71b ⟨figure class 61a⟩+≡ (40b) ◁71a 71c▷

```
    lst par=nodes[key].get_parent_keys();
    unsigned int dim=x.nops();
    lst l0;
    for(unsigned int i=0; i<dim; ++i)
        l0.append(numeric(0));
```

Uses key 22a, nodes 38e, nops 37f, and numeric 12f.

We scan the name of parents to get number of components and substitute their new values.

71c ⟨figure class 61a⟩+≡ (40b) ◁71b 72a▷

```
    char label[40];
    sprintf(label, "%s-(%d)",ex_to<symbol>(key).get_name().c_str());
    if (par.nops() ≡ dim+2 ) {
        for(const auto& it : par) {
            unsigned int i=dim;
            int res=sscanf(ex_to<symbol>(it).get_name().c_str(), label, &i);
            if (res>0 and i<dim) {
                l0[i]=numeric(1);
                nodes[it].set_cycles(cycle_data(numeric(0),indexed(matrix(1, dim, l0),
                                                                   varidx(it, dim)), numeric(2)*x.op(i)));
                l0[i]=numeric(0);
            }
        }
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, key 22a, nodes 38e, nops 37f, numeric 12f, and op 37f.

If the number of parents is zero, so it was a pre-defined cycle and we need create ghost parents for it.

72a ⟨figure class 61a⟩+≡ (40b) ◁71c 72b▷
```
} else if (par.nops() ≡ 0) {
    lst chil=nodes[key].get_children();
    ⟨adding point with its parents 67a⟩
    nodes[key].children=chil;
} else
 throw(std::invalid_argument("figure::move_point(): strange number (neither 0 nor dim+2) of "
                             "parents, which zero-generation node shall have!"));

if (info(status_flags::expanded))
    return;

nodes[key].set_cycles(ex_to<lst>(update_cycle_node(key)));
update_node_lst(nodes[key].get_children());
```

Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, info 37f, key 22a, move_point 16a 22e, nodes 38e, nops 37f, update_cycle_node 37a, and update_node_lst 38a.

update all its children and grandchildren in all generations excluding this node itself

72b ⟨figure class 61a⟩+≡ (40b) ◁72a 72c▷
```
    update_node_lst(nodes[key].get_children());
    if (FIGURE_DEBUG)
        cerr ≪ "Moved to: " ≪ x ≪ endl;
}
```

Uses FIGURE_DEBUG 39d, key 22a, nodes 38e, and update_node_lst 38a.

remove all children (includes grand children, grand grand children...) of the **cycle_node**

72c ⟨figure class 61a⟩+≡ (40b) ◁72b 72d▷
```
void figure::remove_cycle_node(const ex & key)
{
    lst branches=nodes[key].get_children();
    for (const auto& it : branches)
        remove_cycle_node(it);
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c, key 22a, nodes 38e, and remove_cycle_node 22g.

remove the **cycle_node** c from all its parents children lists

72d ⟨figure class 61a⟩+≡ (40b) ◁72c 72e▷
```
    lst par = nodes[key].get_parent_keys();
    for (const auto& it : par) {
```

Uses key 22a and nodes 38e.

Parents of a point at gen-0 can be simply deleted as no other cycle need them and they are not of interest. For other parents we modify their *cildren* list.

72e ⟨figure class 61a⟩+≡ (40b) ◁72d 73a▷
```
        if (nodes[it].get_generation() ≡ GHOST_GEN)
            nodes.erase(it);
        else
            nodes[it].remove_child(key);
    }
```

Uses GHOST_GEN 30d 30d, key 22a, and nodes 38e.

73a ⟨figure class 61a⟩+≡ (40b) ◁72e 73b▷
```
    //remove the cycle_node c from the figure
    nodes.erase(key);
    if (FIGURE_DEBUG)
      cerr << "A cycle is removed :" << key << endl ;
  }
```
Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, FIGURE_DEBUG 39d, key 22a, and nodes 38e.

F.5.4. *Evaluattion of cycles and figure updates.* This procedure can solve a system of linear conditions or a system with one quadratic equation. It was already observed in [9; 19, § 5.5], see Sec. 3.1, that n tangency-type conditions (each of them is quadratic) can be reduced to the single quadratic condition $\langle C, C\rangle = 1$ and n linear conditions like $\langle C, C^i\rangle = \lambda_i$.

73b ⟨figure class 61a⟩+≡ (40b) ◁73a 73c▷
```
  ex figure::evaluate_cycle(const ex & symbolic, const lst & cond) const
  {
    //cerr << "symbolic: "; symbolic.dbgprint();
    //cerr << "condit: "; cond.dbgprint();
    bool first_solution=true, second_solution=false;
```
Uses ex 40c and figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

This method can be applied to cycles with numerical dimensions.

73c ⟨figure class 61a⟩+≡ (40b) ◁73b 73d▷
```
    int D;
    if (is_a<numeric>(get_dim()))
      D=ex_to<numeric>(get_dim()).to_int();
    else
      throw logic_error("Could not resolve cycle relations if dimensionality is not numeric!");
```
Uses get_dim() 24f and numeric 12f.

The code is stolen from cycle.nw

73d ⟨figure class 61a⟩+≡ (40b) ◁73c 73e▷
```
    lst symbols, lin_cond, nonlin_cond;
    if (is_a<symbol>(ex_to<cycle_data>(symbolic).get_m()))
      symbols.append(ex_to<cycle_data>(symbolic).get_m());
    for (int i = 0; i < D; i++)
      if (is_a<symbol>(ex_to<cycle_data>(symbolic).get_l(i)))
        symbols.append(ex_to<cycle_data>(symbolic).get_l(i));
    if (is_a<symbol>(ex_to<cycle_data>(symbolic).get_k()))
      symbols.append(ex_to<cycle_data>(symbolic).get_k());
```
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e.

If no symbols are found we assume that the cycle is uniquely defined

73e ⟨figure class 61a⟩+≡ (40b) ◁73d 74a▷
```
    if (symbols.nops() == 0)
     throw(std::invalid_argument("figure::evaluate_cycle(): could not construct the default list of "
                                 "parameters"));
    //cerr << "symbols: "; symbols.dbgprint();
```
Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d and nops 37f.

The code is stolen from `ginac/inifcns.cpp`, build matrix representation from equation system

74a ⟨figure class 61a⟩+≡ (40b) ◁73e 74b▷

```
lst rhs;
for (size_t r=0; r<cond.nops(); r++) {
    lst sys;
    ex eq = (cond.op(r).op(0)-cond.op(r).op(1)).expand(); // lhs-rhs==0
    if (float_evaluation)
        eq=eq.evalf();
    //cerr << "eq: "; eq.dbgprint();
    ex linpart = eq;
    for (size_t c=0; c<symbols.nops(); c++) {
        const ex co = eq.coeff(ex_to<symbol>(symbols.op(c)),1);
        linpart -= co*symbols.op(c);
        sys.append(co);
    }
    linpart = linpart.expand();
    //cerr << "sys: "; sys.dbgprint();
    //cerr << "linpart: "; linpart.dbgprint();
```

Uses `evalf` 37f, `ex` 40c, `float_evaluation` 38f, `nops` 37f, and `op` 37f.

test if system is linear and fill vars matrix

74b ⟨figure class 61a⟩+≡ (40b) ◁74a 74c▷

```
    bool is_linear=true;
    for (size_t i=0; i<symbols.nops(); i++)
        if (sys.has(symbols.op(i)) ∨ linpart.has(symbols.op(i)))
            is_linear = false;
    //cerr << "this equation linear? " << is_linear << endl;
```

Uses `nops` 37f and `op` 37f.

To avoid an expensive expansion we use the previous calculations to re-build the equation.

74c ⟨figure class 61a⟩+≡ (40b) ◁74b 74d▷

```
    if (is_linear) {
        lin_cond.append(sys);
        rhs.append(linpart);
    } else
        nonlin_cond.append(cond.op(r));
}
//cerr << "lin_cond: "; lin_cond.dbgprint();
//cerr << "nonlin_cond: "; nonlin_cond.dbgprint();
```

Uses `op` 37f.

Solving the linear part, the code is again stolen from `ginac/inifcns.cpp`

74d ⟨figure class 61a⟩+≡ (40b) ◁74c 75a▷

```
lst subs_lst1, free_vars;
if (lin_cond.nops()>0) {
    matrix solution;
    try {
        solution=ex_to<matrix>(lst_to_matrix(lin_cond)).solve(matrix(symbols.nops(),1,symbols),
                                                              matrix(rhs.nops(),1,rhs));
```

Uses `nops` 37f.

If the system is incompatible no cycle data is returned (probably singular matrix or otherwise overdetermined system, it is consistent to return an empty list)

75a ⟨figure class 61a⟩+≡ (40b) ◁74d 75b▷

```
} catch (const std::runtime_error & e) {
    return lst();
}
GINAC_ASSERT(solution.cols()≡1);
GINAC_ASSERT(solution.rows()≡symbols.nops());
```

Uses nops 37f.

Now we sort out the result: free variables will be used for non-linear equation, resolved variables—for substitution.

75b ⟨figure class 61a⟩+≡ (40b) ◁75a 75c▷

```
for (size_t i=0; i<symbols.nops(); i++)
    if (symbols.op(i)≡solution(i,0))
        free_vars.append(symbols.op(i));
    else
        subs_lst1.append(symbols.op(i)≡solution(i,0));
}
```

Uses nops 37f and op 37f.

It is easy to solve a linear system the immediate substitution of the result.

75c ⟨figure class 61a⟩+≡ (40b) ◁75b 75d▷

```
cycle_data C_new, C1_new;
if (nonlin_cond.nops() ≡ 0) {
    C_new = ex_to<cycle_data>(symbolic.subs(subs_lst1)).normalize();
    //cerr << "C_new: "; C_new.dbgprint();
}
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, nops 37f, and subs 37f.

If some non-linear equations present, we sort out free and non-free variables.

75d ⟨figure class 61a⟩+≡ (40b) ◁75c 75e▷

```
else {
    lst subs_lst2, // The second solution lists for quadratic equations
        nonlin_cond_new;
    subs_lst2=subs_lst1;
    //cerr << "free_vars: "; free_vars.dbgprint();
    //cerr << "subs_lst1: "; subs_lst1.dbgprint();
```

Only one non-linear (quadratic) equation can be treated by this method, so we pick up the first from the list (hopefully other will be satisfied afterwards).

75e ⟨figure class 61a⟩+≡ (40b) ◁75d 76a▷

```
    ex quadratic_eq=nonlin_cond.op(0).subs(subs_lst1, subs_options::algebraic
                                         | subs_options::no_pattern);
    ex quadratic=(quadratic_eq.op(0)-quadratic_eq.op(1)).expand().normal();
    if (float_evaluation)
        quadratic=quadratic.evalf();
    //cerr << "quadratic: "; quadratic.dbgprint();
    bool is_quadratic=false;
    exmap flat_var_em, var1_em, var2_em;
    ex flat_var, var1, var2;
```

Uses evalf 37f, ex 40c, float_evaluation 38f, op 37f, and subs 37f.

We now search for the first free variable which has a square in the equation.

76a ⟨figure class 61a⟩+≡ (40b) ◁75e 76b ▷

```
for (size_t i=0; i < free_vars.nops(); ++i) {
  ex A=quadratic.coeff(free_vars.op(i),2).normal();
  //cerr << "A: "; A.dbgprint();
  if (¬ is_less_than_epsilon(A)) {
    is_quadratic=true;
    ex B=quadratic.coeff(free_vars.op(i),1),
       C=quadratic.coeff(free_vars.op(i),0);
    ex D=(pow(B,2)-numeric(4)*A*C).normal();
    //cerr << "D: "; D.dbgprint();
```

Uses ex 40c, is_less_than_epsilon 40d, nops 37f, numeric 12f, and op 37f.

If there exists another free variable then we simply assign the value 1 to it.

76b ⟨figure class 61a⟩+≡ (40b) ◁76a 76c ▷

```
if (free_vars.nops()>1) {
  if (i≡0) {
    flat_var_em.insert(std::make_pair(free_vars.op(1), numeric(1)));
    flat_var=(free_vars.op(1)≡numeric(1));
  } else {
    flat_var_em.insert(std::make_pair(free_vars.op(0), numeric(1)));
    flat_var=(free_vars.op(0)≡numeric(1));
  }
}
D=D.subs(flat_var_em,subs_options::algebraic | subs_options::no_pattern);
//cerr << "D: "; D.dbgprint();
```

Uses nops 37f, numeric 12f, op 37f, and subs 37f.

Small perturbations of the zero determinant can create the unwanted imaginary entries, thus we treat it as exactly zero. Also negligibly small A corresponds to effectively linear equation.

76c ⟨figure class 61a⟩+≡ (40b) ◁76b 77a ▷

```
if (is_less_than_epsilon(D) ∨ ((¬ is_less_than_epsilon(B)) ∧ is_less_than_epsilon(A÷B))) {
  if (is_less_than_epsilon(D)) {
    //cerr << "zero determinant" << endl;
    var1=(-B÷numeric(2)÷A).subs(flat_var_em,subs_options::algebraic
                | subs_options::no_pattern).normal();
  } else {
    //cerr << "almost linear equation" << endl;
    var1=(-C÷B).subs(flat_var_em,subs_options::algebraic
                | subs_options::no_pattern).normal();
  }
  var1_em.insert(std::make_pair(free_vars.op(i), var1));
  subs_lst1=ex_to<lst>(subs_lst1
              .subs(var1_em,subs_options::algebraic | subs_options::no_pattern));
  subs_lst1=ex_to<lst>(subs_lst1.append(free_vars.op(i) ≡ var1)
              .subs(flat_var_em,subs_options::algebraic | subs_options::no_pattern));
  if (free_vars.nops()>1)
    subs_lst1.append(flat_var);
  //cerr << "subs_lst1a: "; subs_lst1.dbgprint();
```

Uses is_less_than_epsilon 40d, nops 37f, numeric 12f, op 37f, and subs 37f.

For a non-zero discriminant we generate two solutions

77a ⟨figure class 61a⟩+≡ (40b) ◁76c 77b ▷

```
} else {
    second_solution=true;
    var1=((-B+sqrt(D))÷numeric(2)÷A).subs(flat_var_em,subs_options::algebraic
                | subs_options::no_pattern).normal();
    var1_em.insert(std::make_pair(free_vars.op(i), var1));
    var2=((-B-sqrt(D))÷numeric(2)÷A).subs(flat_var_em,subs_options::algebraic
                | subs_options::no_pattern).normal();
    var2_em.insert(std::make_pair(free_vars.op(i), var2));
    subs_lst1=ex_to<lst>(subs_lst1
                .subs(var1_em,subs_options::algebraic | subs_options::no_pattern));
    subs_lst1=ex_to<lst>(subs_lst1.append(free_vars.op(i) == var1)
                .subs(flat_var_em,subs_options::algebraic | subs_options::no_pattern));
```

Uses numeric 12f, op 37f, and subs 37f.

We need to add the values of *flat_var* which were assigned the numeric value. Then we modify our substitution list accordingly.

77b ⟨figure class 61a⟩+≡ (40b) ◁77a 77c ▷

```
    if (free_vars.nops()>1)
        subs_lst1.append(flat_var);
    //cerr << "subs_lst1b: "; subs_lst1.dbgprint();
    subs_lst2=ex_to<lst>(subs_lst2
                .subs(var2_em,subs_options::algebraic | subs_options::no_pattern));
    subs_lst2=ex_to<lst>(subs_lst2.append(free_vars.op(i) == var2)
                .subs(flat_var_em,subs_options::algebraic | subs_options::no_pattern));
    if (free_vars.nops()>1)
        subs_lst2.append(flat_var);
    //cerr << "subs_lst2b: "; subs_lst2.dbgprint();
  }
  break;
 }
}
```

Uses nops 37f, op 37f, and subs 37f.

The non-linear equation is not quadratic in any single variable, e.g. is $mn + 1 = 0$.

77c ⟨figure class 61a⟩+≡ (40b) ◁77b 77d ▷

```
if (¬ is_quadratic) {
    //cerr << "The equation is not quadratic in a single variable"<<endl;
    //cerr << "free_vars: "; free_vars.dbgprint();
    if (free_vars.nops()>1) {
  //cerr << "Quadratic substituted "; (quadratic.subs(free_vars.op(0)==numeric(1))==0).dbgprint();
```

Uses nops 37f, numeric 12f, op 37f, and subs 37f.

Then, we can "linearise" by a substitution of a free variable with an explicit numeric value.

77d ⟨figure class 61a⟩+≡ (40b) ◁77c 78a ▷

```
int count=0;
if (quadratic.has(free_vars.op(1))) {
    var1=lsolve(quadratic.subs(free_vars.op(0)≡numeric(1))≡0, free_vars.op(1));
    var1_em.insert(std::make_pair(free_vars.op(1), var1));
    var1_em.insert(std::make_pair(free_vars.op(0), numeric(1)));
    subs_lst1=ex_to<lst>(subs_lst1
                .subs(var1_em,subs_options::algebraic | subs_options::no_pattern));
    subs_lst1.append(free_vars.op(1) ≡ var1).append(free_vars.op(0)≡numeric(1));

    //cerr << "non-quadratic subs_lst1: "; subs_lst1.dbgprint();
    ++count;
}
```

Uses numeric 12f, op 37f, and subs 37f.

The similar solution for the other variable.

78a ⟨figure class 61a⟩+≡ (40b) ◁77d 78b▷

```
if (quadratic.has(free_vars.op(0))) {
    var2=lsolve(quadratic.subs(free_vars.op(1)≡numeric(1))≡0, free_vars.op(0));
    var2_em.insert(std::make_pair(free_vars.op(0), var2));
    var2_em.insert(std::make_pair(free_vars.op(1), numeric(1)));
    subs_lst2=ex_to<lst>(subs_lst2
                .subs(var2_em,subs_options::algebraic | subs_options::no_pattern));
    subs_lst2.append(free_vars.op(0) ≡ var2).append(free_vars.op(1)≡numeric(1));
    //cerr << "non-quadratic subs_lst2: "; subs_lst2.dbgprint();
```

Uses numeric 12f, op 37f, and subs 37f.

If no solution was found for the first variable, then this solution become first.

78b ⟨figure class 61a⟩+≡ (40b) ◁78a 78c▷

```
    if (count≡0)
        subs_lst1=subs_lst2;
    ++count;
}
if (count>1)
    second_solution=true;
```

There is only one "non-linear" variable and the equation becomes linear for it, we make a quick check of this:

78c ⟨figure class 61a⟩+≡ (40b) ◁78b 78d▷

```
} else {
    //cerr << "Quadratic becomes linear: "; quadratic.dbgprint();
    //cerr << "Var: "; free_vars.op(0).dbgprint();
    ex B=quadratic.coeff(free_vars.op(0),1).normal(),
    C=quadratic.coeff(free_vars.op(0),0).normal();
    // paranoya check
    if (¬ is_less_than_epsilon((quadratic-(B*free_vars.op(0)+C)).subs(free_vars.op(0)≡1).normal()))
        return lst();
```

Uses ex 40c, is_less_than_epsilon 40d, op 37f, and subs 37f.

If the equation is linear, then we have the solution:

78d ⟨figure class 61a⟩+≡ (40b) ◁78c 78e▷

```
    var1=(-C÷B).normal();
    var1_em.insert(std::make_pair(free_vars.op(0), var1));
    subs_lst1=ex_to<lst>(subs_lst1
                .subs(var1_em,subs_options::algebraic | subs_options::no_pattern));
    subs_lst1.append(free_vars.op(0) ≡ var1);
    //cerr << "non-quadratic subs_lst1: "; subs_lst1.dbgprint();
}
}
```

Uses op 37f and subs 37f.

Now we check that other non-linear conditions are satisfied by the found solutions.

78e ⟨figure class 61a⟩+≡ (40b) ◁78d 79a▷

```
lst::const_iterator it1= nonlin_cond.begin();
++it1;
//cerr << "Subs list: "; subs_lst1.dbgprint();
lst subs_f1=ex_to<lst>(subs_lst1.evalf()), subs_f2;
//cerr << "Subs list float: "; subs_f1.dbgprint();
if(second_solution)
    subs_f2=ex_to<lst>(subs_lst2.evalf());
```

Uses evalf 37f.

Since CAS is not as perfect as one may wish, we checked obtained solutions in two ways: through float approximations and exact calculations. If either works then the solution is accepted.

79a ⟨figure class 61a⟩+≡ (40b) ◁78e 79b▷

```
for (; it1 ≠ nonlin_cond.end(); ++it1) {
    first_solution &=(is_less_than_epsilon((it1→op(0)-it1→op(1)).subs(subs_f1,
                                                subs_options::algebraic | subs_options::no_pattern))
                    ∨ ((it1→op(0)-it1→op(1)).subs(subs_lst1,
                                subs_options::algebraic | subs_options::no_pattern)).normal().is_zero());
    if(second_solution)
        second_solution &= (is_less_than_epsilon((it1→op(0)-it1→op(1)).subs(subs_f2,
                                                subs_options::algebraic | subs_options::no_pattern))
                    ∨ ((it1→op(0)-it1→op(1)).subs(subs_lst2,
                                subs_options::algebraic | subs_options::no_pattern)).normal().is_zero());
}
```

Uses is_less_than_epsilon 40d, op 37f, and subs 37f.

If a solution is good, then we use it to generate the respective cycle.

79b ⟨figure class 61a⟩+≡ (40b) ◁79a 79c▷

```
if (first_solution)
    C_new=symbolic.subs(subs_lst1, subs_options::algebraic
                                | subs_options::no_pattern);

//cerr << "C_new: "; C_new.dbgprint();
if (second_solution)
    C1_new=symbolic.subs(subs_lst2, subs_options::algebraic
                                | subs_options::no_pattern);
//cerr << "C1_new: "; C1_new.dbgprint();
}
```

Uses subs 37f.

We check if any symbols survived after calculations...

79c ⟨figure class 61a⟩+≡ (40b) ◁79b 79d▷

```
lst repl;
if (ex_to<cycle_data>(C_new).has(ex_to<cycle_data>(symbolic).get_k()))
    repl.append(ex_to<cycle_data>(symbolic).get_k()≡realsymbol());
if (ex_to<cycle_data>(C_new).has(ex_to<cycle_data>(symbolic).get_m()))
    repl.append(ex_to<cycle_data>(symbolic).get_m()≡realsymbol());
if (ex_to<cycle_data>(C_new).has(ex_to<cycle_data>(symbolic).get_l().op(0).op(0)))
    repl.append(ex_to<cycle_data>(symbolic).get_l().op(0).op(0)≡realsymbol());
if (ex_to<cycle_data>(C_new).has(ex_to<cycle_data>(symbolic).get_l().op(0).op(1)))
    repl.append(ex_to<cycle_data>(symbolic).get_l().op(0).op(1)≡realsymbol());
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, op 37f, and realsymbol 17b.

...and if they are, then we replace them for new one

79d ⟨figure class 61a⟩+≡ (40b) ◁79c 80a▷

```
if (repl.nops()>0) {
    if (first_solution)
        C_new=C_new.subs(repl);
    if (second_solution)
        C1_new=C1_new.subs(repl);
}

//cerr << endl;
```

Uses nops 37f and subs 37f.

Finally, every constructed cycle is added to the result.

80a ⟨figure class 61a⟩+≡ (40b) ◁79d 80b▷
```
    lst res;
    if (first_solution)
        res.append(float_evaluation?C_new.num_normalize().evalf():C_new.num_normalize());
    if (second_solution)
        res.append(float_evaluation?C1_new.num_normalize().evalf():C1_new.num_normalize());

    return res;
}
```

Uses evalf 37f and float_evaluation 38f.

This method runs recursively because we do not know in advance the number of conditions glued by and/or. Also, some relations (e.g. *moebius_trans* or **subfigure**) directly define the cycles, and for others we need to solve some equations.

80b ⟨figure class 61a⟩+≡ (40b) ◁80a 80c▷
```
ex figure::update_cycle_node(const ex & key, const lst & eq_cond, const lst & neq_cond, lst res, unsigned int level)
{
    //cerr << endl << "level: " << level << "; cycle: "; nodes[key].dbgprint();
    if (level ≡ 0) {// set the iniail symbolic cycle for calculations
        ⟨update node zero level 81d⟩
    }
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, key 22a, nodes 38e, and update_cycle_node 37a.

If we get here, then some equations need to be solved. We advance through the parents list to match the *level*.

80c ⟨figure class 61a⟩+≡ (40b) ◁80b 80d▷
```
    lst par = nodes[key].get_parents();
    lst::const_iterator it = par.begin();
    for(unsigned int i=0; i<level;++i)
        ++it;

    lst new_cond=ex_to<lst>(ex_to<cycle_relation>(*it).rel_to_parent(nodes[key].get_cycles().op(0),
                                                                    point_metric, cycle_metric, nodes));
```

Uses cycle_metric 38d, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, key 22a, nodes 38e, op 37f, and point_metric 38d.

We need to go through the cycle at least once at every *level*.

80d ⟨figure class 61a⟩+≡ (40b) ◁80c 81a▷
```
    for (const auto& it1 : new_cond) {
        lst store_cond=neq_cond;
        lst use_cond=eq_cond;
        lst step_cond=ex_to<lst>(it1);
        for (const auto& it2 : step_cond)
            if ((is_a<relational>(it2) ∧ ex_to<relational>(it2).info(info_flags::relation_equal)))
                use_cond.append(it2);   // append the equation
            else if (is_a<cycle>(it2))
                res.append(it2); // append a solution
            else
                store_cond.append(*it); // store the pointer to parents producing inequality
        //cerr << "use_cond: "; use_cond.dbgprint();
        //cerr << "store_cond: "; store_cond.dbgprint();
```

Uses info 37f.

When all conditions are unwrapped and there are equations to solve, we call a solver. Solutions from *res* are copied there as well, then *res* is cleared.

81a ⟨figure class 61a⟩+≡ (40b) ◁80d 81b▷

```
if(level ≡ par.nops()-1) { //if the last one in the parents list
    lst cnew;
    if (use_cond.nops()>0)
        cnew=ex_to<lst>(evaluate_cycle(nodes[key].get_cycle_data(0), use_cond));
    for (const auto& sol : res)
        cnew.append(sol);
    res=lst();
```

Uses key 22a, nodes 38e, and nops 37f.

Now we check which of the obtained solutions satisfy to the restrictions in *store_cond*

81b ⟨figure class 61a⟩+≡ (40b) ◁81a 81c▷

```
    //cerr<< "Store cond: "; store_cond.dbgprint();
    //cerr<< "Use cond: "; use_cond.dbgprint();
    for (const auto& inew: cnew) {
        bool to_add=true;
        for (const auto& icon: store_cond) {
            lst suits=ex_to<lst>(ex_to<cycle_relation>(icon).rel_to_parent(ex_to<cycle_data>(inew),
                                                                           point_metric, cycle_metric, nodes));
            //cerr<< "Suit: "; suits.dbgprint();
            for (const auto& is : suits)
                for (const auto& ic : is) {
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, cycle_metric 38d, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, nodes 38e, and point_metric 38d.

Two possibilities to check: either a **false** relational or a number close to zero.

81c ⟨figure class 61a⟩+≡ (40b) ◁81b 82c▷

```
                    if (is_a<relational>(ic)) {
                        if (¬(bool)ex_to<relational>(ic))
                            to_add=false;
                    } else if (is_less_than_epsilon(ic))
                        to_add=false;
                }
                if (¬ to_add)
                    break;
            }
            if (to_add)
                res.append(inew);
        }
    //cerr<< "Result: "; res.dbgprint();
    } else
        res=ex_to<lst>(update_cycle_node(key, use_cond, store_cond, res, level+1));
}
if (level ≡0)
    return unique_cycle(res);
else
    return res;
}
```

Uses is_less_than_epsilon 40d, key 22a, unique_cycle 29e 100b, and update_cycle_node 37a.

If the cycle is defined by by a **subfigure** all calculations are done within it.

81d ⟨update node zero level 81d⟩≡ (80b) 82a▷

```
if ( nodes[key].get_parents().nops() ≡ 1 ∧ is_a<subfigure>(nodes[key].get_parents().op(0))) {
    figure F=ex_to<figure>(ex_to<basic>(ex_to<subfigure>(nodes[key].get_parents().op(0)).get_subf())
                           .clearflag(status_flags::expanded));
    F=float_evaluation? F.set_float_eval(): F.set_exact_eval();
```

Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, float_evaluation 38f, key 22a, nodes 38e, nops 37f, op 37f, set_exact_eval 26c, set_float_eval 26c, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

We replace parameters of the **subfigure** by current parents and evaluate the result.

82a ⟨update node zero level 81d⟩+≡ (80b) ◁81d 82b▷

```
lst parkeys=ex_to<lst>(ex_to<subfigure>(nodes[key].get_parents().op(0)).get_parlist());
unsigned int var=0;
char name[12];
for (const auto& it : parkeys) {
    sprintf(name, "variable%03d", var);
    F.set_cycle(F.get_cycle_label(name), nodes[it].get_cycles());
    ++var;
}
F.set_metric(point_metric,cycle_metric); // this calls automatic figure re-calculation
return F.get_cycle(F.get_cycle_label("result"));
```

Uses cycle_metric 38d, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_cycle 24g 24h, get_cycle_label 23a, key 22a, name 22a, nodes 38e, op 37f, point_metric 38d, set_cycle 37a, set_metric 21b, and subfigure 29c 36a 36c 53a 53b 53c 53d 53e.

For a list of relations we simply set up a symbolic cycle and proceed with calculations in recursion.

82b ⟨update node zero level 81d⟩+≡ (80b) ◁82a

```
} else
  nodes[key].set_cycles(cycle_data(k, indexed(matrix(1, ex_to<numeric>(get_dim()).to_int(), l), varidx(key, ex_to<nur
```

Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, get_dim() 24f, k 38g, key 22a, l 38g, m 38g, nodes 38e, and numeric 12f.

The figure is updated.

82c ⟨figure class 61a⟩+≡ (40b) ◁81c 82d▷

```
figure figure::update_cycles()
{
    if (info(status_flags::expanded))
        return *this;
    lst all_child;
    for (auto& x: nodes)
        if (ex_to<cycle_node>(x.second).get_generation() == 0) {
            if (ex_to<cycle_node>(x.second).get_parents().nops() > 0)
                nodes[x.first].set_cycles(ex_to<lst>(update_cycle_node(x.first)));
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, info 37f, nodes 38e, nops 37f, update_cycle_node 37a, and update_cycles 38b.

We collect all children of the zero-generation cycles for subsequent update.

82d ⟨figure class 61a⟩+≡ (40b) ◁82c 83a▷

```
            lst ch=ex_to<cycle_node>(x.second).get_children();
            for (const auto& it1 : ch)
                all_child.append(it1);
        }
    all_child.sort();
    all_child.unique();
    update_node_lst(all_child);
    return *this;
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c and update_node_lst 38a.

F.5.5. *Additional methods.* Set the new metric for the figure, repeating the previous code from the constructor.

83a ⟨figure class 61a⟩+≡ (40b) ◁82d 83b▷
```
void figure::set_metric(const ex & Mp, const ex & Mc)
{
    ex D=get_dim();
    ⟨set point metric in figure 62a⟩
    ⟨set cycle metric in figure 63b⟩
    ⟨check dimensionalities point and cycle metrics 64d⟩
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c, get_dim() 24f, and set_metric 21b.

We check that the dimensionality of the new metric matches the old one.

83b ⟨figure class 61a⟩+≡ (40b) ◁83a 83c▷
```
    if (¬ (D-get_dim()).is_zero())
        throw(std::invalid_argument("New metric has a different dimensionality!"));
    update_cycles();
}
```

Uses get_dim() 24f and update_cycles 38b.

The method collects all key for nodes with generations in the range [*intgen*,*maxgen*] inclusively.

83c ⟨figure class 61a⟩+≡ (40b) ◁83b 83d▷
```
ex figure::get_all_keys(const int mingen, const int maxgen) const {
    lst keys;
    for (const auto& x: nodes) {
        if (x.second.get_generation() ≥ mingen ∧
            (maxgen ≡ GHOST_GEN ∨ x.second.get_generation() ≤ maxgen))
            keys.append(x.first);
    }
    return keys;
}
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_all_keys 11d 23b, GHOST_GEN 30d 30d, and nodes 38e.

83d ⟨figure class 61a⟩+≡ (40b) ◁83c 83e▷
```
ex figure::get_cycle(const ex & key, const ex & metric) const
{
    exhashmap<cycle_node>::const_iterator cnode=nodes.find(key);
    if (cnode ≡ nodes.end()) {
        if (FIGURE_DEBUG)
            cerr ≪ "There is no key " ≪ key ≪ " in the figure." ≪ endl;
        return lst();
    } else
        return cnode→second.get_cycle(metric);
}
```

Uses cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, FIGURE_DEBUG 39d, get_cycle 24g 24h, key 22a, and nodes 38e.

83e ⟨figure class 61a⟩+≡ (40b) ◁83d 84a▷
```
void figure::reset_figure()
{
    nodes.clear();
    ⟨set the infinity 61c⟩
    ⟨set the real line 61d⟩
}
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses nodes 38e and reset_figure 21d.

Update nodes in the list and all their (grand)children subsequently.

84a ⟨figure class 61a⟩+≡ (40b) ◁83e 84b▷
```
void figure::update_node_lst(const ex & inlist)
{
    if (info(status_flags::expanded))
        return;

    lst intake=ex_to<lst>(inlist);
    while (intake.nops() ≠0) {
        int mingen=nodes[∗intake.begin()].get_generation();
        for (const auto& it : intake)
            mingen=min(mingen, nodes[it].get_generation());
        lst current, future;
        for (const auto& it : intake)
            if (nodes[it].get_generation() ≡ mingen)
                current.append(it);
            else
                future.append(it);
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses ex 40c, info 37f, nodes 38e, nops 37f, and update_node_lst 38a.

All nodes at the current list are updated.

84b ⟨figure class 61a⟩+≡ (40b) ◁84a 84c▷
```
    for (const auto& it : current) {
        nodes[it].set_cycles(ex_to<lst>(update_cycle_node(it)));
        lst nchild=nodes[it].get_children();
        for (const auto& it1 : nchild)
            future.append(it1);
    }
```

Uses nodes 38e and update_cycle_node 37a.

Future list becomes new intake.

84c ⟨figure class 61a⟩+≡ (40b) ◁84b 84d▷
```
            intake=future;
            intake.sort();
            intake.unique();
        }
    }
```

84d ⟨figure class 61a⟩+≡ (40b) ◁84c 85a▷
```
ex figure::get_cycle_label(string name) const
{
    for (const auto& x: nodes)
        if (ex_to<symbol>(x.first).get_name() ≡ name)
            return x.first;

    return 0;
}
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_cycle_label 23a, name 22a, and nodes 38e.

F.5.6. *Drawing methods.* Drawing the figure is possible only in two dimensions, thus we check this at the start.

85a ⟨figure class 61a⟩+≡ (40b) ◁84d 85c▷
```
void figure::asy_draw(ostream & ost, ostream & err, const string picture,
                      const ex & xmin, const ex & xmax, const ex & ymin, const ex & ymax,
                      asy_style style, label_string lstring, bool with_realline,
                      bool with_header, int points_per_arc, const string imaginary_options) const
{
    ⟨check that dimensionality is 2 85b⟩
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses asy_draw 25b 25b and ex 40c.

85b ⟨check that dimensionality is 2 85b⟩≡ (85–87)
```
    if (¬ (get_dim()-2).is_zero())
        throw logic_error("Drawing is possible for two-dimensional figures only!");
```

Uses get_dim() 24f.

85c ⟨figure class 61a⟩+≡ (40b) ◁85a 85d▷
```
    stringstream labels;
    string dots;
    std::regex re("dot\\(");

    for (const auto& x: nodes) {
        lst cycles=ex_to<lst>(x.second.get_cycle(point_metric));
        for (const auto& it1 : cycles)
            try {
                if ( (x.second.get_generation() > REAL_LINE_GEN) ∨
                     ((x.second.get_generation() ≡ REAL_LINE_GEN) ∧ with_realline)) {
                    ost ≪ "// label: " ≪ (x.first) ≪ endl;
```

Uses get_cycle 24g 24h, nodes 38e, point_metric 38d, and REAL_LINE_GEN 30d 30d.

Produce the coulour and style for the cycle.

85d ⟨figure class 61a⟩+≡ (40b) ◁85c 85e▷
```
                lst colours;
                string asy_opt;
                if (x.second.custom_asy≡"") {
                    asy_opt=style(x.first, (it1), colours);
                } else
                    asy_opt=x.second.custom_asy;
```

Save the string of to re-cycle it label placement.

85e ⟨figure class 61a⟩+≡ (40b) ◁85d 86a▷
```
                stringstream sstr;
                cycle2D(ex_to<cycle>(it1)).asy_draw(sstr, picture, xmin, xmax,
                                                    ymin, ymax, colours, asy_opt, with_header, points_per_arc, imaginary_options);
```

Uses asy_draw 25b 25b.

Since in parabolic spaces zero-radius cycles are detached from the their centres, which they denote we wish to have a hint on centres positions.

86a ⟨figure class 61a⟩+≡ (40b) ◁85e 86b▷

```
if (FIGURE_DEBUG ∧ is_less_than_epsilon(ex_to<cycle>(it1).det())
    ∧ ex_to<clifford>(point_metric).get_metric(idx(1,2),idx(1,2)).is_zero()) {
    double x=ex_to<numeric>(ex_to<cycle>(it1).center(cycle_metric).op(0)
                .evalf()).to_double(),
        y=ex_to<numeric>(ex_to<cycle>(it1).center(cycle_metric).op(1)
                .evalf()).to_double();
    if ( xmin ≤ x ∧ x≤xmax ∧ ymin ≤ y ∧ y≤ymax)
        sstr ≪ "dot((" ≪ ex_to<cycle>(it1).center(cycle_metric).op(0).evalf()
            ≪ "," ≪ ex_to<cycle>(it1).center(cycle_metric).op(1).evalf()
            ≪ "), black+3pt);" ≪ endl;
}
```

Uses cycle_metric 38d, evalf 37f, FIGURE_DEBUG 39d, is_less_than_epsilon 40d, numeric 12f, op 37f, and point_metric 38d.

Dots and label will be drawn last to avoid over-painting.

86b ⟨figure class 61a⟩+≡ (40b) ◁86a 86c▷

```
if (std::regex_search(sstr.str(), re))
    dots+=sstr.str();
else
    ost ≪ sstr.str();
```

Find the label position

86c ⟨figure class 61a⟩+≡ (40b) ◁86b 86d▷

```
        labels ≪ lstring(x.first, (it1), sstr.str());
        }
    } catch (exception &p) {
        if (FIGURE_DEBUG)
            err ≪ "Failed to draw " ≪ x.first ≪": " ≪ x.second;
    }
}
//cerr << "Dots: " << dots;
ost ≪ dots
    ≪ labels.str();
}
```

Uses FIGURE_DEBUG 39d.

86d ⟨figure class 61a⟩+≡ (40b) ◁86c 87a▷

```
void figure::asy_write(int size, const ex & xmin, const ex & xmax, const ex & ymin, const ex & ymax,
                       string name, string format,
                       asy_style style, label_string lstring, bool with_realline,
                       bool with_header, int points_per_arc, const string imaginary_options, bool rm_asy_file) const
{
    ⟨check that dimensionality is 2 85b⟩
    string filename=name+".asy";
    ofstream out(filename);
    out ≪ "size(" ≪ size ≪ ");" ≪ endl;
    asy_draw(out, cerr, "", xmin, xmax, ymin, ymax,
             style, lstring, with_realline, with_header, points_per_arc, imaginary_options);
    if (name ≡ "")
        out ≪ "shipout();" ≪ endl;
    else
        out ≪ "shipout(\"" ≪ name ≪ "\");" ≪ endl;
    out.flush();
    out.close();
```

Defines:
asy_write, used in chunks 12d, 16, and 19c.
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses asy_draw 25b 25b, ex 40c, and name 22a.

Preparation of `Asymptote` call.

87a ⟨figure class 61a⟩+≡ (40b) ◁86d 87b▷

```
char command[256];
strcpy(command, "asy -V -f ");
strcat(command, format.c_str());
strcat(command, " ");
strcat(command, name.c_str());
char * pcommand=command;
system(pcommand);
if (rm_asy_file)
    remove(filename.c_str());
}
```

Uses `name` 22a.

This method animates figures with parameters.

87b ⟨figure class 61a⟩+≡ (40b) ◁87a 87c▷

```
void figure::asy_animate(const ex &val,
                         int size, const ex & xmin, const ex & xmax, const ex & ymin, const ex & ymax,
                         string name, string format, asy_style style, label_string lstring, bool with_realline,
                         bool with_header, int points_per_arc, const string imaginary_options,
                         const string values_position, bool rm_asy_file) const
{
    ⟨check that dimensionality is 2 85b⟩
    string filename=name+".asy";
    ofstream out(filename);
```

Defines:
`asy_animate`, never used.
`figure`, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses `ex` 40c and `name` 22a.

Header of the file depends from format.

87c ⟨figure class 61a⟩+≡ (40b) ◁87b 87d▷

```
if (format ≡ "pdf")
    out ≪ "usepackage(\"animate\");" ≪ endl
        ≪ "settings.tex=\"pdflatex\";" ≪ endl;
out ≪ "import animation;" ≪ endl
    ≪ "size(" ≪ size ≪ ");" ≪ endl
    ≪ "animation a;" ≪ endl;
```

For every element of *val* we perform the substitution and draw the corresponding picture.

87d ⟨figure class 61a⟩+≡ (40b) ◁87c 87e▷

```
for (const auto& it : ex_to<lst>(val)) {
    out ≪ "save();" ≪ endl;
    unfreeze().subs(it).asy_draw(out, cerr, "", xmin, xmax, ymin, ymax,
                                 style, lstring, with_realline, with_header, points_per_arc, imaginary_options);
```

Uses `asy_draw` 25b 25b, `save` 26e 26e, `subs` 37f, and `unfreeze` 10a 26b.

We prepare the value string for output.

87e ⟨figure class 61a⟩+≡ (40b) ◁87d 88a▷

```
    std::regex deq ("==");
    stringstream sstr;
    sstr ≪ (ex)it;
    string val_str=std::regex_replace(sstr.str(),deq,"=");
```

Uses `ex` 40c.

We put the value of parameters to the figure in accordance with *values_position*.

88a ⟨figure class 61a⟩+≡ (40b) ◁87e 88b▷

```
if (values_position≡"bl")
    out ≪ "label(\"\\texttt{" ≪ val_str ≪ "}\",(" ≪ xmin ≪ "," ≪ ymin ≪ "), SE);";
else if (values_position≡"br")
    out ≪ "label(\"\\texttt{" ≪ val_str ≪ "}\",(" ≪ xmax ≪ "," ≪ ymin ≪ "), SW);";
else if (values_position≡"tl")
    out ≪ "label(\"\\texttt{" ≪ val_str ≪ "}\",(" ≪ xmin ≪ "," ≪ ymax ≪ "), NE);";
else if (values_position≡"tr")
    out ≪ "label(\"\\texttt{" ≪ val_str ≪ "}\",(" ≪ xmax ≪ "," ≪ ymax ≪ "), NW);";

out ≪ "a.add();" ≪ endl
    ≪ "restore();" ≪ endl;
}
```

For output in PDF, GIF, MNG or MP4 format we supply default commands. User may do a custom command using *format* parameter.

88b ⟨figure class 61a⟩+≡ (40b) ◁88a 88c▷

```
if (format ≡ "pdf")
    out ≪ "label(a.pdf(delay=250,\"controls\",multipage=false));" ≪ endl;
else if ((format ≡ "gif") ∨ (format ≡ "mp4") ∨ (format ≡ "mng"))
    out ≪ "a.movie(loops=10,delay=250);" ≪ endl;
else
    out ≪ format ≪ endl;
out.flush();
out.close();
```

Finally we run `Asymptote` to produce an animation.

88c ⟨figure class 61a⟩+≡ (40b) ◁88b 88d▷

```
char command[256];
strcpy(command, "asy -V ");
if ((format ≡ "pdf") ∨ (format ≡ "gif") ∨ (format ≡ "mp4") ∨ (format ≡ "mng")) {
    strcat(command, " -f ");
    strcat(command, format.c_str());
    strcat(command, " ");
}
strcat(command, name.c_str());
char * pcommand=command;
system(pcommand);
if (rm_asy_file)
    remove(filename.c_str());
}
```

Uses `name` 22a.

F.5.7. *Service utilities.*

88d ⟨figure class 61a⟩+≡ (40b) ◁88c 88e▷

```
return_type_t figure::return_type_tinfo() const
{
    return make_return_type_t<figure>();
}
```

Uses `figure` 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

88e ⟨figure class 61a⟩+≡ (40b) ◁88d 89a▷

```
int figure::compare_same_type(const basic &other) const
{
    GINAC_ASSERT(is_a<figure>(other));
    return inherited::compare_same_type(other);
}
```

Defines:
`figure`, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

To print the figure means to print all its nodes.

89a ⟨figure class 61a⟩+≡ (40b) ◁88e 89b▷

```
void figure::do_print(const print_dflt & con, unsigned level) const {
    for (const auto& x: nodes) {
        if (x.second.get_generation() > GHOST_GEN ∨ FIGURE_DEBUG)
            con.s ≪ x.first ≪": " ≪ x.second ;
    }
}
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses FIGURE_DEBUG 39d, GHOST_GEN 30d 30d, and nodes 38e.

89b ⟨figure class 61a⟩+≡ (40b) ◁89a 89c▷

```
ex figure::op(size_t i) const
{
 GINAC_ASSERT(i<nops());
    switch(i) {
    case 0:
        return real_line;
    case 1:
        return infinity;
    case 2:
        return point_metric;
    case 3:
        return cycle_metric;
    default:
        exhashmap<cycle_node>::const_iterator it=nodes.begin();
        for (size_t n=4; n<i;++n)
            ++it;
        return it→second;
    }
}
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, infinity 38c, nodes 38e, nops 37f, op 37f, point_metric 38d, and real_line 38c.

89c ⟨figure class 61a⟩+≡ (40b) ◁89b 90a▷

```
÷∗ex & figure::let_op(size_t i)
{
    ensure_if_modifiable();
    GINAC_ASSERT(i<nops());
    switch(i) {
    case 0:
        return real_line;
    case 1:
        return infinity;
    case 2:
        return point_metric;
    case 3:
        return cycle_metric;
    default:
        exhashmap<cycle_node>::iterator it=nodes.begin();
        for (size_t n=4; n<i;++n)
            ++it;
        return nodes[it→first];
    }
}∗÷
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, infinity 38c, nodes 38e, nops 37f, point_metric 38d, and real_line 38c.

We need to make substitution in the form of *exmap*.

90a ⟨figure class 61a⟩+≡ (40b) ◁89c 90b▷
```
figure figure::subs(const ex & e, unsigned options) const
{
    exmap m;
    if (e.info(info_flags::list)) {
        lst sl = ex_to<lst>(e);
        for (const auto& i : sl)
            m.insert(std::make_pair(i.op(0), i.op(1)));
    } else if (is_a<relational>(e)) {
        m.insert(std::make_pair(e.op(0), e.op(1)));
    } else
     throw(std::invalid_argument("cycle::subs(): the parameter should be a relational or a lst"));

    return ex_to<figure>(subs(m, options));
}
```

Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, info 37f, m 38g, op 37f, and subs 37f.

90b ⟨figure class 61a⟩+≡ (40b) ◁90a 90c▷
```
ex figure::subs(const exmap & m, unsigned options) const
{
    exhashmap<cycle_node> snodes;
    for (const auto& x: nodes)
        snodes[x.first]=ex_to<cycle_node>(x.second.subs(m, options));

    if (options & do_not_update_subfigure)
        return figure(point_metric.subs(m, options), cycle_metric.subs(m, options), snodes);
    else
        return figure(point_metric.subs(m, options), cycle_metric.subs(m, options), snodes).update_cycles();
}
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, do_not_update_subfigure 39c, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, m 38g, nodes 38e, point_metric 38d, subs 37f, and update_cycles 38b.

90c ⟨figure class 61a⟩+≡ (40b) ◁90b 90d▷
```
ex figure::evalf(int level) const
{
    exhashmap<cycle_node> snodes;
    for (const auto& x: nodes)
        snodes[x.first]=ex_to<cycle_node>(x.second.evalf(level));

    return figure(point_metric.evalf(level), cycle_metric.evalf(level), snodes);
}
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, evalf 37f, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, nodes 38e, and point_metric 38d.

90d ⟨figure class 61a⟩+≡ (40b) ◁90c 91a▷
```
void figure::archive(archive_node &an) const
{
    inherited::archive(an);
    an.add_ex("real_line", real_line);
    an.add_ex("infinity", infinity);
    an.add_ex("point_metric", ex_to<clifford>(point_metric));
    an.add_ex("cycle_metric", ex_to<clifford>(cycle_metric));
    an.add_bool("float_evaluation", float_evaluation);
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses archive 37f, cycle_metric 38d, float_evaluation 38f, infinity 38c, point_metric 38d, and real_line 38c.

exhashmap class does not have an archiving facility, thus we store it as two correponding lists.

91a ⟨figure class 61a⟩+≡ (40b) ◁90d 91b▷

```
    lst keys, cnodes;
   for (const auto& x: nodes) {
        keys.append(x.first);
        cnodes.append(x.second);
    }
    an.add_ex("keys", keys);
    an.add_ex("cnodes", cnodes);
}
```

Uses nodes 38e.

91b ⟨figure class 61a⟩+≡ (40b) ◁91a 91c▷

```
void figure::read_archive(const archive_node &an, lst &sym_lst)
{
    inherited::read_archive(an, sym_lst);
    ex e;
    an.find_ex("point_metric", e, sym_lst);
    point_metric=ex_to<clifford>(e);
    an.find_ex("cycle_metric", e, sym_lst);
    cycle_metric=ex_to<clifford>(e);
    lst all_sym=sym_lst;
    ex keys, cnodes;
    an.find_ex("real_line", real_line, sym_lst);
    all_sym.append(real_line);
    an.find_ex("infinity", infinity, sym_lst);
    all_sym.append(infinity);
    an.find_bool("float_evaluation", float_evaluation);
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.
Uses cycle_metric 38d, ex 40c, float_evaluation 38f, infinity 38c, point_metric 38d, read_archive 37f, and real_line 38c.

91c ⟨figure class 61a⟩+≡ (40b) ◁91b 91d▷

```
    //an.find_ex("keys", keys, all_sym);
    an.find_ex("keys", keys, sym_lst);
    for (const auto& it : ex_to<lst>(keys))
        all_sym.append(it);
    all_sym.sort();
    all_sym.unique();
    an.find_ex("cnodes", cnodes, all_sym);
    lst::const_iterator it1 = ex_to<lst>(cnodes).begin();
    nodes.clear();
    for (const auto& it : ex_to<lst>(keys)) {
        nodes[it]=*it1;
        ++it1;
    }
}
```

Uses nodes 38e.

91d ⟨figure class 61a⟩+≡ (40b) ◁91c 92a▷

```
GINAC_BIND_UNARCHIVER(figure);
```

Defines:
figure, used in chunks 9–13, 17a, 18a, 20a, 25, 26, 33, 34c, 36, 37f, 39c, 40a, 53, 61–70, 72, 73, 80–84, 88–90, 92, 93, and 99b.

92a ⟨figure class 61a⟩+≡ (40b) ◁91d 92b▷

```
bool figure::info(unsigned inf) const
{
    switch (inf) {
    case status_flags::expanded:
        return (inf & flags);
    }
    return inherited::info(inf);
}
```

Uses figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d and info 37f.

F.5.8. *Relations and measurements.* The method to check that two cycles are in a relation.

92b ⟨figure class 61a⟩+≡ (40b) ◁92a 92d▷

```
ex figure::check_rel(const ex & key1, const ex & key2, PCR rel, bool use_cycle_metric, const ex & parameter) const
{
    ⟨run through all cycles in two nodes 92c⟩
```

Defines:
check_rel, used in chunk 15e.
Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, and PCR 33d.

This piece of code is common in *check_rel* and *measure*.

92c ⟨run through all cycles in two nodes 92c⟩≡ (92b 93a)

```
    lst res,
        cycles1=ex_to<lst>(ex_to<cycle_node>(nodes.find(key1)→second)
                           .get_cycle(use_cycle_metric? cycle_metric : point_metric)),
        cycles2=ex_to<lst>(ex_to<cycle_node>(nodes.find(key2)→second)
                           .get_cycle(use_cycle_metric? cycle_metric : point_metric));

    for (const auto& it1 : cycles1)
        for (const auto& it2 : cycles2) {
            lst calc=ex_to<lst>(rel(it1,it2,parameter));
            for (const auto& itr : calc) {
```

Uses cycle_metric 38d, cycle_node 31c 33c 56c 57a 57b 57c 58a 58b 58c 59c 60a 60c, get_cycle 24g 24h, nodes 38e, and point_metric 38d.

We wish to make output homogeneous despite of the fact that *rel* can be of different type: either returning **relational** or not.

92d ⟨figure class 61a⟩+≡ (40b) ◁92b 93a▷

```
                ex e=(itr.op(0)).normal();
                if (is_a<relational>(e))
                    res.append(e);
                else
                    res.append(e==0);
            }
        }

    return res;
}
```

Uses ex 40c and op 37f.

The method to measure certain quantity, it essentially copies code from the previous method.

93a ⟨figure class 61a⟩+≡ (40b) ◁92d 93b▷
```
ex figure::measure(const ex & key1, const ex & key2, PCR rel, bool use_cycle_metric, const ex & parameter) const
{
    ⟨run through all cycles in two nodes 92c⟩
        res.append(itr.op(0));
            }
        }
    return res;
}
```
Defines:
measure, never used.
Uses ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, op 37f, and PCR 33d.

We apply *func* to all cycles in the, figure one-by-one.

93b ⟨figure class 61a⟩+≡ (40b) ◁93a 93c▷
```
ex figure::apply(PEVAL func, bool use_cycle_metric, const ex & param) const
{
    lst res;
    for (const auto& x: nodes) {
        int i=0;
        lst cycles=ex_to<lst>(x.second.get_cycle(use_cycle_metric? cycle_metric : point_metric));
        for (const auto& itc : cycles) {
            res.append(lst(func(itc, param), x.first, i));
            ++i;
        }
    }
    return res;
}
```
Defines:
apply, never used.
Uses cycle_metric 38d, ex 40c, figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d, get_cycle 24g 24h, nodes 38e, and point_metric 38d.

F.5.9. *Default Asymptote styles.* A simple `Asymptote` style. We produce different colours for points, lines and circles. No further options are specified.

93c ⟨figure class 61a⟩+≡ (40b) ◁93b 94a▷
```
string asy_cycle_color(const ex & label, const ex & C, lst & color)
{
    string asy_options="";
    if (is_less_than_epsilon(ex_to<cycle>(C).det())) {// point
        color=lst(0.5,0,0);
        asy_options="dotted";
    } else if (is_less_than_epsilon(ex_to<cycle>(C).get_k())) // straight line
        color=lst(0,0.5,0);
    else  // a proper circle-hyperbola-parabola
        color=lst(0,0,0.5);

    return asy_options;
}
```
Defines:
asy_cycle_color, used in chunk 39a.
Uses ex 40c and is_less_than_epsilon 40d.

A style to place labels.

94a ⟨figure class 61a⟩+≡ (40b) ◁93c 94b▷
```
string label_pos(const ex & label, const ex & C, const string draw_str) {
    stringstream sstr;
    sstr ≪ latex ≪ label;

    string name=ex_to<symbol>(label).get_name(), new_TeXname;

    if (sstr.str() ≡ name) {
        string TeXname;
        ⟨auto TeX name 70d⟩
        if (TeXname_new ≡"")
            new_TeXname=name;
        else
            new_TeXname=TeXname_new;
    } else
        new_TeXname=sstr.str();
```
Defines:
label_pos, used in chunk 39b.
Uses ex 40c, name 22a, and TeXname 22a.

We use *regex* to spot places for labels in the Asymptote output.

94b ⟨figure class 61a⟩+≡ (40b) ◁94a
```
    std::regex draw("([.\\n\\r\\s]*)(draw)\\(([\\w]*,)?((?:\\(.+?\\)|\\{.+?\\}|[^-,0-9\\.])+),([.\\n\\r]*)");
    std::regex dot("([.\\n\\r\\s]*)(dot)\\(([\\w]*,)?((?:\\(.+?\\)|\\{.+?\\}|[^-,0-9\\.])+),([.\\n\\r]*)");
     std::regex e1("symbolLaTeXname");

    if (std::regex_search(draw_str, draw)) {
        string labelstr=std::regex_replace (draw_str, draw,
                        "label($3\"$symbolLaTeXname$\",point($4,0.1),SE);\n",
                        std::regex_constants::format_no_copy | std::regex_constants::format_first_only);
        return std::regex_replace (labelstr, e1, new_TeXname);
    } else if (std::regex_search(draw_str, dot)) {
        string labelstr=std::regex_replace (draw_str, dot,
                        "label($3\"$symbolLaTeXname$\",point($4,0.1),SE);\n",
                        std::regex_constants::format_no_copy);
        return std::regex_replace (labelstr, e1, new_TeXname);
    } else
        return "";
}
```

F.6. **Functions defining cycle relations.** This is collection of linear cycle relations which do not require a parameter.

94c ⟨add cycle relations 94c⟩≡ (40b) 94d▷
```
ex cycle_orthogonal(const ex & C1, const ex & C2, const ex & pr)
{
    return lst((ex)lst(ex_to<cycle>(C1).is_orthogonal(ex_to<cycle>(C2))));
}
```
Defines:
cycle_orthogonal, used in chunks 15b, 27a, 46b, 48, 49a, 51a, 67a, 99, and 100a.
Uses ex 40c and is_orthogonal 13e 27a.

94d ⟨add cycle relations 94c⟩+≡ (40b) ◁94c 95a▷
```
ex cycle_f_orthogonal(const ex & C1, const ex & C2, const ex & pr)
{
    return lst( (ex)lst(ex_to<cycle>(C1).is_f_orthogonal(ex_to<cycle>(C2))));
}
```
Defines:
cycle_f_orthogonal, used in chunks 27b, 48, 49a, and 51a.
Uses ex 40c and is_f_orthogonal 27b.

95a ⟨add cycle relations 94c⟩+≡ (40b) ◁94d 95b▷
```
ex cycle_adifferent(const ex & C1, const ex & C2, const ex & pr)
{
    return lst( (ex)lst(cycle_data(C1).is_almost_equal(ex_to<basic>(cycle_data(C2)),true)? 0: 1));
}
```
Defines:
cycle_adifferent, used in chunks 27d, 48, 49a, 51a, and 100a.
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, and is_almost_equal 98c.

To *check* the tangential property we use the condition from [19, Ex. 5.26(i)]

$$(\langle C_1, C_2\rangle)^2 - \langle C_1, C_1\rangle \langle C_2, C_2\rangle = 0. \tag{17}$$

95b ⟨add cycle relations 94c⟩+≡ (40b) ◁95a 95c▷
```
ex check_tangent(const ex & C1, const ex & C2, const ex & pr)
{
    return lst( (ex)lst(pow(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2)),2)
                -ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))
                 *ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2)) == 0));
}
```
Defines:
check_tangent, used in chunk 15e.
Uses ex 40c.

To *define* tangential property, theoretically we can use (17) as well. However, a system of several such quadratic conditions will be difficult to resolve. Thus, we use a single quadratic relations $\langle C_1, C_1\rangle = -1$ which allows to linearise the tangential property to a pair of identities: $\langle C_1, C_2\rangle \pm \sqrt{\langle C_2, C_2\rangle} = 0$.

95c ⟨add cycle relations 94c⟩+≡ (40b) ◁95b 95d▷
```
ex cycle_tangent(const ex & C1, const ex & C2, const ex & pr)
{
    return lst( lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)==0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                    -sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0),
                lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)==0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                      -sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0),
                lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)==0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                    +sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0),
                lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)==0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                    +sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0));
}
```
Defines:
cycle_tangent, used in chunks 28a, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

95d ⟨add cycle relations 94c⟩+≡ (40b) ◁95c 96a▷
```
ex cycle_tangent_o(const ex & C1, const ex & C2, const ex & pr)
{
    return lst(lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)==0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                     -sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0,
                                lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)==0,
                                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                     -sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))==0));
}
```
Defines:
cycle_tangent_o, used in chunks 28b, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

96a ⟨add cycle relations 94c⟩+≡ (40b) ◁95d 96b▷
```
ex cycle_tangent_i(const ex & C1, const ex & C2, const ex & pr)
{
    return lst(lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)≡0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                      +sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))≡0),
                                lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)≡0,
                                ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2))
                      +sqrt(abs(ex_to<cycle>(C2).cycle_product(ex_to<cycle>(C2))))≡0));
}
```
Defines:
cycle_tangent_i, used in chunks 28b, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

96b ⟨add cycle relations 94c⟩+≡ (40b) ◁96a 96c▷
```
ex cycle_different(const ex & C1, const ex & C2, const ex & pr)
{
    return lst( (ex)lst(ex_to<cycle>(C1).is_equal(ex_to<basic>(C2), true)? 0: 1));
}
```
Defines:
cycle_different, used in chunks 27c, 48, 49a, 51a, and 67a.
Uses ex 40c.

If the cycle product has imaginary part we return the false statement. For a real cycle product we check its sign.

96c ⟨add cycle relations 94c⟩+≡ (40b) ◁96b 96d▷
```
ex product_sign(const ex & C1, const ex & C2, const ex & pr)
{
    if (is_less_than_epsilon(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1)).evalf().imag_part()))
        return lst( (ex)lst(pr*(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1)).evalf() - epsilon) <0));
    else
        return lst( (ex)lst(numeric(1) <0));
}
```
Defines:
product_sign, used in chunks 27, 48, 49a, and 51a.
Uses epsilon 40c, evalf 37f, ex 40c, is_less_than_epsilon 40d, and numeric 12f.

Now we define the relation between cycles to "intersect with certain angle" (but the "intersection" may be imaginary). If cycles are intersecting indeed then the value of pr is the cosine of the angle.

96d ⟨add cycle relations 94c⟩+≡ (40b) ◁96c 96e▷
```
ex cycle_angle(const ex & C1, const ex & C2, const ex & pr)
{
    return lst(lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2).normalize_norm())-pr≡0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)≡0),
               lst(ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C2).normalize_norm())-pr≡0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)≡0));
}
```
Defines:
cycle_angle, used in chunks 28c, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

The next relation defines tangential distance between cycles.

96e ⟨add cycle relations 94c⟩+≡ (40b) ◁96d 97a▷
```
ex steiner_power(const ex & C1, const ex & C2, const ex & pr)
{
    cycle C=ex_to<cycle>(C2).normalize();
    return lst(lst(ex_to<cycle>(C1).cycle_product(C)+sqrt(abs(C.cycle_product(C)))
                    -pr*ex_to<cycle>(C1).get_k()≡0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)≡0),
                                lst(ex_to<cycle>(C1).cycle_product(C)+sqrt(abs(C.cycle_product(C)))
                    -pr*ex_to<cycle>(C1).get_k()≡0,
                    ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)≡0));
}
```
Defines:
steiner_power, used in chunks 28, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

Cross tangential distance is different by a sign of one term.

97a ⟨add cycle relations 94c⟩+≡ (40b) ◁96e 97b▷
```
ex cycle_cross_t_distance(const ex & C1, const ex & C2, const ex & pr)
{
    cycle C=ex_to<cycle>(C2).normalize();
    return lst(lst(ex_to<cycle>(C1).cycle_product(C)-sqrt(abs(C.cycle_product(C)))
                   -pow(pr,2)*ex_to<cycle>(C1).get_k()==0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))+numeric(1)==0),
                                   lst(ex_to<cycle>(C1).cycle_product(C)-sqrt(abs(C.cycle_product(C)))
                   -pow(pr,2)*ex_to<cycle>(C1).get_k()==0,
                   ex_to<cycle>(C1).cycle_product(ex_to<cycle>(C1))-numeric(1)==0));
}
```
Defines:
cycle_cross_t_distance, used in chunks 28f, 48, 49a, and 51a.
Uses ex 40c and numeric 12f.

Check that all coefficients of the first cycle are real.

97b ⟨add cycle relations 94c⟩+≡ (40b) ◁97a 97c▷
```
ex coefficients_are_real(const ex & C1, const ex & C2, const ex & pr)
{
    cycle C=ex_to<cycle>(ex_to<cycle>(C1.evalf()).imag_part());
    if (¬ (is_less_than_epsilon(C.get_k()) ∧ is_less_than_epsilon(C.get_m())))
        return lst( (ex)lst(0));
    for (int i=0; i < ex_to<cycle>(C1).get_dim(); ++i)
        if (¬ is_less_than_epsilon(C.get_l(i)))
            return lst( (ex)lst(0));

    return lst( (ex)lst(1));
}
```
Defines:
coefficients_are_real, used in chunks 27g, 48, 49a, and 51a.
Uses evalf 37f, ex 40c, get_dim() 24f, and is_less_than_epsilon 40d.

F.6.1. *Measured quantities.* This function measures relative powers of two cycles, which turn to be their cycle product for norm-normalised vectors.

97c ⟨add cycle relations 94c⟩+≡ (40b) ◁97b 97d▷
```
ex angle_is(const ex & C1, const ex & C2, const ex & pr)
{
  return lst( (ex)lst(ex_to<cycle>(C1).normalize_norm().cycle_product(ex_to<cycle>(C2).normalize_norm())));
}
```
Defines:
angle_is, never used.
Uses ex 40c.

This function measures relative powers of two cycles, which turn to be their cycle product for k-normalised vectors.

97d ⟨add cycle relations 94c⟩+≡ (40b) ◁97c 97e▷
```
ex power_is(const ex & C1, const ex & C2, const ex & pr)
{
    cycle Ca=ex_to<cycle>(C1).normalize(), Cb=ex_to<cycle>(C2).normalize();

    return lst( (ex)lst(Ca.cycle_product(Cb)+pr*sqrt(abs(Ca.cycle_product(Ca)*Cb.cycle_product(Cb)))));
}
```
Defines:
power_is, never used.
Uses ex 40c.

97e ⟨add cycle relations 94c⟩+≡ (40b) ◁97d 98a▷
```
ex cycle_moebius(const ex & C1, const ex & C2, const ex & pr)
{
    return lst((ex)lst(ex_to<cycle>(C2).matrix_similarity(pr.op(0),pr.op(1),pr.op(2),pr.op(3))));
}
```
Defines:
cycle_moebius, used in chunks 28g, 48, 49a, and 51a.
Uses ex 40c and op 37f.

That relations works only for real matrices, thus we start from the relevant checks.

98a ⟨add cycle relations 94c⟩+≡ (40b) ◁97e 98b▷
```
cycle_relation sl2_transform(const ex & key, bool cm, const ex & matrix) {
    if (is_a<lst>(matrix) ∧ matrix.op(0).info(info_flags::real) ∧ matrix.op(1).info(info_flags::real)
        ∧ matrix.op(2).info(info_flags::real) ∧ matrix.op(3).info(info_flags::real))
            return cycle_relation(key, cycle_sl2, cm, matrix);
    else
        throw(std::invalid_argument("sl2_transform(): shall be applied only with a matrix having"
                                    " real entries"));
}
```
Defines:
`sl2_transform`, never used.
Uses `cycle_relation` 29b 33e 34c 47 48 49a 49b 51a 51b, `cycle_sl2` 35a 98b, `ex` 40c, `info` 37f, `key` 22a, and `op` 37f.

That relations works only in two dimensions, thus we start from the relevant checks.

98b ⟨add cycle relations 94c⟩+≡ (40b) ◁98a
```
ex cycle_sl2(const ex & C1, const ex & C2, const ex & pr)
{
    if (ex_to<cycle>(C2).get_dim() ≡ 2)
        return lst((ex)lst(ex_to<cycle>(C2).sl2_similarity(pr.op(0),pr.op(1),pr.op(2),pr.op(3),
                                                           ex_to<cycle>(C2).get_unit())));
    else
        throw(std::invalid_argument("cycle_sl2(): shall be applied only in two dimensions"));
}
```
Defines:
`cycle_sl2`, used in chunks 48, 49a, 51a, and 98a.
Uses `ex` 40c, `get_dim()` 24f, and `op` 37f.

F.7. **Additional functions.** Equality of **cycle**s.

98c ⟨addional functions 98c⟩≡ (40b) 99a▷
```
bool is_almost_equal(const ex & A, const ex & B)
{
    if ((not is_a<cycle>(A)) ∨ (not is_a<cycle>(B)))
        return false;

    const cycle C1 = ex_to<cycle>(A),
        C2 = ex_to<cycle>(B);
    ex factor=0, ofactor=0;

    // Check that coefficients are scalar multiples of C2
    if (not is_less_than_epsilon((C1.get_m()*C2.get_k()-C2.get_m()*C1.get_k()).normal()))
        return false;
    // Set up coefficients for proportionality
    if (C1.get_k().normal().is_zero()) {
        factor=C1.get_m();
        ofactor=C2.get_m();
    } else {
        factor=C1.get_k();
        ofactor=C2.get_k();
    }
```
Defines:
`is_almost_equal`, used in chunks 31a, 45a, 95a, and 100b.
Uses `ex` 40c and `is_less_than_epsilon` 40d.

Now we iterate through the coefficients of l.

99a ⟨addional functions 98c⟩+≡ (40b) ◁98c 99b▷

```
for (unsigned int i=0; i<C1.get_l().nops(); i++)
 // search the the first non-zero coefficient
 if (factor.is_zero()) {
    factor=C1.get_l(i);
    ofactor=C2.get_l(i);
 } else
    if (¬ is_less_than_epsilon((C1.get_l(i)*ofactor-C2.get_l(i)*factor).normal()))
       return false;
return true;
}
```

Uses is_less_than_epsilon 40d and nops 37f.

99b ⟨addional functions 98c⟩+≡ (40b) ◁99a 99c▷

```
ex midpoint_constructor()
{
   figure SF=ex_to<figure>((new figure)→setflag(status_flags::expanded));

   ex v1=SF.add_cycle(cycle_data(),"variable000");
   ex v2=SF.add_cycle(cycle_data(),"variable001");
   ex v3=SF.add_cycle(cycle_data(),"variable002");
```

Defines:
midpoint_constructor, used in chunk 13a.
Uses add_cycle 13c 22b, cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, and figure 9d 12g 21a 21c 26f 36d 38b 66b 68b 68c 71a 72c 83a 83e 84a 85a 86d 87b 88e 89a 90d 91b 91d.

Join three point by an "interval" cycle.

99c ⟨addional functions 98c⟩+≡ (40b) ◁99b 99d▷

```
   ex v4=SF.add_cycle_rel(lst(cycle_relation(v1,cycle_orthogonal),
                              cycle_relation(v2,cycle_orthogonal),
                              cycle_relation(v3,cycle_orthogonal)),
                          "v4");
```

Uses add_cycle_rel 9f 13e 22c, cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, and ex 40c.

A cycle ortogonal to the above interval.

99d ⟨addional functions 98c⟩+≡ (40b) ◁99c 99e▷

```
   ex v5=SF.add_cycle_rel(lst(cycle_relation(v1,cycle_orthogonal),
                              cycle_relation(v2,cycle_orthogonal),
                              cycle_relation(v4,cycle_orthogonal)),
                          "v5");
```

Uses add_cycle_rel 9f 13e 22c, cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, and ex 40c.

The perpendicular to the interval and the cycle passing the midpoint.

99e ⟨addional functions 98c⟩+≡ (40b) ◁99d 100a▷

```
   ex v6=SF.add_cycle_rel(lst(cycle_relation(v3,cycle_orthogonal),
                              cycle_relation(v4,cycle_orthogonal),
                              cycle_relation(v5,cycle_orthogonal)),
                          "v6");
```

Uses add_cycle_rel 9f 13e 22c, cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, and ex 40c.

The mid point as the intersection point.

100a ⟨addional functions 98c⟩+≡ (40b) ◁99e 100b▷

```
ex r=symbol("result");
SF.add_cycle_rel(lst(cycle_relation(v4,cycle_orthogonal),
                     cycle_relation(v6,cycle_orthogonal),
                     cycle_relation(r,cycle_orthogonal,false),
                     cycle_relation(v3,cycle_adifferent)),
                 r);

return SF;
}
```

Uses add_cycle_rel 9f 13e 22c, cycle_adifferent 24a 95a, cycle_orthogonal 23d 94c, cycle_relation 29b 33e 34c 47 48 49a 49b 51a 51b, and ex 40c.

This is an auxiliary function which removes duplicated cycles from a list L.

100b ⟨addional functions 98c⟩+≡ (40b) ◁100a 100c▷

```
ex unique_cycle(const ex & L)
{
    if(is_a<lst>(L) ∧ (L.nops() > 1) ) {
        lst res;
        lst::const_iterator it = ex_to<lst>(L).begin();
        if (is_a<cycle_data>(*it)) {
            res.append(*it);
            ++it;
            for (; it ≠ ex_to<lst>(L).end(); ++it) {
                bool is_new=true;
                if (¬ is_a<cycle_data>(*it))
                    break; // a non-cycle detected, get out

                for (const auto& it1 : res)
                    if (ex_to<cycle_data>(*it).is_almost_equal(ex_to<basic>(it1),true)
                        ∨ ex_to<cycle_data>(*it).is_equal(ex_to<basic>(it1),true)) {
                        is_new=false; // is a duplicate
                        break;
                    }
                if (is_new)
                    res.append(*it);
            }
            if (it ≡ ex_to<lst>(L).end()) // all are processed, no non-cycle is detected
                return res;
        }
    }
    return L;
}
```

Defines:
unique_cycle, used in chunk 81c.
Uses cycle_data 13c 16c 30e 31a 42a 42b 42c 42d 42e, ex 40c, is_almost_equal 98c, and nops 37f.

The debug output may be switched on and switched off by the following methods.

100c ⟨addional functions 98c⟩+≡ (40b) ◁100b

```
void figure_debug_on() { FIGURE_DEBUG = true; }
void figure_debug_off() { FIGURE_DEBUG = false; }
bool figure_ask_debug_status() { return FIGURE_DEBUG; }
```

Defines:
figure_ask_debug_status, never used.
figure_debug_off, never used.
figure_debug_on, never used.
Uses FIGURE_DEBUG 39d.

Appendix G. Change Log

2.3: The following minor changes are committed:
- The stereometric example is done with the symbolic parameter.
- A concise mathematical introduction is written.
- Re-shape code of figure library.
- Use both symbolic and float checks to analyse newly evaluated cycles.
- Some minor code improvements.

2.2: The following minor changes are committed:
- New cycle relations *moebius_transform* and *sl2_transform* are added.
- Example programme with modular group action is added.
- Method *add_cycle_rel* may take a single relation now.
- Numerous internal fixes.

2.1: The following minor changes are committed:
- The method **figure**::*get_all_keys*() is added
- Debug output may be switched on/off from the code.
- Improvements to documentation.
- Initialisation of cycles in Python wrapper are corrected.

2.0: The two-dimension restriction is removed from the **figure** library. This breaks APIs, thus the major version number is increased.

1.0: First official stable release with all essential functionality.

Appendix H. License

This programme is distributed under GNU GPLv3 [10].

101 ⟨license 101⟩≡ (9–12 17a 18a 20a 30a 39c)

```
// The library for ensembles of interrelated cycles in non-Euclidean geometry
//
// Copyright (C) 2014-2015 Vladimir V. Kisil
//
// This program is free software: you can redistribute it and/or modify
// it under the terms of the GNU General Public License as published by
// the Free Software Foundation, either version 3 of the License, or
// (at your option) any later version.
//
// This program is distributed in the hope that it will be useful,
// but WITHOUT ANY WARRANTY; without even the implied warranty of
// MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
// GNU General Public License for more details.
//
// You should have received a copy of the GNU General Public License
// along with this program. If not, see <http://www.gnu.org/licenses/>.
```

Appendix I. Index of Identifiers

___figure__: 30a, 30c
add_cycle: 11c, 12d, 13c, 18b, 20b, 22b, 67d, 68a, 99b
add_cycle_rel: 9f, 10b, 11e, 12b, 13e, 14a, 14b, 14c, 14d, 14g, 15c, 15d, 18d, 19b, 20c, 22c, 69b, 69c, 69e, 70a, 99c, 99d, 99e, 100a
add_point: 9e, 10b, 13b, 13d, 22a, 66c, 66d
add_subfigure: 14e, 14f, 15a, 22d, 70b, 70c
angle_is: 35b, 97c
apply: 25a, 93b
archive: 31a, 33c, 34c, 36c, 37f, 42c, 48, 49a, 53b, 53c, 59c, 65c, 66b, 90d
asy_animate: 10d, 26a, 26a, 87b
asy_cycle_color: 39a, 93c
asy_draw: 25b, 25b, 85a, 85e, 86d, 87d
asy_write: 9g, 12d, 15f, 16a, 16b, 16c, 16d, 19c, 25c, 25c, 86d
check_rel: 15b, 15e, 23c, 92b
check_tangent: 15e, 23f, 95b
coefficients_are_real: 24c, 27g, 48, 49a, 51a, 97b
cross_t_distance: 28f
cycle_adifferent: 24a, 27d, 48, 49a, 51a, 95a, 100a
cycle_angle: 28c, 34e, 48, 49a, 51a, 96d
cycle_cross_t_distance: 28f, 34e, 48, 49a, 51a, 97a
cycle_data: 13c, 16c, 16d, 30e, 31a, 34b, 40a, 40e, 41a, 41b, 41c, 42a, 42b, 42c, 42d, 42e, 43a, 43b, 43c, 44a, 45a, 45c, 45d, 46a, 50a, 55a, 56d, 57b, 57c, 58a, 61c, 61d, 67a, 67b, 69c, 70b, 71c, 73d, 75c, 79c, 81b, 82b, 95a, 99b, 100b
cycle_different: 23g, 27c, 48, 49a, 51a, 67a, 96b
cycle_f_orthogonal: 23e, 27b, 48, 49a, 51a, 94d
cycle_metric: 24e, 24g, 38d, 61a, 62c, 63b, 63c, 63d, 63e, 64b, 64d, 65a, 80c, 81b, 82a, 86a, 89b, 89c, 90b, 90c, 90d, 91b, 92c, 93b
cycle_moebius: 28g, 35a, 48, 49a, 51a, 97e
cycle_node: 21c, 31c, 32a, 33c, 33e, 34b, 34c, 36a, 36c, 37e, 38e, 40a, 50a, 50b, 54b, 54c, 54d, 54e, 55a, 55c, 55d, 55e, 56a, 56b, 56c, 56d, 57a, 57b, 57c, 57d, 57e, 58a, 58b, 58c, 59a, 59b, 59c, 60a, 60c, 61c, 61d, 62c, 65a, 67a, 67b, 67d, 69c, 70b, 73a, 82c, 82d, 83d, 89b, 89c, 90b, 90c, 92c
cycle_orthogonal: 15b, 23d, 27a, 46b, 48, 49a, 51a, 67a, 94c, 99c, 99d, 99e, 100a
cycle_orthogonal_e: 35e
cycle_orthogonal_h: 35e
cycle_orthogonal_p: 35e
cycle_power: 28d
cycle_relation: 27a, 27b, 27c, 27d, 27e, 27f, 27g, 28a, 28b, 28c, 28d, 28e, 28f, 28g, 29a, 29b, 31b, 33c, 33e, 34a, 34c, 40a, 46b, 46c, 46d, 47, 48, 49a, 49b, 50a, 51a, 51b, 52a, 52b, 57e, 58a, 59c, 67a, 69b, 69c, 70a, 80c, 81b, 98a, 99c, 99d, 99e, 100a
cycle_sl2: 35a, 48, 49a, 51a, 98a, 98b
cycle_tangent: 28a, 34e, 48, 49a, 51a, 95c
cycle_tangent_i: 28b, 34e, 48, 49a, 51a, 96a
cycle_tangent_o: 28b, 34e, 48, 49a, 51a, 95d
do_not_update_subfigure: 39c, 54a, 90b
epsilon: 40c, 40d, 96c
evalf: 15e, 19a, 19d, 37f, 40d, 74a, 75e, 78e, 80a, 86a, 90c, 96c, 97b
ex: 9e, 9f, 10b, 11b, 11c, 11e, 12b, 12d, 13b, 13c, 13d, 13e, 14a, 14b, 14c, 14d, 14e, 14f, 14g, 15a, 15c, 15d, 18a, 18b, 20a, 20b, 21a, 21b, 21c, 22a, 22b, 22c, 22d, 22e, 22f, 22g, 23a, 23b, 23c, 23d, 23e, 23f, 23g, 24a, 24b, 24c, 24d, 24e, 24f, 24g, 24h, 24i, 25a, 25b, 25c, 26a, 26d, 27a, 27b, 27c, 27d, 27e, 27f, 27g, 28a, 28b, 28c, 28d, 28e, 28f, 28g, 29a, 29b, 29c, 29d, 29e, 30f, 31a, 32a, 32b, 32c, 32d, 32g, 32h, 33a, 33c, 33d, 33e, 34a, 34b, 34c, 34e, 35a, 35b, 35d, 35e, 36a, 36b, 37a, 37b, 37d, 37f, 38a, 38c, 38d, 38g, 39a, 39b, 40c, 40d, 41a, 41b, 43a, 43b, 43c, 44a, 45a, 45c, 45d, 46a, 46c, 48, 49a, 50a, 51a, 52a, 52b, 52d, 53c, 54a, 54c, 54e, 55c, 55d, 56a, 56b, 56d, 57a, 57b, 57c, 58c, 59a, 59b, 60a, 61e, 62a, 63a, 63b, 63d, 64a, 64b, 65a, 66c, 66d, 67d, 68a, 68b, 68c, 69b, 69c, 69e, 70a, 70b, 70c, 71a, 72c, 73b, 74a, 75e, 76a, 78c, 80b, 83a, 83c, 83d, 84a, 84d, 85a, 86d, 87b, 87e, 89b, 89c, 90a, 90b, 90c, 91b, 92b, 92d, 93a, 93b, 93c, 94a, 94c, 94d, 95a, 95b, 95c, 95d, 96a, 96b, 96c, 96d, 96e, 97a, 97b, 97c, 97d, 97e, 98a, 98b, 98c, 99b, 99c, 99d, 99e, 100a, 100b
figure: 9b, 9d, 10a, 11a, 12e, 12g, 13a, 17a, 18a, 20a, 21a, 21c, 25c, 26a, 26b, 26c, 26f, 33c, 33e, 34c, 36a, 36c, 36d, 37f, 38b, 39c, 40a, 53b, 53c, 61a, 61e, 62a, 62c, 63a, 63d, 64a, 64b, 65a, 65c, 66b, 66c, 66d, 67d, 68a, 68b, 68c, 69b, 69c, 69e, 70a, 70b, 70c, 71a, 72a, 72c, 73a, 73b, 73e, 80b, 81d, 82a, 82c, 83a, 83c, 83d, 83e, 84a, 84d, 85a, 86d, 87b, 88d, 88e, 89a, 89b, 89c, 90a, 90b, 90c, 90d, 91b, 91d, 92a, 92b, 93a, 93b, 99b
figure_ask_debug_status: 29f, 100c
FIGURE_DEBUG: 39d, 58a, 65c, 66b, 67c, 67d, 68b, 69a, 69d, 71a, 72b, 73a, 83d, 86a, 86c, 89a, 100c
figure_debug_off: 29f, 100c, 100c
figure_debug_on: 29f, 100c, 100c
float_evaluation: 26c, 38f, 74a, 75e, 80a, 81d, 90d, 91b
freeze: 10a, 26b
get_all_keys: 11d, 12b, 23b, 83c
get_cycle: 19a, 20d, 24g, 24h, 31a, 32d, 43c, 50c, 56d, 82a, 83d, 85c, 92c, 93b
get_cycle_label: 23a, 82a, 84d
get_cycle_metric: 24e, 62c

get_cycle_node: 37d
get_dim(): 24f, 31a, 41b, 44b, 45b, 46a, 61b, 62a, 63b, 63d, 63e, 64b, 64d, 64e, 66d, 67a, 71a, 73c, 82b, 83a, 83b, 85b, 97b, 98b
get_infinity: 10b, 19b, 37d
get_point_metric: 11b, 24e, 62c
get_real_line: 9f, 10b, 37d
GHOST_GEN: 23b, 30d, 30d, 67a, 68d, 72e, 83c, 89a
infinity: 37d, 38c, 61a, 61c, 61e, 62d, 65a, 65c, 67a, 89b, 89c, 90d, 91b
INFINITY_GEN: 30d, 30d, 61c, 62d
info: 37f, 59a, 67c, 69d, 70b, 72a, 80d, 82c, 84a, 90a, 92a, 98a
is_adifferent: 14b, 14c, 14g, 27d
is_almost_equal: 31a, 45a, 95a, 98c, 100b
is_different: 27c
is_f_orthogonal: 27b, 94d
is_less_than_epsilon: 40d, 45a, 45b, 46a, 76a, 76c, 78c, 79a, 81c, 86a, 93c, 96c, 97b, 98c, 99a
is_orthogonal: 9f, 10b, 13e, 14a, 14b, 14c, 14d, 14g, 18d, 19b, 27a, 35e, 94c
is_real_cycle: 18d, 20c, 27e
is_tangent: 20c, 28a
is_tangent_i: 15c, 15d, 19b, 28b
is_tangent_o: 15c, 15d, 28b
k: 11e, 12b, 24g, 24h, 30f, 31a, 32h, 35d, 37d, 38g, 40e, 41a, 41b, 42b, 42c, 42d, 43a, 43b, 43c, 44a, 45a, 45c, 45d, 46a, 46c, 57b, 61a, 61e, 65a, 65c, 82b
key: 22a, 22b, 22c, 22d, 22e, 22f, 22g, 26d, 27a, 27b, 27c, 27d, 27e, 27f, 27g, 28a, 28b, 28c, 28d, 28e, 28f, 28g, 29a, 29b, 33e, 36a, 37a, 38c, 66c, 66d, 67a, 67b, 67c, 67d, 68a, 68b, 68c, 68d, 69a, 69b, 69c, 69d, 70b, 71a, 71b, 71c, 72a, 72b, 72c, 72d, 72e, 73a, 80b, 80c, 81a, 81c, 81d, 82a, 82b, 83d, 98a
l: 30f, 31a, 32h, 38g, 40e, 41a, 41b, 42b, 42c, 42d, 43a, 43b, 43c, 45c, 45d, 46a, 51a, 52d, 57b, 59a, 61a, 61e, 64e, 65a, 65c, 70c, 82b
label_pos: 39b, 94a
m: 30f, 31a, 32a, 32h, 37f, 38g, 40e, 41a, 41b, 42b, 42c, 42d, 43a, 43b, 43c, 44a, 45a, 45c, 45d, 46a, 51a, 57b, 61a, 61e, 65a, 65c, 82b, 90a, 90b
main: 9b, 10a, 11a, 12e, 17a, 18a, 20a
make_angle: 18d, 28c
measure: 19d, 24d, 93a
metric_e: 35d, 35e
metric_h: 35d, 35e
metric_p: 35d, 35e
midpoint_constructor: 13a, 29d, 99b
MoebInv: 9c, 30b, 30c, 39c, 40b
moebius_transform: 11e, 28g
move_cycle: 16c, 16d, 22f, 68c
move_point: 16a, 16b, 16d, 22e, 71a, 72a
name: 22a, 22b, 22c, 22d, 23a, 25c, 26a, 64e, 66c, 67a, 68a, 69e, 70a, 70c, 70d, 82a, 84d, 86d, 87a, 87b, 88c, 94a
nodes: 26d, 37d, 37e, 37f, 38e, 61c, 61d, 62c, 65b, 67a, 67b, 67c, 67d, 68b, 68c, 68d, 69a, 69c, 69d, 70b, 71a, 71b, 71c, 72a, 72b, 72c, 72d, 72e, 73a, 80b, 80c, 81a, 81b, 81d, 82a, 82b, 82c, 83c, 83d, 83e, 84a, 84b, 84d, 85c, 89a, 89b, 89c, 90b, 90c, 91a, 91c, 92c, 93b
nops: 20d, 31a, 33c, 34c, 37f, 43a, 43b, 52a, 52b, 56a, 56b, 57e, 59c, 62b, 63e, 66d, 67a, 68b, 68d, 71a, 71b, 71c, 72a, 73e, 74a, 74b, 74d, 75a, 75b, 75c, 76a, 76b, 76c, 77b, 77c, 79d, 81a, 81d, 82c, 84a, 89b, 89c, 99a, 100b
numeric: 10c, 11c, 12d, 12f, 13d, 16a, 16b, 16d, 18a, 18b, 18d, 20b, 28g, 29a, 46a, 61b, 61c, 61d, 63b, 64e, 67a, 71b, 71c, 73c, 76a, 76b, 76c, 77a, 77c, 77d, 78a, 82b, 86a, 95c, 95d, 96a, 96c, 96d, 96e, 97a
only_reals: 19b, 20c, 27g
op: 11e, 20d, 24f, 31a, 32d, 33c, 34c, 37f, 41b, 43a, 46a, 52a, 56a, 57e, 59a, 62a, 63c, 63d, 63e, 64b, 64d, 67a, 67d, 71c, 74a, 74b, 74c, 75b, 75e, 76a, 76b, 76c, 77a, 77b, 77c, 77d, 78a, 78c, 78d, 79a, 79c, 80c, 81d, 82a, 86a, 89b, 90a, 92d, 93a, 97e, 98a, 98b
PCR: 23c, 24d, 29b, 33d, 33e, 34a, 46c, 92b, 93a
point_metric: 24e, 24f, 24g, 38d, 61a, 62a, 62b, 62c, 63b, 63c, 65a, 80c, 81b, 82a, 85c, 86a, 89b, 89c, 90b, 90c, 90d, 91b, 92c, 93b
power_is: 35b, 97d
product_nonpositive: 27f
product_sign: 24b, 27e, 27f, 48, 49a, 51a, 96c
read_archive: 31a, 33c, 34c, 36c, 37f, 42d, 49a, 53c, 60a, 91b
real_line: 37d, 38c, 61a, 61d, 61e, 62a, 62b, 62d, 63b, 63c, 63d, 63e, 65a, 65c, 89b, 89c, 90d, 91b
REAL_LINE_GEN: 30d, 30d, 61d, 62d, 85c
realsymbol: 17b, 18d, 20c, 61a, 61e, 64e, 65a, 65c, 79c
remove_cycle_node: 22g, 72c
reset_figure: 21d, 83e
rgb: 12a, 12b, 13f, 14d, 15c, 15d, 18c, 18d, 19b, 25b, 25c, 26a
save: 26e, 26e, 66b, 87d
set_asy_style: 12a, 12b, 13f, 14a, 14d, 15c, 15d, 18c, 18d, 19b, 26d
set_cycle: 37a, 68b, 68c, 82a

set_exact_eval: 26c, 81d
set_float_eval: 26c, 81d
set_metric: 16d, 21b, 82a, 83a
sl2_transform: 12b, 29a, 98a
sq_cross_t_distance_is: 19d, 35b
sq_t_distance_is: 35b
steiner_power: 28d, 28e, 34e, 48, 49a, 51a, 96e
subfigure: 29c, 31d, 36a, 36c, 40a, 52c, 52d, 52e, 53a, 53b, 53c, 53d, 53e, 54a, 57e, 58a, 70b, 81d, 82a
subs: 11e, 31a, 32a, 34a, 36a, 37f, 41b, 45c, 45d, 54a, 59a, 59b, 67d, 75c, 75e, 76b, 76c, 77a, 77b, 77c, 77d, 78a, 78c, 78d, 79a, 79b, 79d, 87d, 90a, 90b
tangential_distance: 18d, 28e
TeXname: 22a, 22b, 22c, 22d, 66c, 68a, 69e, 70a, 70c, 70d, 94a
unfreeze: 10a, 26b, 87d
unique_cycle: 29e, 81c, 100b
update_cycle_node: 37a, 67c, 69d, 70b, 72a, 80b, 81c, 82c, 84b
update_cycles: 38b, 82c, 83b, 90b
update_node_lst: 38a, 69a, 72a, 72b, 82d, 84a

School of Mathematics, University of Leeds, Leeds LS2 9JT, England
E-mail address: kisilv@maths.leeds.ac.uk
URL: http://www.maths.leeds.ac.uk/~kisilv/